




catalogue 25th edition

your guide to
washroom equipment



mediclinics


info@hygiene-shop.eu - www.hygiene-shop.eu



“Our aim is to offer comprehensive solutions for your needs in bathroom appliances, with innovatively designed and high-performance products.”



Over **40 years** providing solutions



Starts the
Commercial
activity

19
74



Saniflow E-85
Production
begins

19
85



The Export activity
starts

19
88



First steps
of Saniflow
Corp (USA)

20
03




ons for washroom equipment



New logistics
and assembly
plant in
Barcelona

20
06



Welcome to
Mediclinics
Italy

20
09



Sales in over
100 countries

20
11



Launching of
the Dualflow
plus "hands-in"
hand dryer

20
12



Mediclinics
Baby Changing
Stations are
marketed

20
16



Strengths



Innovation

Our own R&D&i department, which is made up of highly qualified engineers and includes a test laboratory for our products. These resources enable Mediclinics to design and develop new products and industrialise the manufacturing processes for these products.



Production

Our own flexible, modern and efficient production lines, where qualified and trained personnel are responsible for manufacturing our products with excellent quality.



Quality

The Mediclinics Quality department, made up of highly experienced and knowledgeable professionals, is responsible for ensuring the quality of the product. Moreover, all the company's processes are certified in accordance with the EN ISO9001 international quality standard



Certifications

Our products meet the market's most demanding safety and quality standards. Mediclinics, through external laboratories, such as VDE (Verband der Elektrotechnik und Elektronik), TÜV Rheinland and UL (Underwriters Laboratories), guarantees the quality and safety of its products.



Logistics

Central warehouse of more than 6000 m2, equipped with the most modern storage systems and handling equipment that ensures rapid and efficient preparation, packaging and shipping of orders.



Customer care

Professional, responsive and highly qualified sales and customer care team who guarantee a unique service to all our customers, and provide a solution to all your needs and problems.

International References

USA & CANADA

- Wal-Mart Stores & Superstores Nationwide, USA
- White House Visitors Center, Washington, USA
- Dodger's Stadium, Los Angeles, California, USA
- YMCA Of New York City, New York, USA
- Texas Department of Transportation, Texas, USA
- Delaware State Fairgrounds, Delaware, USA
- Penn State University, Pennsylvania, USA
- University of California - Berkeley, Vance Brown Bldf, California, USA
- United Airlines VIP red Carpet Clubs, nationwide, USA
- Polo Park shopping Center, Winnipeg, Manitoba, Canada

- La Casona Theatre, Buenos Aires, Argentina
- Executive's Tower of the President's Offices, Montevideo, Uruguay
- City Courts of Justice Complex, Santiago de Chile, Chile
- Universidad Autónoma Metropolitana, Mexico City, Mexico
- Shopping Center Miraflores, Guatemala city, Guatemala
- Cines Cineplex, Perú
- Ferryboat Central Station "Buque-Bus", Buenos Aires, Argentina
- Monterrey International Airport, Mexico
- Franquicias Kokoriko, Colombia
- Mental Hospital Alemán, Concepción, Chile

LATIN AMERICA

- F1 Racetracks of Abu Dhabi & Bahrain
- Alexander Museum, Tel Aviv, Israel
- Royal Opera House, Muscat, Oman
- Victoria & Alfred Waterfront, Capetown, South Africa
- Istanbul Airport, Turkey
- Lebanon University Campus, Beirut, Lebanon
- Meydan Racecourse, Dubai, UAE
- Kenya Commercial Bank Headquarters, Nairobi, Kenya
- Ibn Battouta Olympic Stadium, Tanger, Morocco
- Canadian High Commission, Nairobi, Kenya

AFRICA & MIDDLE EAST

EUROPE

- Football stadium Camp Nou, Barcelona, Spain
- Football stadium Santiago Bernabeu, Madrid, Spain
- Ikea stores across Europe
- Queen Mary, University of London, UK
- European Parliament, Brussels, Belgium
- United Nations Headquarters, Frankfurt, Germany
- Charles de Gaulle International Airport, Paris, France
- National Museum, Warsaw, Poland
- Pirelli headquarters building, Torino, Italy
- Hotel Epic Sana, Lisboa, Portugal

ASIA

- National University of Singapore, Singapore
- Crown Regency Hotel, Manila, The Philippines
- Bitexco Financial Tower, Ho Chi Minh City, Vietnam
- Hong Kong MTR Stations, Hong Kong
- Bandaranaike International Airport, Colombo, Sri Lanka
- Chennai International Airport, India
- Bangsar Shopping Vailage, Kuala Lumpur, Malaysia
- Sentosa Island Theme Park, Singapore
- Hong Kong University, Centennial Campus, Hong Kong
- Lam Tin North Municipal Services Building, Hong Kong

- Sydney Opera House and Casino, Australia
- Auckland Super City Council, New Zealand
- Sidney International Airport, Australia
- The National Maritime Museum, Sydney, Australia
- Museum of New Zealand Te Papa Tongarewa, Wellington, New Zealand
- State Transit Authority of NSW's Head Office, Mona Vale, Australia
- Top Ride city shopping mall at Central North, Ryde, Australia
- Sydney Olympics Venues, Australia
- Manly Wharf, Sidney, Australia
- The Crown Casino, Melbourne, Australia

OCEANIA



Departures

| Time | Flight | Destination | Gate |
|-------|---------|---------------|------|
| 12:00 | 00 1561 | NEW YORK | 06 |
| 12:15 | PH 0034 | CHICAGO | 10 |
| 12:20 | T3 0528 | LAS VEGAS | 32 |
| 12:30 | PH 2415 | HONOLULU | 14 |
| 12:50 | G1 1872 | SAN FRANCISCO | 09 |
| 12:55 | T3 0544 | WASHINGTON | 27 |
| 13:20 | SF 2778 | HOUSTON | 20 |
| 13:45 | 00 0061 | MIAMI | 31 |
| 13:50 | BK 1532 | BOSTON | 04 |
| 14:05 | 00 3487 | NEW YORK | 12 |
| 14:30 | PH 0194 | ATLANTA | 03 |
| 14:35 | SF 0028 | CHICAGO | 08 |



Scotland 2 90 FIFA 90 2 France





Hand Wash














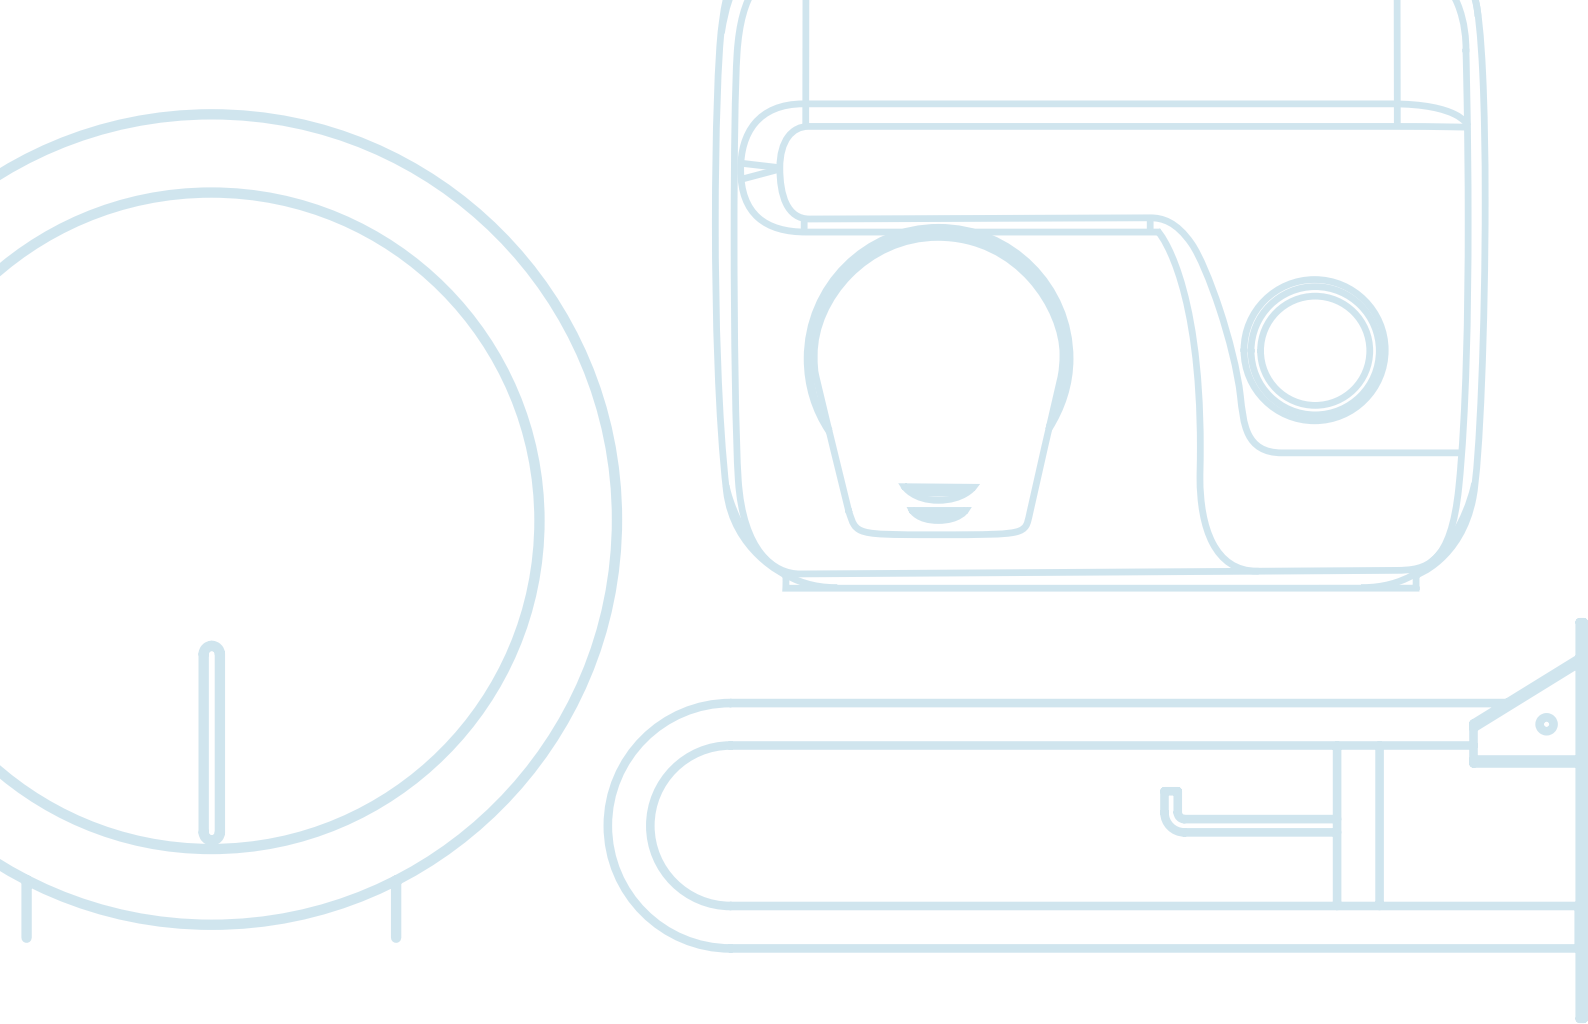

20–65

HAND DRYERS

102–109

PAPER TOWEL
DISPENSER

148–163

GRAB BARS AND OTHER
ACCESSORIES

184–187

SIGNAGE

66–75

HAIR DRYERS

110–119

WASTE RECEPTABLES
AND BINS

164–167

BABY CHANGING
STATIONS

188–204

ANNEXES

76–89

SOAP DISPENSERS

120–127

MULTI-PURPOSE
CABINETS

168–179

STAINLESS STEEL
SANITARY PRODUCTS

205–208

PRODUCT LIST

90–101

TOILET PAPER
DISPENSERS


128–147

BATHROOM
ACCESSORIES

180–183


DRINKING WATER
FOUNTAINS


| | | | | |
|--|---|---------|---------------------------|---------|
| HAND DRYERS | Dualflow® plus | 26-29 | Optima® | 56-57 |
| | Machflow® | 30-35 | Juniorplus® | 58-59 |
| | Speedflow® | 36-39 | Smartflow® | 60-51 |
| | Saniflow® | 42-49 | Mediclinics hand dryers | 62-65 |
| | Mediflow® | 50-53 | comparative chart table | |
| HAIR DRYERS | Public use | | | 69-70 |
| | Individual use | | | 71-73 |
| | Table | | | 74-75 |
| SOAP DISPENSERS | Automatic | | | 79-80 |
| | Push-button | | | 81-87 |
| | Table | | | 88-89 |
| TOILET PAPER DISPENSERS | Industrial | | | 93-94 |
| | Standard / Adjustable to industrial | | | 95-97 |
| | Other | | | 98-99 |
| | Table | | | 100-101 |
| PAPER TOWEL DISPENSERS | C/Z folder paper towel | | | 105 |
| | Roll | | | 106-107 |
| | Table | | | 108-109 |
| WASTE RECEPTABLES AND BINS | Bins | | | 113-115 |
| | Sanitary napkin containers | | | 116 |
| | Pedal bins | | | 117 |
| | Table | | | 118-119 |
| MULTI-PURPOSE CABINETS | Counters | | | 123 |
| | Mirror cabinet | | | 124 |
| | Paper towel dispensers + Saniflow + bin | | | 125 |
| | Paper towel dispensers + bin | | | 126 |
| | Table | | | 127 |
| BATHROOM ACCESSORIES | Medinox series | | | 131-135 |
| | Medisteel series | | | 136-141 |
| | Medicrom series | | | 142-147 |
| GRAB BARS AND OTHER ACCESSORIES | Medinox stainless steel | | | 151-155 |
| | Mediepoxy steel | | | 156-158 |
| | Table of grab bars | | | 159 |
| | Seats | | | 160-161 |
| | Mirrors | | | 162-163 |
| BABY CHANGING | Baby changing stations | | | 166-167 |
| STAINLESS STEEL SANITARY WARE | Wash basin | | | 171 |
| | Wall sinks | | | 172-174 |
| | Shower trays | | | 175 |
| | Urinals / toilet | | | 176-178 |
| | Table | | | 179 |
| DRINKING WATER FOUNTAINS | Drinking water fountains | | | 183 |
| SIGNAGES | Signages | | | 187 |
| ANNEXES | Mediclinics BIM project | 190-191 | Point of sale advertising | 199 |
| | Summary of recessed range | 192 | Certifications | 200-201 |
| | Installation examples | 193-197 | World Wide Job References | 202-203 |
| | Advice on cleaning stainless steel | 198 | Logistics information | 204 |
| PRODUCT LIST | Product list | | | 206-207 |

The logo consists of the letters 'OI' in a bold, black, sans-serif font. The 'O' is a solid black circle, and the 'I' is a thick vertical bar with a small horizontal tick at the top.

HAND DRYERS

designed to care your hands

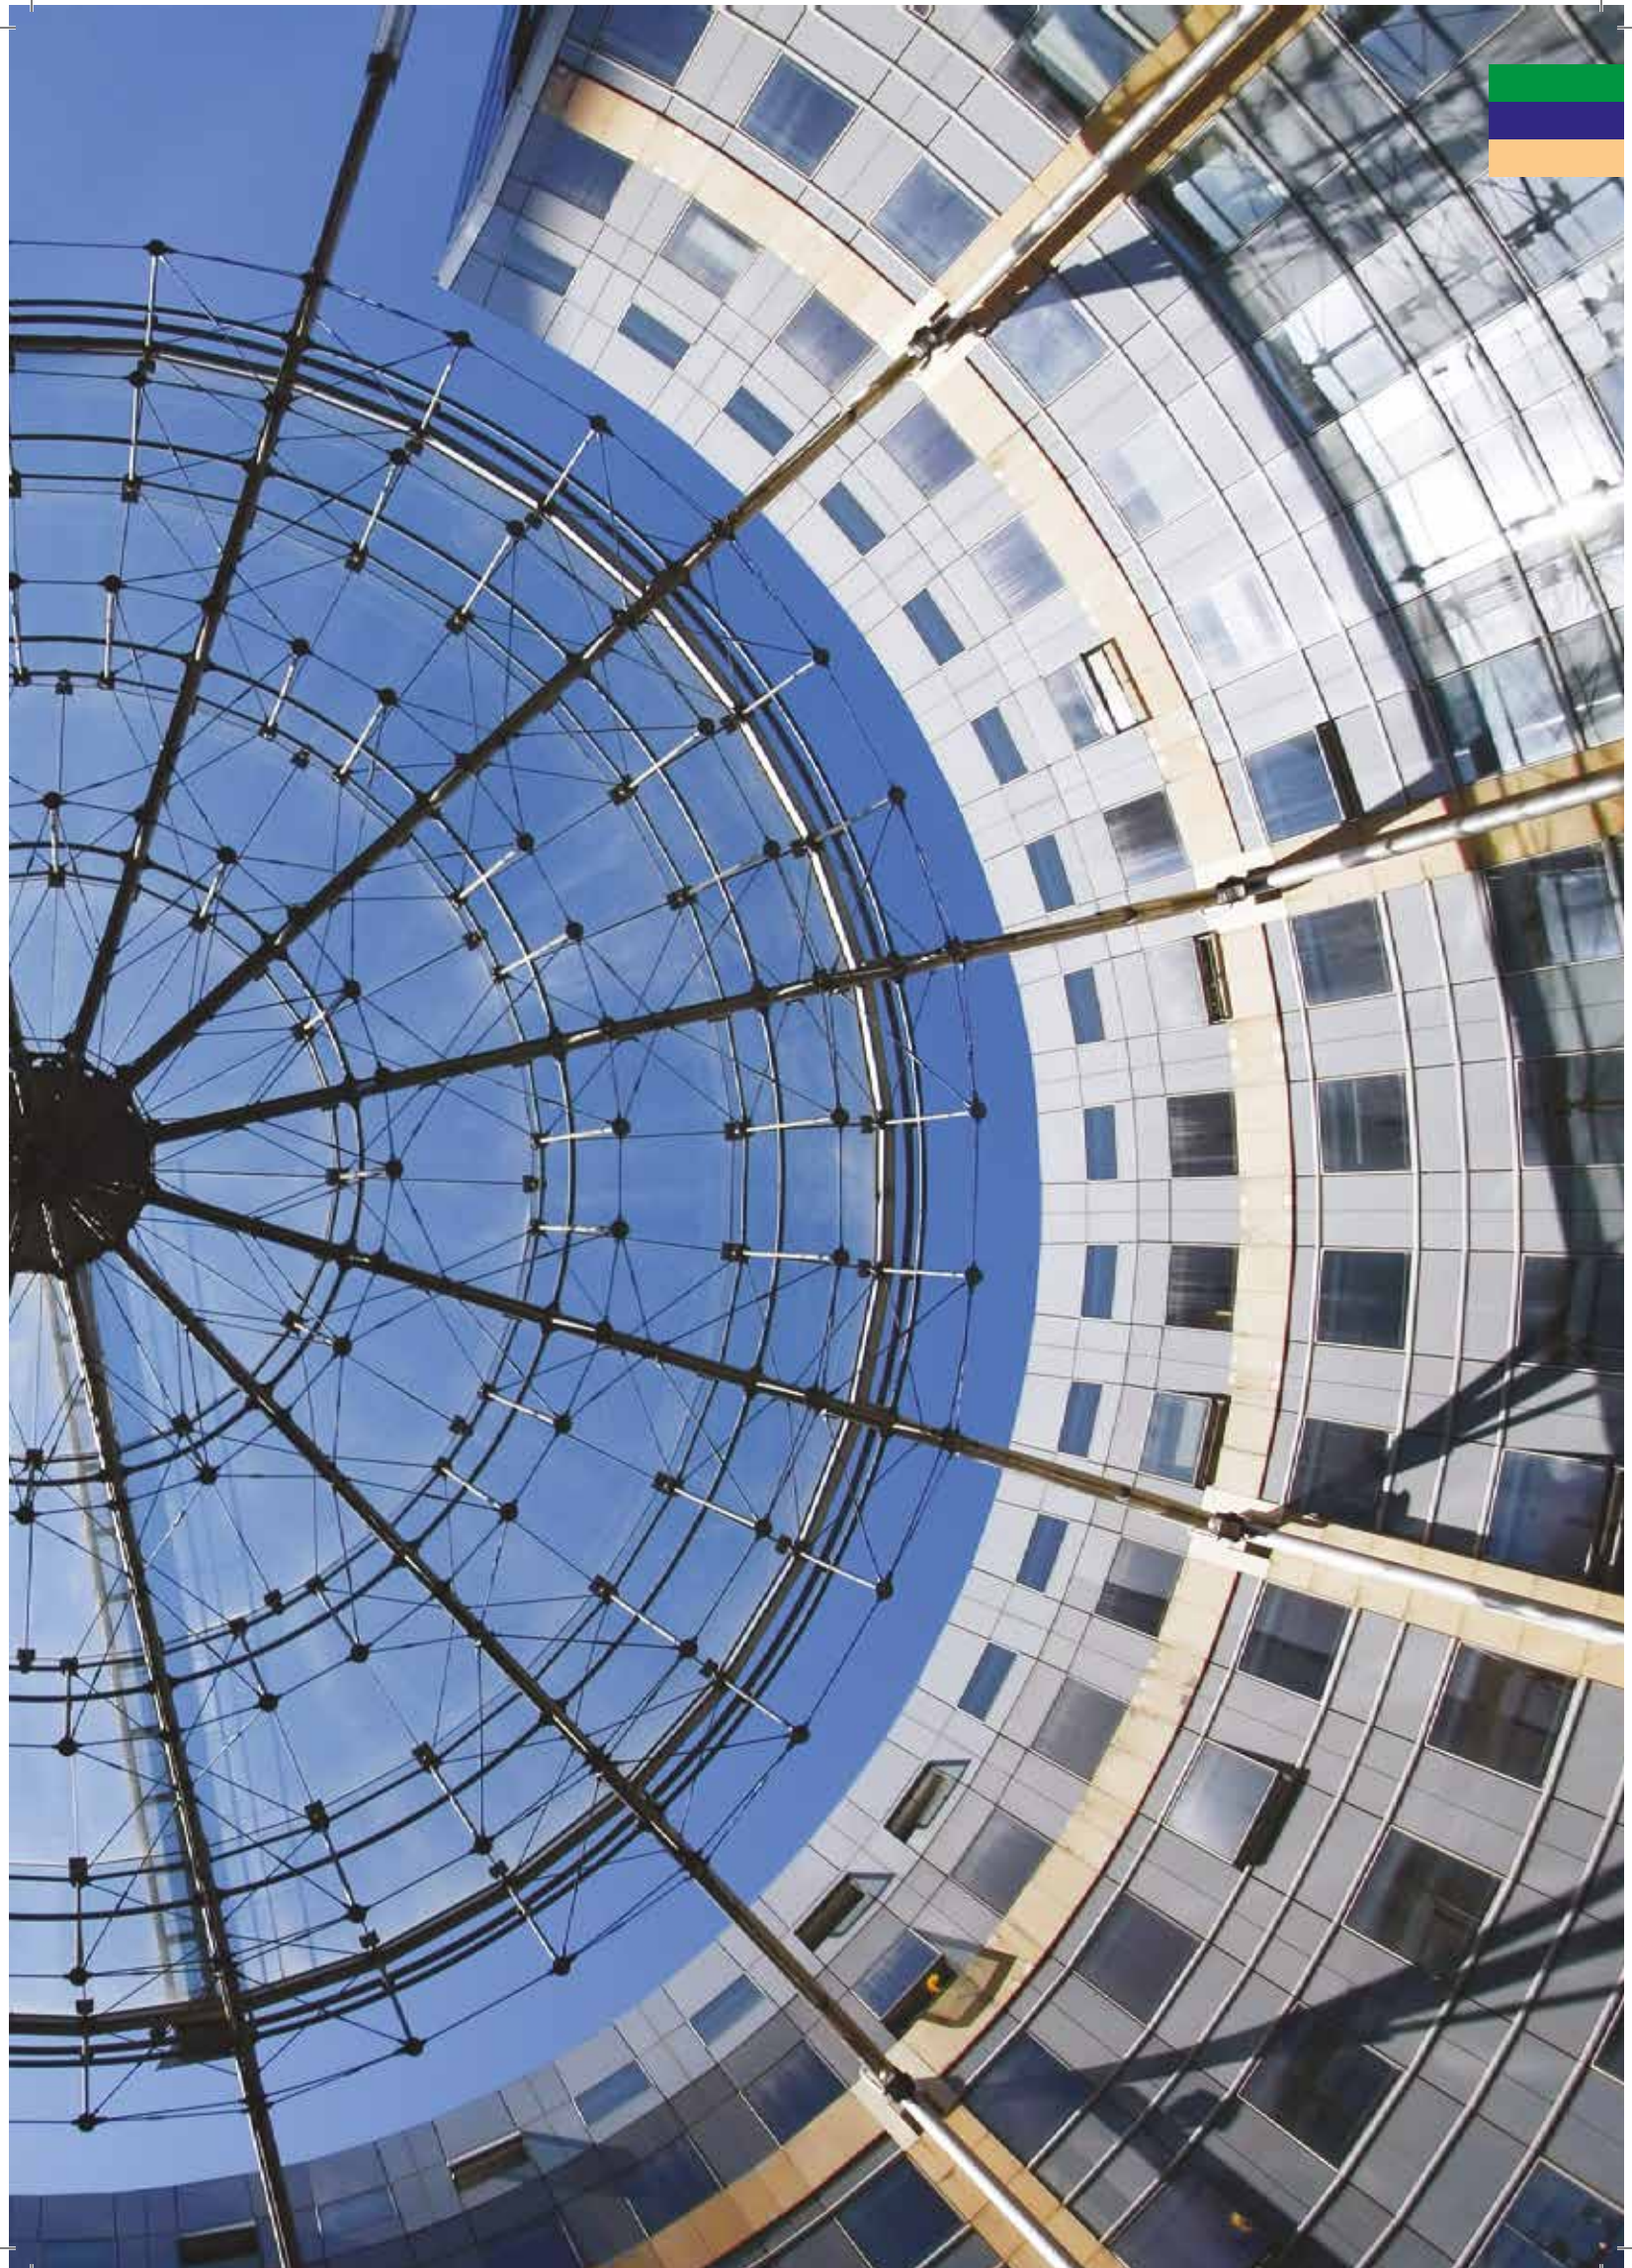

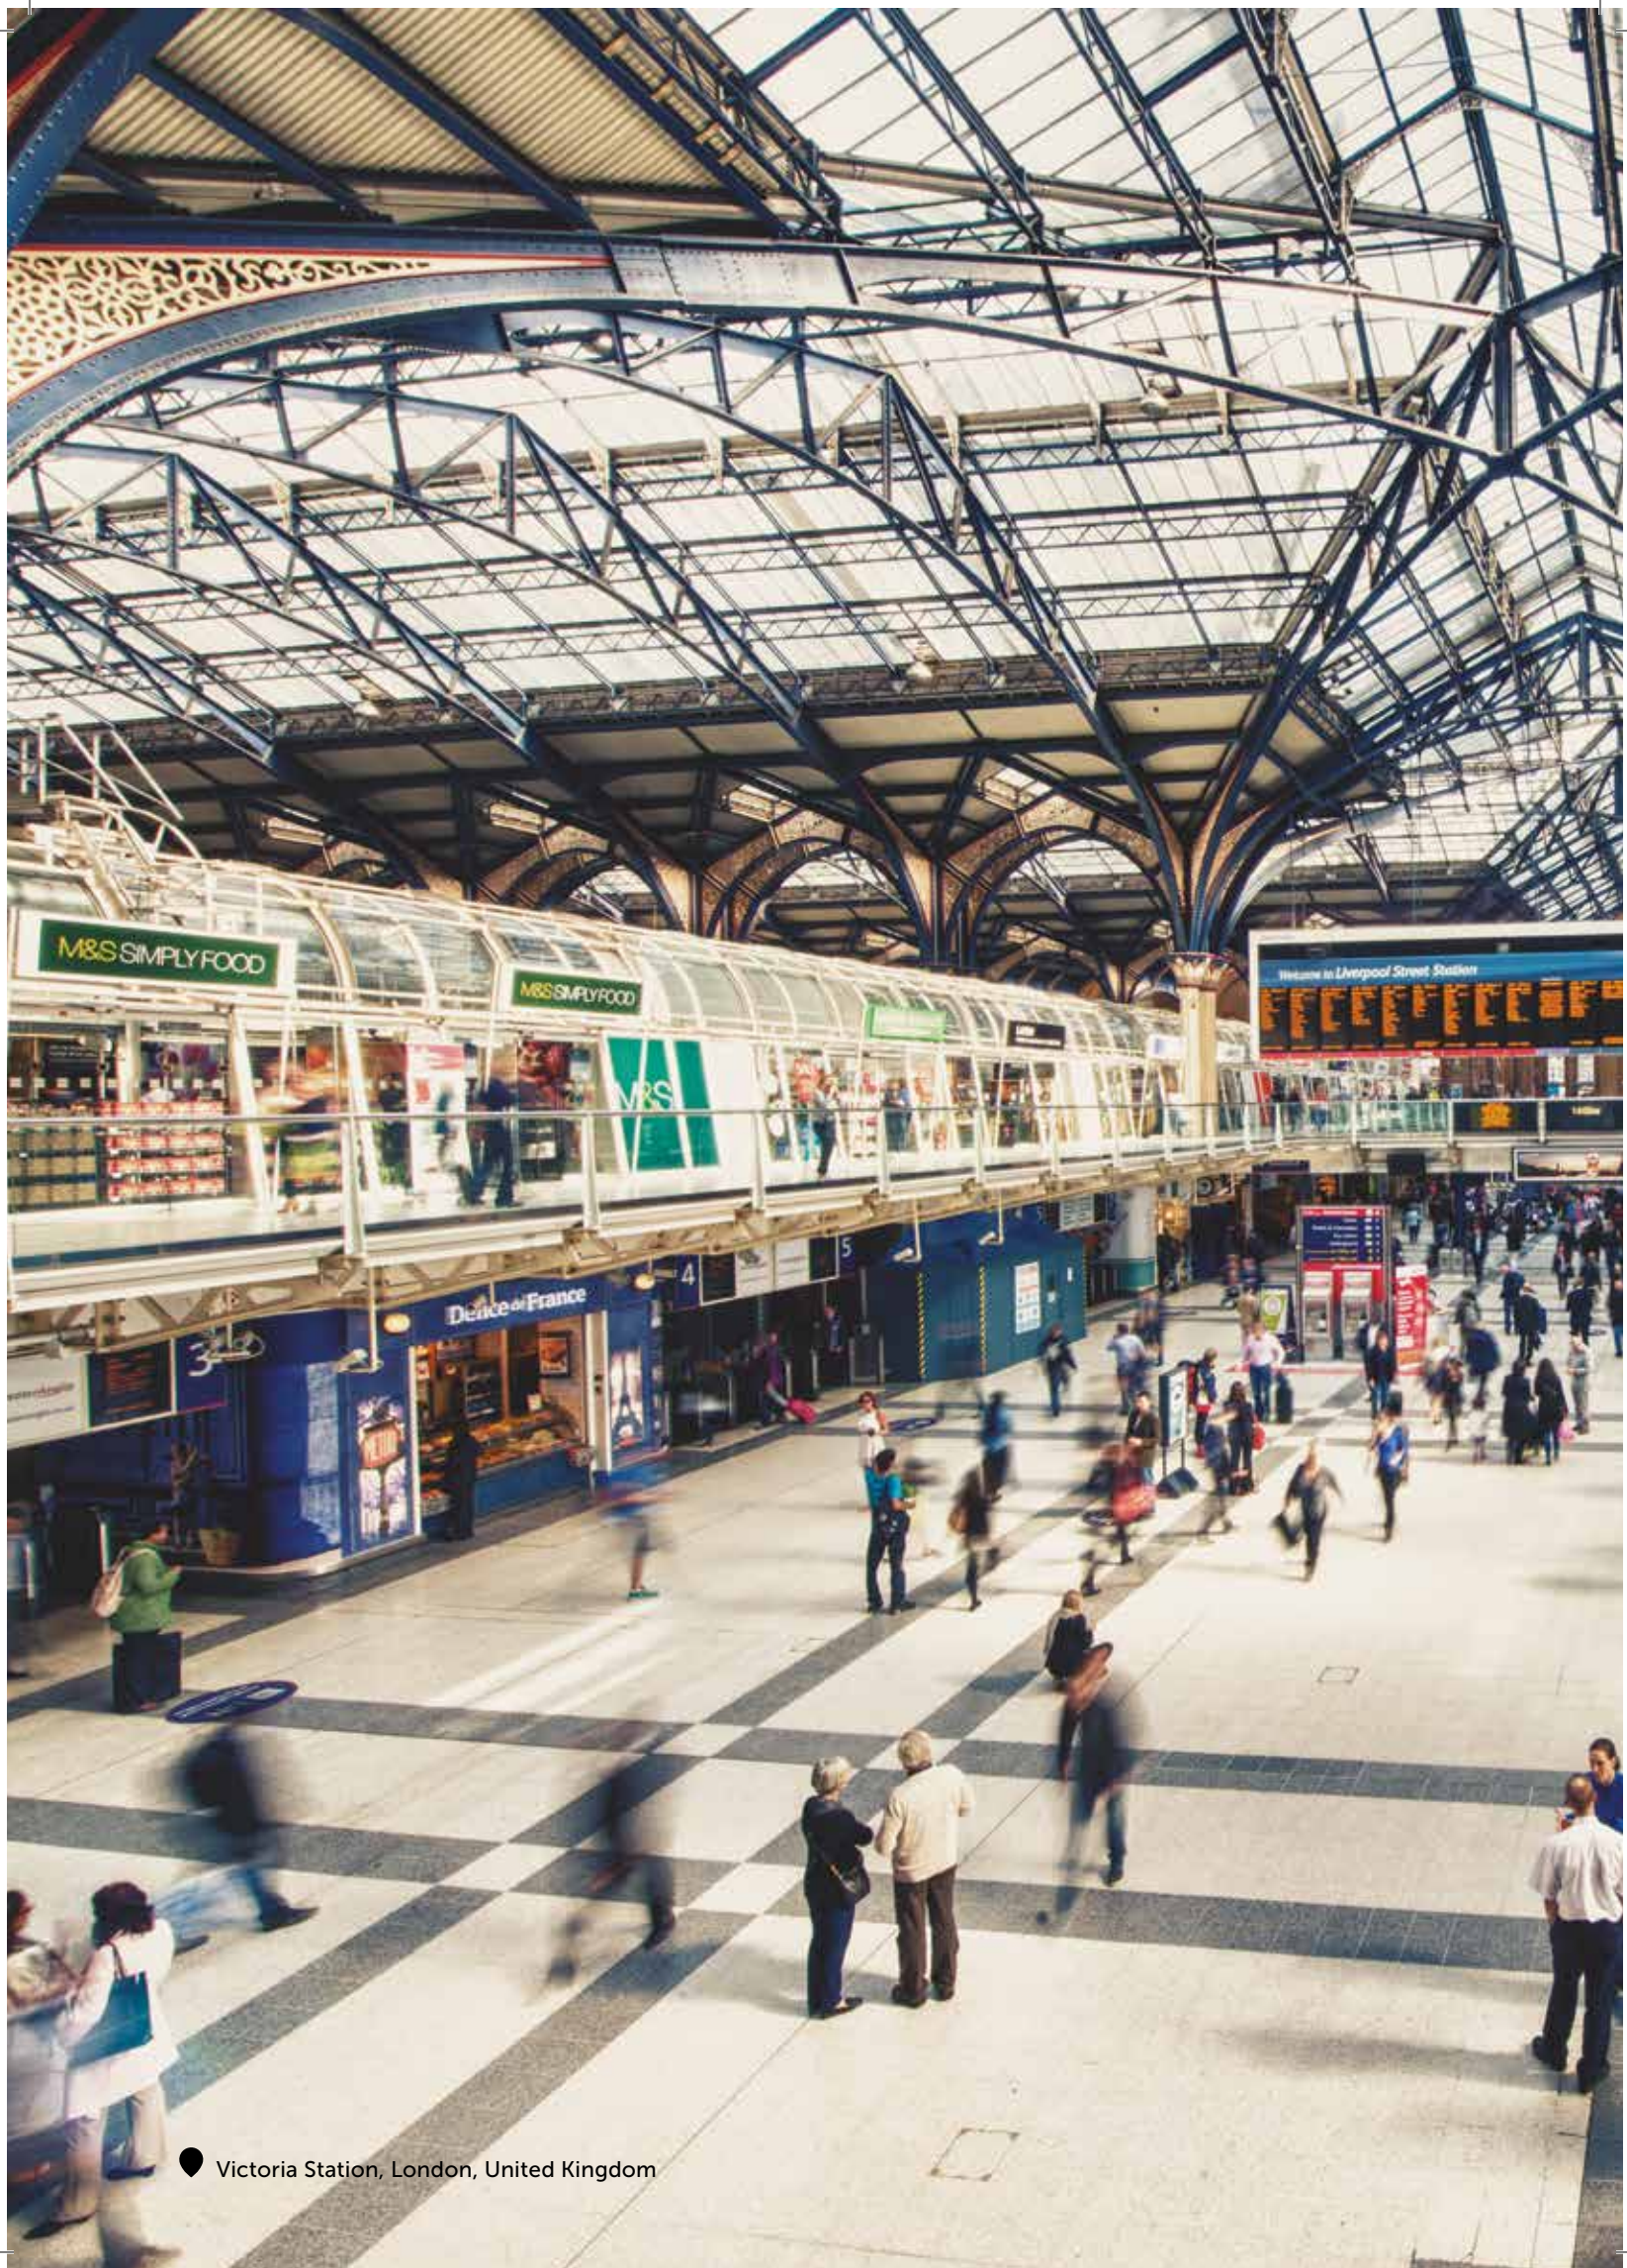

● Victoria Station, London, United Kingdom

NEW
GENERATION
HAND DRYERS

GREEN-SUSTAINABLE
HIGH TRAFFIC
HIGH SPEED
ENERGY SAVINGS



10-15
seconds

dualflow® plus
machflow®
speedflow®

TRADITIONAL
HAND DRYERS

HIGH TRAFFIC
HIGH DURABILITY
LOW NOISE



20-29
seconds

saniflow®
mediflow®

TRADITIONAL
HAND DRYERS

MEDIUM / LOW TRAFFIC
LOW NOISE
MOST AFFORDABLE



30-40
seconds

optima
juniorplus
smartflow®

OUR HAND DRYER RANGE

Simply functional

About 50 years ago, the first revolution in public toilet facilities took place throughout the world, with the appearance of the first hot air hand dryers. A new system for hand drying appeared and, thanks to its many advantages compared with other hand drying methods at that time, it slowly became more popular and familiar. Nowadays, you rarely see a public toilet without a hand dryer.

Now we can talk about a second wave of hand dryer innovation. The hot air hand dryer concept evolved and a new concept was born: the high speed, energy efficient, hand dryer.

Thus, the traditional hot air hand dryers were complemented by a new line of hand dryers that achieved drastically reduced drying times, operational costs and CO₂ emissions to the atmosphere. For this reason, we also call them eco-fast hand dryers.

THE ADVANTAGE OF HIGH SPEED

High speed dryers have become the market benchmark for hand drying solutions. With faster drying than traditional models, these machines achieve a high level of user satisfaction. They are extremely efficient as regards energy consumption, achieve a

significant reduction in operational costs, improve the sustainability performance of the building and reduce CO₂ emission levels to the atmosphere.

THE ADVANTAGES OF TRADITIONAL MACHINES

Traditional hand dryers (hot air hand dryers) are the perfect option for locations where a low noise level is required, such as libraries, theatres, cinemas, etc. and also in places where there may be vandalism. In the last case, the robustness and durability of these dryers is ideal.

These hand dryers continue to be, therefore, a good solution in many cases, so Mediclinics also offers one of the best ranges of this type of hand dryer on the market.

OUR RANGE

Currently, Mediclinics, as a result of its continuous innovation, has 3 hand dryer ranges divided into 8 families. These are available in different finishes and performance levels, which means we offer a wide range of solutions for hand drying, whether from a more traditional perspective or through an eco-fast perspective.



ECO-FAST RANGE

Faster, safer, cleaner and more environmentally friendly
HAND DRYERS.

The hand dryers from the Mediclinics eco-fast range are very energy efficient, as their electrical power consumption is very low. They are also very environmentally friendly, as their CO₂ emission levels to the atmosphere are very low and they are manufactured from 100% recyclable materials.

The cutting-edge technology applied to this line of eco-fast hand dryers makes them unique in the market. The main advantages of these hand dryers are:

- Reduction in drying time (between 8 and 15 seconds).
- Drying 3 times faster than traditional models, thus reducing waiting times and increasing traffic flow.
- Low energy consumption.
- CO₂ emission levels to the atmosphere among the lowest on the market.

- Reduced noise pollution levels compared to competitors' models.
- Reduction in energy consumption varies between 80 and 90%, compared to other traditional dryers.

"BLUE ANGEL": THE GREEN SOLUTION

"Blue Angel" certification is an environmental label awarded by the German Federal Government for the protection of people and the environment.

The main aims of this eco-label are: climate protection, the reduction of energy consumption and to prevent the emission of polluting agents and waste.

The Blue Angel eco-label for our hand dryers certifies that:

- Consume little energy
- Obtain high drying indices in a short time
- Are robust, safe and are designed with recyclable materials
- Do not contain materials that could damage the environment or people



ENERGY SAVINGS

The new technologies applied to these hand dryers mean that they consume much less.



ULTRA-FAST DRYING TIME

The usual drying time of conventional machines is over 30 seconds, so the DUALFLOW PLUS, MACHFLOW and SPEEDFLOW families are four times faster (8-15 seconds). They are unquestionably some of the fastest hand dryers on the market.

CARING FOR THE ENVIRONMENT

The CO₂ emission level of a traditional hand dryer is approximately 4.5 g CO₂/drying cycle (*). The CO₂ emission levels of a Dualflow Plus, Machflow or a Speedflow is approximately 0.8 g CO₂/drying cycle (*). They are surely the lowest CO₂ emission levels on the market.

MINIMUM NOISE POLLUTION

It is estimated that the noise from a conventional hand dryer is approximately 90 dBA, so the **DUALFLOW PLUS**, **MACHFLOW** and **SPEEDFLOW** families would be between 15% and 30% below this level. They are undoubtedly the lowest noise levels on the market.


(*) Data calculated considering average emissions (g CO₂/kWh) of each one of the electricity production technologies in Spain during 2015 and also the specific weight in % of each one on the total generation of electrical power.



DUALFLOW PLUS

A new generation hand dryer, fast, powerful, efficient and with an elegant design

- Ultra-fast drying speed (8-15 seconds)
- Low energy consumption (1.8 - 4.2 W/h per drying cycle)
- Very low CO₂ emissions level
- Very low noise level in its category (62-72 dBA)
- Adjustable motor speed with a potentiometer (19,000-30,000 rpm)
- Air filtration with a HEPA filter (filters 99.95% of 0.3 micron particles)
- Removable water tank for cleaning and disinfection
- Optionally it can be connected directly to the waste pipe
- BioCote, inhibits the growth of bacteria that cause bad smells and stains
- Switch for turning the heating element on and off easily
- Easy maintenance and ADA compliant



DUALFLOW PLUS

a handdryer for a new generation

Dualflow Plus M14 is probably the most eco friendly "hands-in" type of dryer on the market. Stylish designed for safe, fast and economical use in all washrooms with high or low volume traffic. Dualflow plus offers great features at a competitive price.



BIOCOTE

Antimicrobial technology is embedded to protect surfaces on the dryer in contact with the water



4 Air nozzles

For fastest hand drying



Luminous frontal leds

For a quick diagnosis of the hand dryer status

*dries hands
in 10-15
seconds*



3 most popular finishes

In white (M14A), satin (M14ACS) or black (M14AB)




Water from hands is collected

No hazardous water waste on the floor



Variable speed

Energy consumption, noise level and drying time are adjustable



Heating element

For maximum comfort



Drainpipe connection

First hand dryer directly connected to the drainpipe (Optional)



On/Off switch for heating element

Option to turn on/off the heating element



H13 HEPA filter

To prevent growth of a wide of microorganism circulating in the air



Air-freshener tablet

For a clean and fresh washroom (Optional)



Removable water tank

With external valve for easy emptying



Over **73%** saving
in energy consumption
compared to equivalent dryers

COMPARATIVE CONSUMPTION - SAVING dualflow plus vs similar "Hands-in" hand dryers from other brands

| | Wattage | Consumption €/Minute* | Consumption €/Hour* | Economical saving Dualflow® Plus vs competitors % |
|----------------------|---------|--------------------------|------------------------|---|
| Other U-shape dryer | 1600 | 0.004 | 0.251 | 73.71 % |
| Asian "hands-in" | 1750 | 0.005 | 0.274 | 75.71 % |
| Dualflow® plus dryer | 420 | 0.001 | 0.066 | |


*Calculation basis 0.156674 eur/Kwh (VAT and taxes not included)

HYGIENE

Biocote® Antimicrobial Technology


The Dualflow Plus incorporates BioCote® technology in additive form. This additive is incorporated at the time of manufacture of the machine's components that are in direct contact with the water and provides continuous antimicrobial protection.

The active ingredient on the surface of a material treated with a BioCote® additive attaches to the microbes that come into direct contact with the machine's surface, it then attacks and inhibits their reproductive function. On not being able to reproduce, the microbes gradually die off and disappear from the surface of the hand dryer.

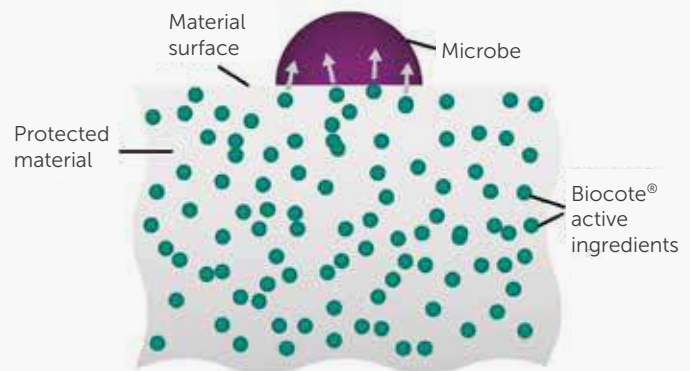

Biocote® Antimicrobial Protection:

- Removes 80% of microbes in 15 minutes
- Removes 99.9% of microbes in 2 hours
- Remains active until the end of the useful life of the product
- It is effective against bacteria, fungi and some viruses
- It acts continuously and relentlessly.

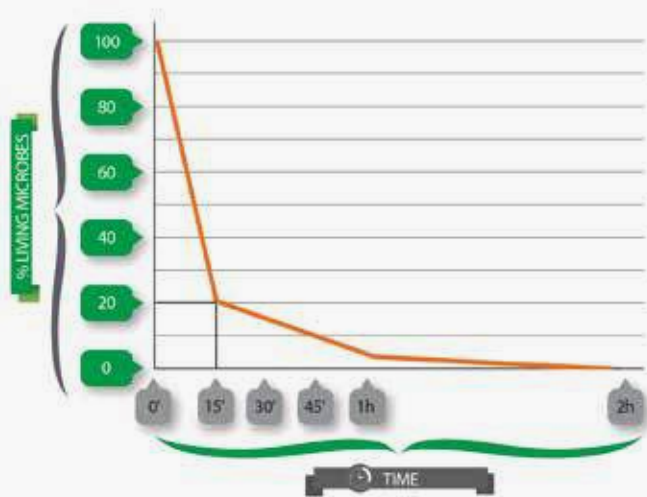

The level of microbes on a BioCote® protected surface is reduced up to 99.5% in two hours, compared to an untreated one. BioCote® technology starts to have an effect after just 15 minutes.



NOTE: BioCote® technology does not protect users or others against disease causing bacteria, germs, viruses or other harmful organisms. This technology is not a substitute for good hygiene and/or cleaning practises.

HEPA H13 Filter

The Dualflow Plus incorporates a HEPA 13 filter as standard that filters solid particles in suspension in the air, which significantly improves its quality. HEPA stands for "High Efficiency Particle Arrestance". It is a high-capacity filter that can trap a very high number of micro-particles such as pollen, dust mites and tobacco smoke.

The HEPA filter removes more than 99.95% of particles larger than 0.3 microns in size (particles approximately 300 times smaller than the diameter of a human hair)

The HEPA 13 filter, in accordance with standard EN 1822:2009, has the following characteristics:

- Blocks 99.95% of 0.3 µm particles
- Blocks smells (carbon filter)
- 100% resistant to moisture
- Maximum working temperature 70°C
- Cannot be washed



HAND DRYERS dualflow® plus

sensor operated



M14A

material: ABS
finish: white

ALSO AVAILABLE IN BLUE ANGEL VERSION



M14AB

material: ABS
finish: black

ALSO AVAILABLE IN BLUE ANGEL VERSION



M14ACS


material: ABS
finish: satin

ALSO AVAILABLE IN BLUE ANGEL VERSION


M14A · M14AB · M14ACS COMPONENTS AND MATERIALS

- High speed Class F universal brush motor.
- ABS cover
- Motor power adjustable, allowing electricity consumption to be regulated
- Minimum Heating element (only 400W) with switch "on/off" option
- IR sensors in both sides for automatic hands detection
- H13 HEPA filte, efficient to MPPS* > 99,95%, penetration at the MPPS* of 0,05%. Humidity resistance 100%
- Inner tank to collect the water. Removable water tank, with external valve for easy emptying
- Acoustic and optical warning of full water tank
- Frontal leds showing the status of the hand dryer
- Proven antimicrobial and antibacterial protection using silver ion technology from Biocote®, resisting the growth of microbes e.g. bacteria and moulds, complementing the cleaning routines
- An optional odor neutralizer for a cleaner and more pleasant atmosphere in the bathroom is available (Ref. RC POM 14)

*MPPS: Most penetrating particle size



Optionally, and by means of a kit for the connection to the waste pipe, code KITDESM14A, the dualflow® plus can be connected directly to the waste pipe. Thus the emptying of the water tank is eliminated because the water always goes directly to the waste pipe

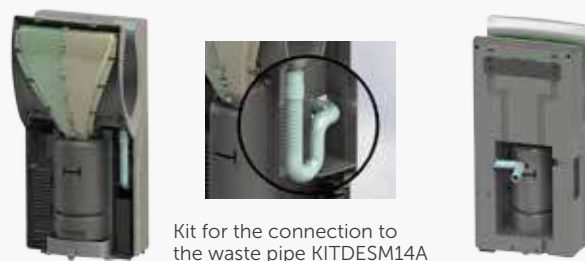


Kit for the connection to the waste pipe KITDESM14A

M14A · M14AB · M14ACS TECHNICAL SPECIFICATIONS

| | |
|-----------------------|----------------------------|
| Voltage | 220- 240V |
| Frequency | 50/60Hz |
| Electrical Isolation | Class I |
| Total power | 420 – 1,500W |
| Consumption | 3.2 – 6.4A |
| Motor power | 420 – 1,100W |
| Rpm | 19,000 – 30,000 |
| Heating element power | 0W or 400W (on/off switch) |




| | |
|---------------------------------------|---------------|
| Weight | 8.3Kg |
| Cover thickness | 3mm |
| Drying time | 8-15sec |
| Air velocity | 234 – 410Km/h |
| Air temperature (10 cm distance/21°C) | 40°C |
| Sound pressure (at 2m) | 62 – 72dBA |
| Protection rating | IPX4 |



MACHFLOW

Technology, robustness, compact design and quality at the service of hand drying

- Ultra-fast drying speed (8-15 seconds)
- Low energy consumption (1.8-4.2 W/h per drying cycle)
- Very low CO₂ emissions level to the atmosphere
- Low noise pollution (67-74dBA)
- Adjustable high speed motor (19,000-30,000 rpm)
- Switch for turning the heating element on and off easily
- Easy maintenance
- Fast install/uninstall technology to the wall (optional).
- Solid and compact



MACHFLOW

pure strenght

Fast, tough, smart and most energy efficient eco high-speed hand dryer fully adjustable to individual needs. Designer for saving money and time in hand drying.

*dries hands
in 10-15
seconds*



Air-freshener tablet.
For a clean and fresh bathroom
(Optional)



Heating element
For a maximum comfort



Silentblocks
In the base plate to cushion
mechanical vibrations



**On/Off switch for the
heating element**
Option to turn on/off the
heating element



**The machflow® Plug-in
technology** is an easy, practical,
fast and secure system to install
and uninstall the hand dryer
(optional)



Variable speed.
Energy consumption, noise
level and drying time are
adjustable



Hands distance detection
Electronic infrared detection sensor
adjustable by means of a
potentiometer



**available
in four
finishes**



White



Black



Bright



Satin

HAND DRYERS *machflow®* sensor operated



M09A

material: **steel**
finish: **white epoxy**

ALSO AVAILABLE IN BLUE ANGEL VERSION



M09AB

material: **steel**
finish: **matte black epoxy**


ALSO AVAILABLE IN BLUE ANGEL VERSION

M09A · M09AB COMPONENTS AND MATERIALS

- Maximum air velocity: 325 Km/h
- One-piece weld-free cover
- The base includes silent-blocks to cushion mechanical vibrations
- Class F high pressure universal brush motor
- Motor power is adjustable, allowing electricity consumption to be regulated
- PA6 V0 internal set
- Disconnects automatically after 60 seconds of continuous use
- Minimum Heating element (only 400W) with switch "on/off" option
- Fast install/uninstall technology to the wall (optional). Plug-in system
- Electronic infrared detection sensor Detection distance adjustable by potentiometer (5 - 25 cm)
- An optional odor neutralizer for a cleaner and more pleasant atmosphere is available (Ref. RCPOM14)

M09A · M09AB TECHNICAL SPECIFICATIONS

| | |
|---|--------------------------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Total power | 420 - 1,500 W |
| Consumption | 3.2 - 6.4 A |
| Motor power | 420 - 1,100 W |
| r.p.m. | 19,000 - 30,000 |
| Heating element power | 0 W or 400 W (on / off switch) |
| Weight | 5.1 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 8 - 15 sec |
| Air velocity | 191 - 325 Km/h |
| Air temperature (10 cm distance / 21°C) | 45°C |
| Sound pressure (at 2m) | 67 - 74 dBA |
| Protection rating | IP23 |

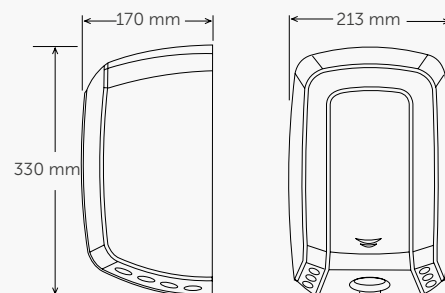

HAND DRYERS machflow® sensor operated



M09AC

material: AISI 304 stainless steel
finish: **bright**

325 km/h

NEW FEATURES

ALSO AVAILABLE IN BLUE ANGEL VERSION



M09ACS

material: AISI 304 stainless steel
finish: **satin**

325 km/h

NEW FEATURES


ALSO AVAILABLE IN BLUE ANGEL VERSION

M09AC · M09ACS COMPONENTS AND MATERIALS

- Maximum air velocity: 325 Km/h
- One-piece weld-free cover
- The base includes silent-blocks to cushion mechanical vibrations
- Class F high pressure universal brush motor
- Motor power is adjustable, allowing electricity consumption to be regulated
- PA6 V0 internal set
- Disconnects automatically after 60 seconds of continuous use
- Minimum Heating element (only 400W) with switch "on/off" option
- Fast install/uninstall technology to the wall (optional). Plug-in system
- Electronic infrared detection sensor Detection distance adjustable by potentiometer (5 - 25 cm)
- An optional odor neutralizer for a cleaner and more pleasant atmosphere is available (Ref. RCPOM14)

M09AC · M09ACS TECHNICAL SPECIFICATIONS

| | |
|---|--------------------------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Total power | 420 - 1,500 W |
| Consumption | 3.2 - 6.4 A |
| Motor power | 420 - 1,100 W |
| r.p.m. | 19,000 - 30,000 |
| Heating element power | 0 W or 400 W (on / off switch) |
| Weight | 5.1 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 8 - 15 sec |
| Air velocity | 191 - 325 Km/h |
| Air temperature (10 cm distance / 21°C) | 45°C |
| Sound pressure (at 2m) | 67 - 74 dBA |
| Protection rating | IP23 |

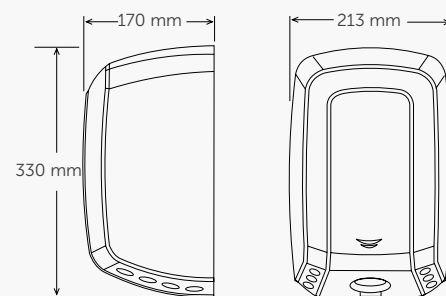





HAND DRYERS machflow® recessed kit

KT009
recessed kit

material: **steel**
finish: **white epoxy**

dryer not included

NEW

KT009CS
recessed kit


material: **AISI 304 stainless steel**
finish: **satin**

dryer not included






- The American with Disabilities Act (ADA) defines the accessible requirements for the design of washroom spaces in the USA
- In chapter 3: "Protruding objects", point 307.2 "Protrusion limits" ADA says: objects above the finish floor or ground shall protrude 100 mm maximum horizontally into the circulation path.
- The Speedflow has been designed to fully comply with these recommendations.

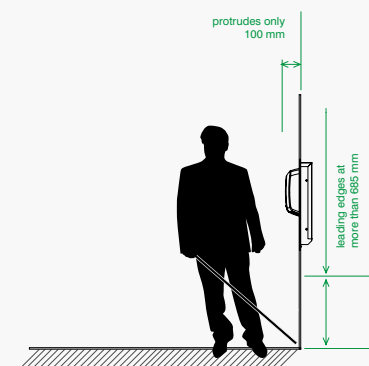


Wall box is fabricated of two welded parts. The dryer mounting areas is fabricated of 1 mm 18-8 type AISI 304 stainless steel, it includes 4 M5 bolts welded on top of the base plate for fitting of the machflow® hand dryer. The frame is fabricated of 0,7 mm 18-8 type AISI 304 stainless steel with 4 screw holes of Ø6,5 mm for mounting on the wall.


Nuts and bolts for the fitting of the hand dryer to the kit included: 4 nuts DIN 934 M5, 4 washers DIN 9021 M5 and 4 rubber silent blocks 8 x 18 mm.

NOTE: the screws and wall plugs for the mounting of the cabinet to the wall are not included. The use of stainless steel screws is recommended.

Weight: 3 Kg (6,6 lbs) without machflow® hand dryer.

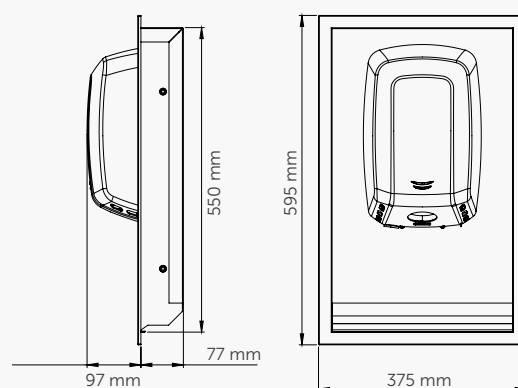

HAND DRYERS machflow® plug-in kit

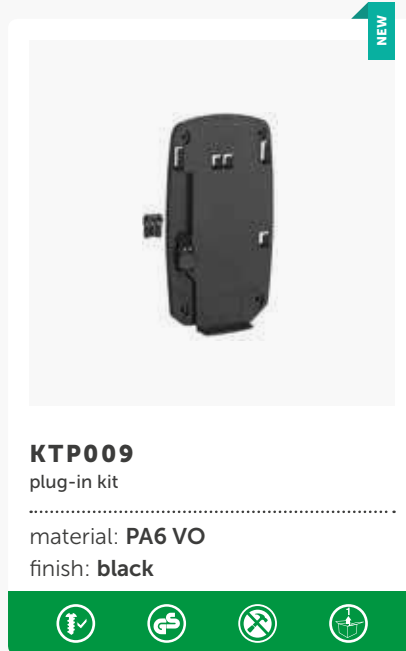

The machflow® Plug-in technology is an easy, practical, fast and secure system to install and uninstall a hand dryer, making maintenance much more efficient and reducing at the same time its costs.

With the machflow® Plug-in technology a hand dryer can be installed in only three main steps, it can be replaced in less than 10 seconds thanks to its SMED (Single-Minute Exchange of Die) system, its maintenance can be carried out better at the maintenance workshop and it is totally secure against electric shocks. All of these benefits allow you to reduce the maintenance costs.

Benefits of the Plug-in system



- The machflow® Plug-in technology makes the hand dryer installation easier. With this technology it is only needed three main steps to carry it out, as follows:

Step 1.

Wall
base plate
fixation



Step 2.

Assembly
of the
safety
socket



Step 3.

Hand dryer
installation
to the wall




- Ready to work 24/7 with the machflow® Plug-in technology. The replacement of the hand dryer for maintenance purposes is straightforward (the hand dryer can be replaced in less than 10 seconds thanks to its SMED system) and it is not necessary to be carried out by a qualified technician (the plug and the socket used by the machflow® Plug-in technology are totally electrical isolated).
- Reduction of the maintenance costs thanks to: easy installation of the hand dryer, its quick replacement and the possibility to carry out maintenance operations at the maintenance workshop.
- Secure against electric shocks with the machflow® Plug-in technology. Electrical connections are much more secure with the machflow® Plug-in technology than the traditional electrical connection systems, because it avoids the risk of users accidentally touching energized conductors and thereby experiencing electric shock.



SPEEDFLOW

Versatile design, durable, modern and elegant

- Fast drying time (10-12 seconds)
- Very low energy consumption (0.5 - 3.2 W/h) per drying cycle
- Adjustable high speed motor (8,500-11,200 rpm)
- Universal voltage (110 - 240 V)
- Heating element turned off by means of a jumper.
- Meets ADA regulations (projects just 100 mm from the wall)
- Vandal proof



SPEEDFLOW

high-speed elegance

This especially stylish dryer is highly powerful despite its unique flat design.



Heating element
For maximum comfort



Global Universal voltage
Accepts 110-120/208/
220-240 VAC input



Silentblocks
In the base plate to cushion
mechanical vibrations



**ON / OFF jumper for
heating element**
Option to turn on/off the
heating element



Hands distance detection
Electronic infrared detection
sensor adjustable by means
of a potentiometer



Ultraflat design
Protrudes only 10cm
from the wall



Variable speed
Energy consumption, noise level and
drying time are adjustable

**available
in four
finishes**



White



Black



Bright



Satin

HAND DRYERS speedflow®

sensor operated




M06A

material: **steel**
finish: **white epoxy**



M06AB

material: **steel**
finish: **matte black epoxy**



- The American with Dissabilities Act (ADA) defines the accessible requirements for the design of washroom spaces in the USA
- In chapter 3: "Protruding objects", point 307.2 "Protrusion limits" ADA says: objects above the finish floor or ground shall protrude 100 mm maximum horizontally into the circulation path.
- The Speedflow has been designed to fully comply with these recommendations.


M06A · M06AB COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two safety screws and lock with special speedflow® key
- Aluminium base. Includes silent-blocks to damp mechanical vibrations
- Fire resistant plastic fan scroll
- High-speed motor with safety thermal cut-off
- Aluminium centrifugal double asymmetrical inlet fan wheel
- Speed motor adjustable by means of a potentiometer
- Disconnection of the heating element (H.E) by means of a jumper
- Disconnects automatically after 60 seconds of continuous use
- Electronic infrared detection sensor. Adjustable detection by potentiometer (5 - 25 cm)
- Ultra-flat: 10 cm deep (complies with ADA regulations)
- The electronic control unit detects whether the motor brushes have worn out, turning off the hand dryer as an additional safety measure
- Universal voltage

M06A · M06AB TECHNICAL SPECIFICATIONS

| | |
|-------------------------------|-----------------------------|
| Voltage | 100-120 V, 208 V, 220-240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Total power (heating el. ON) | 1,010 W - 1,150 W |
| Total power (heating el. OFF) | 110 - 250 W |
| Consumption | 1.3-5 A (230 V) |
| Motor power | 110 - 250 W |
| r.p.m. | 8,500 - 11,200 |

| | |
|-----------------------------------|---------------------------|
| Heating element power | 0 or 900W (on/off jumper) |
| Weight | 3.8 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 10 - 12 sec |
| Air velocity | 120 - 180 Km |
| Air temp. (10 cm distance / 21°C) | 42 °C |
| Sound pressure (at 2 m) | 58 - 67 dBA |
| Protection rating | IP23 |

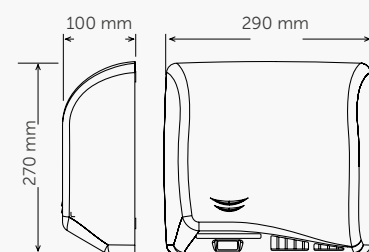

HAND DRYERS speedflow®

sensor operated




M06AC

material: **AISI 304 stainless steel**
finish: **bright**



M06ACS

material: **AISI 304 stainless steel**
finish: **satin**



- The American with Dissabilities Act (ADA) defines the accessible requirements for the design of washroom spaces in the USA
- In chapter 3: "Protruding objects", point 307.2 "Protrusion limits" ADA says: objects above the finish floor or ground shall protrude 100 mm maximum horizontally into the circulation path.
- The Speedflow has been designed to fully comply with these recommendations.


M06AC · M06ACS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two safety screws and lock with special speedflow® key
- Aluminium base. Includes silent-blocks to damp mechanical vibrations
- Fire resistant plastic fan scroll
- High-speed motor with safety thermal cut-off
- Aluminium centrifugal double asymmetrical inlet fan wheel
- Speed motor adjustable by means of a potentiometer
- Disconnection of the heating element (H.E) by means of a jumper
- Disconnects automatically after 60 seconds of continuous use
- Electronic infrared detection sensor. Adjustable detection by potentiometer (5 - 25 cm)
- Ultra-flat: 10 cm deep (complies with ADA regulations)
- The electronic control unit detects whether the motor brushes have worn out, turning off the hand dryer as an additional safety measure
- Universal voltage

M06AC · M06ACS TECHNICAL SPECIFICATIONS

| | |
|-------------------------------|-----------------------------|
| Voltage | 100-120 V, 208 V, 220-240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Total power (heating el. ON) | 1,010 W - 1,150 W |
| Total power (heating el. OFF) | 110 - 250 W |
| Consumption | 1.3-5 A (230 V) |
| Motor power | 110 - 250 W |
| r.p.m. | 8,500 - 11,200 |

| | |
|-----------------------------------|---------------------------|
| Heating element power | 0 or 900W (on/off jumper) |
| Weight | 3.8 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 10 - 12 sec |
| Air velocity | 120 - 180 Km |
| Air temp. (10 cm distance / 21°C) | 42 °C |
| Sound pressure (at 2 m) | 58 - 67 dBA |
| Protection rating | IP23 |

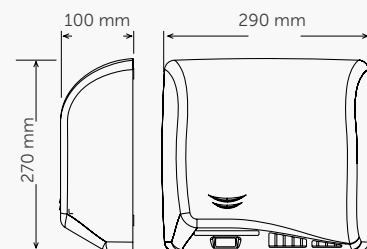

HIGH TRAFFIC RANGE

Reliable, durable, vandal proof, safe and quality HAND DRYERS

Saniflow® and Mediflow® are the two hand dryer families from the Mediclinics high traffic range. They are characterised by an easy maintenance design, by their vandal proof features, by their robustness, but, above all, by their great reliability. These hand dryers were conceived to offer excellent performance over many years in very high traffic areas, such as airports, sports stadiums, shopping centres, sports centres, etc.

Due to their low noise level during operation, these hand dryers are also ideal for installation in places where quiet is important, such as museums, libraries, cinemas, theatres, etc.





The main advantages of these hand dryers are:

- High speed and long lasting motors that provide a stable and constant air flow that guarantees full drying of the hands in a few seconds.
- Adjustable detection distance, in all the automatic models of the range, in order to obtain the optimal hand detection distance depending on the available light.
- Built-in safety systems, such as thermal cut-off in the motors and in the heating elements, automatic cut-out system and vandal proof security screws that prevent accidents such as fire, electrocution, trapping, etc.
- Option to use a wall recess kit, with a frame manufactured in the same finish as the installed dryer, in order to comply with the ADA and UNE standards for the elimination of architectural barriers, which limit the horizontal projection of hand dryers to 100 mm, thus facilitating access for those with reduced mobility..

SANIFLOW

A classic, robust and reliable design for the 21st century.

- High speed and long lasting motors that provide a stable and constant air flow that guarantees full drying of the hands in a few seconds.
- Robust, reliable and high quality hand dryer
- One of the most powerful air flows on the market, within its class of machine
- The heating element and the motor have built-in safety thermal cut-off
- Chromed 360° rotating nozzle
- Manual or automatic operating options
- Vandal proof
- Easy cleaning and maintenance



HAND DRYERS saniflow® push-button



E05

material: **steel**
finish: **white epoxy**



E05B

material: **steel**
finish: **matte black epoxy**



E05C

material: **AISI 304 stainless steel**
finish: **bright**



E05CS

material: **AISI 304 stainless steel**
finish: **satin**




E05 · E05B · E05C · E05CS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
- 3 mm thick aluminium base
- Fire resistant plastic fan scroll
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double symmetrical inlet fan wheel
- The heating element includes a safety thermal cut-off
- 360° revolving nozzle in chrome-plated zamak
- Chrome-plated zamak button activates an electronic timer with a 35-second cycle
- Four silent-blocks to minimise vibrations and noise

E05 · E05B · E05C · E05CS TECHNICAL SPECIFICATIONS

| | |
|---|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Total power | 2,250 W |
| Consumption | 10 A |
| Motor power | 250 W |
| r.p.m. | 5,500 |
| Heating element power | 2,000 W |
| Weight | 4.65 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 29 sec |
| Air velocity | 100 Km/h |
| Air temperature (10 cm distance / 21°C) | 50°C |
| Sound pressure (at 2m) | 68 dBA |
| Protection rating | IP23 |

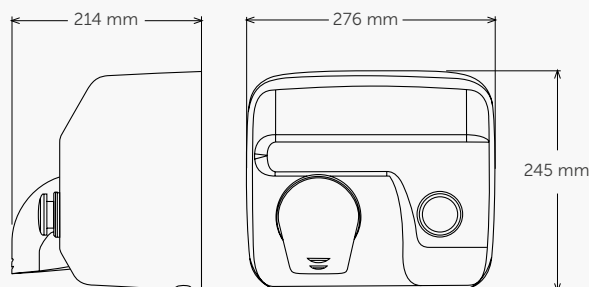

HAND DRYERS saniflow®

push-button / sensor operated



E85

material: **cast iron**
finish: **white enamelled coating**



E85A

material: **cast iron**
finish: **white enamelled coating**




E85 · E85A COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
 - 3 mm thick aluminium base
 - Fire resistant plastic fan scroll
 - Class F universal brush motor incorporating a safety thermal cut-off
 - Aluminium centrifugal double symmetrical inlet fan wheel
 - The heating element includes a safety thermal cut-off
 - Includes 4 silent-blocks to minimise vibrations and noise
 - 360° revolving nozzle in chrome-plated zamak
- E85**
- The chrome-plated zamak button activates an electro-mechanic timer with a 35-second cycle
- E85A**
- Electronic infrared detection sensor
 - Adjustable detection distance 15-25 cm


E85 · E85A TECHNICAL SPECIFICATIONS

| | |
|---|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Total power | 2,250 W |
| Consumption | 10 A |
| Motor power | 250 W |
| r.p.m. | 5,500 |
| Heating element power | 2,000 W |
| Weight | 11.5 Kg |
| Cover thickness | 6 mm |
| Drying time | 29 sec |
| Air velocity | 100 Km/h |
| Air temperature (10 cm distance / 21°C) | 50°C |
| Sound pressure (at 2m) | 68 dBA |
| Protection rating | IP23 |

E85

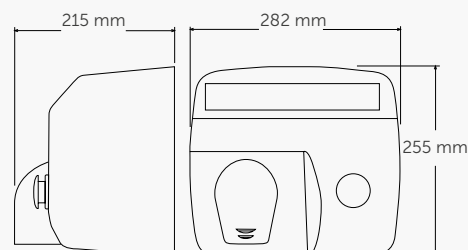

E85A

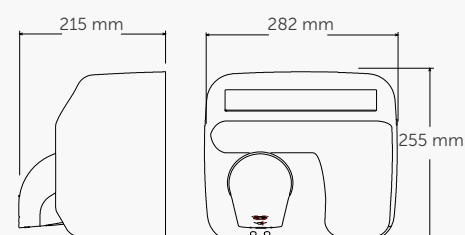

HAND DRYERS saniflow® push-button



E88

material: **steel**
finish: **white enamelled coating**



E88B

material: **steel**
finish: **black enamelled coating**



E88C

material: **steel**
finish: **bright chrome**



E88CS

material: **steel**
finish: **satin chrome**




E88 · E88B · E88C · E88CS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
- 3 mm thick aluminium base
- Fire resistant plastic fan scroll
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double symmetrical inlet fan wheel
- The heating element includes a safety thermal cut-off
- Includes 4 silent-blocks to minimise vibrations and noise
- 360° revolving nozzle
- The button activates an electro-mechanic timer with a 35-second cycle

E88 · E88B · E88C · E88CS TECHNICAL SPECIFICATIONS

| | |
|---|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Total power | 2,250 W |
| Consumption | 10 A |
| Motor power | 250 W |
| r.p.m. | 5,500 |
| Heating element power | 2,000 W |
| Weight | 5.9 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 29 sec |
| Air velocity | 100 Km/h |
| Air temperature (10 cm distance / 21°C) | 50°C |
| Sound pressure (at 2m) | 68 dBA |
| Protection rating | IP23 |

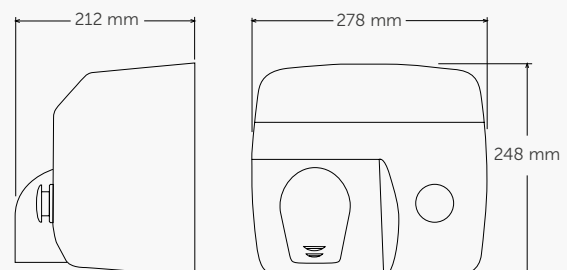

HAND DRYERS saniflow®
push-button / sensor operated



E880

material: **steel**
finish: **gold plated**



E88AO

material: **steel**
finish: **gold plated**




E880 · E88AO COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
 - 3 mm thick aluminium base
 - Fire resistant plastic fan scroll
 - Class F universal brush motor incorporating a safety thermal cut-off
 - Aluminium centrifugal double symmetrical inlet fan wheel
 - The heating element includes a safety thermal cut-off
 - Includes 4 silent-block to minimise vibrations and noise
 - 360° revolving nozzle
- E880**
- The button activates an electro-mechanic timer with a 35-second cycle
- E88AO**
- Electronic infrared detection sensor
 - Adjustable detection distance 15-25 cm

E880 · E88AO TECHNICAL SPECIFICATIONS

| | |
|---|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Total power | 2,250 W |
| Consumption | 10 A |
| Motor power | 250 W |
| r.p.m. | 5,500 |
| Heating element power | 2,000 W |
| Weight | 5.9 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 29 sec |
| Air velocity | 100 Km/h |
| Air temperature (10 cm distance / 21°C) | 50°C |
| Sound pressure (at 2m) | 68 dBA |
| Protection rating | IP23 |

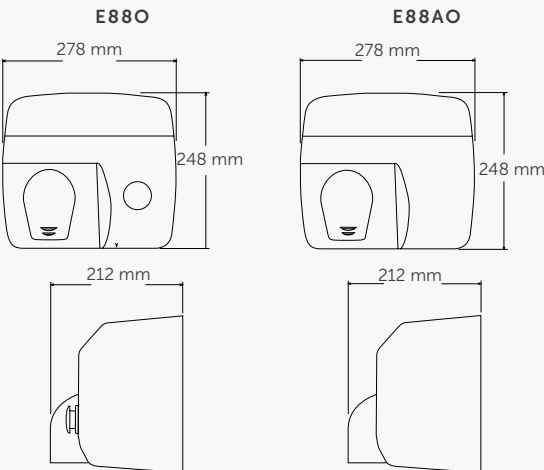

HAND DRYERS saniflow® sensor operated



E88A

material: **steel**
finish: **white enamelled coating**



E88AB

material: **steel**
finish: **black enamelled coating**



E88AC

material: **steel**
finish: **bright chrome**



E88ACS

material: **steel**
finish: **satin chrome**




E88A · E88AB · E88AC · E88ACS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
- 3 mm thick aluminium base
- Fire resistant plastic fan scroll
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double symmetrical inlet fan wheel
- The heating element includes a safety thermal cut-off
- 360° revolving nozzle in chrome-plated zamak
- Electronic infrared detection sensor
- Adjustable detection distance 15-25 cm
- Four silent-blocks to minimise vibrations and noise

E88A · E88AB · E88AC · E88ACS TECHNICAL SPECIFICATIONS

| | |
|---|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Total power | 2,250 W |
| Consumption | 10 A |
| Motor power | 250 W |
| r.p.m. | 5,500 |
| Heating element power | 2,000 W |
| Weight | 5.9 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 29 sec |
| Air velocity | 100 Km/h |
| Air temperature (10 cm distance / 21°C) | 50°C |
| Sound pressure (at 2m) | 68 dBA |
| Protection rating | IP23 |

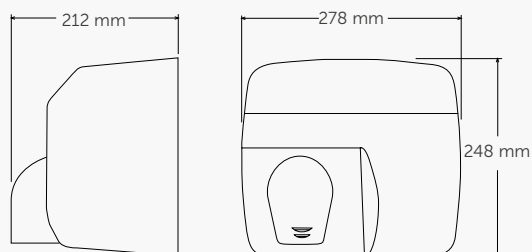

HAND DRYERS saniflow® sensor operated



E05A

material: **steel**
finish: **white epoxy**



E05AB

material: **steel**
finish: **matte black epoxy**



E05AC

material: **AISI 304 stainless steel**
finish: **bright**



E05ACS

material: **AISI 304 stainless steel**
finish: **satin**




E05A · E05AB · E05AC · E05ACS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow® key
- 3 mm thick aluminium base
- Fire resistant plastic fan scroll
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double symmetrical inlet fan wheel
- The heating element includes a safety thermal cut-off
- 360° revolving nozzle in chrome-plated zamak
- Electronic infrared detection sensor
- Adjustable detection distance 15-25 cm

E05A · E05AB · E05AC · E05ACS TECHNICAL SPECIFICATIONS

| | |
|---|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Total power | 2,250 W |
| Consumption | 10 A |
| Motor power | 250 W |
| r.p.m. | 5,500 |
| Heating element power | 2,000 W |
| Weight | 4.65 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 29 sec |
| Air velocity | 100 Km/h |
| Air temperature (10 cm distance / 21°C) | 50°C |
| Sound pressure (at 2m) | 68 dBA |
| Protection rating | IP23 |

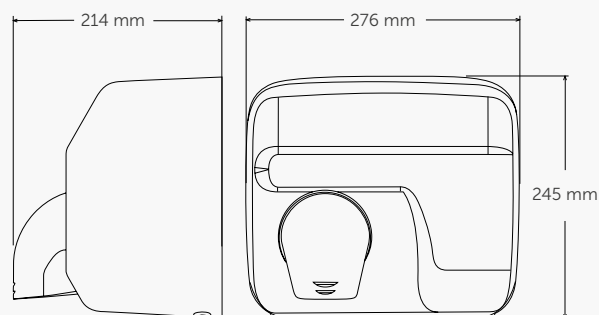

HAND DRYERS saniflow®

recessed kit for push-button operated models



dryer not included

KT0005

material: **steel**
finish: **white epoxy**



dryer not included

KT0005C

material: **AISI 304 stainless steel**
finish: **bright**



dryer not included

KT0005CS

material: **AISI 304 stainless steel**
finish: **satin**



KT0005 · KT0005C · KT0005CS COMPONENTS AND MATERIALS

- Electro-zincated iron cabinet for mounting the saniflow® dryer on the wall
- Grey rubber seal provides reinforced external protection that minimises vibrations and noise
- Nuts and bolts for assembling the dryer and fitting the frame to the wall are included


KT0005

- Steel frame

KT0005C · KT0005CS

- AISI 304 stainless steel frame

KT0005 · KT0005C · KT0005CS TECHNICAL SPECIFICATIONS

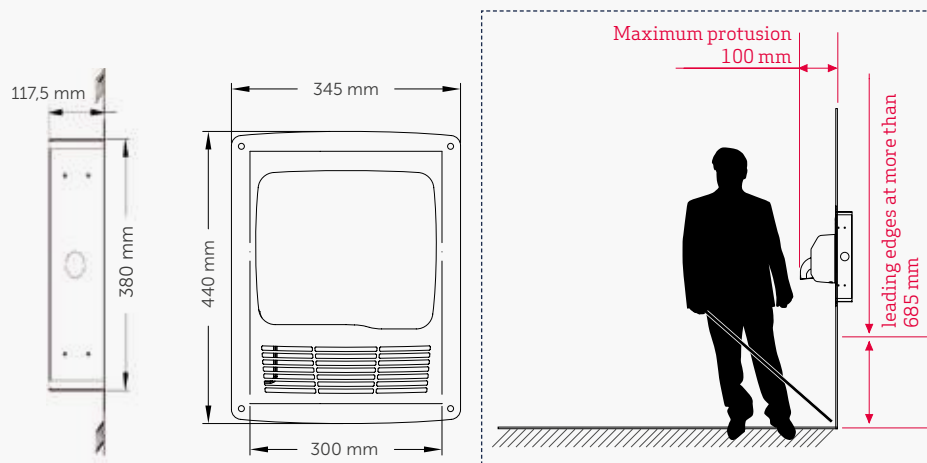

The hand dryer and wall mount kit protrude 90 mm horizontally in compliance with the American ADA standards that restrict the horizontal projection of devices installed in public washrooms to 100 mm.

MEDIFLOW

Intelligent, quiet and modern

- Powerful, robust and reliable hand dryer
- One of the quietest machines in its category (only 65 dBA)
- The heating element and the motor have built-in safety thermal cut-off
- "Logic Dry" intelligent system that adapts the outlet air flow temperature to the ambient temperature (M02 models)
- Automatic operation which prevents having to touch the machine
- Adjustable hand detection distance using a potentiometer
- Easy cleaning and maintenance



HAND DRYERS mediflow® intelligent

sensor operated



M02A

material: **steel**
finish: **white epoxy**



M02AB

material: **steel**
finish: **matte black epoxy**



M02AC

material: **AISI 304 stainless steel**
finish: **bright**



M02ACS

material: **AISI 304 stainless steel**
finish: **satin**




M02A · M02AB · M02AC · M02ACS COMPONENTS AND MATERIALS

- The cover is fixed to the base with two screws
- Base and fan scroll fire resistant plastic. Includes silent-blocks to prevent mechanical vibrations
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double asymmetrical inlet fan wheel
- Heating element incorporates a safety thermal cut-off
- Selective detection of fixed targets and system of automatic disconnection after 120 seconds of continuous use
- Electronic infrared detection sensor
- Adjustable detection distance by potentiometer 5 - 25 cm
- The technology **LogicDry** automatically regulates the temperature of the air output between four possible levels, depending on the room temperature, managing electricity consumption to offer significant energy savings

M02A · M02AB · M02AC · M02ACS TECHNICAL SPECIFICATIONS

| | |
|---|---------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class II |
| Total power | 250 - 2,750 W |
| Consumption | 1.2 - 12 A |
| Motor power | 250 W |
| r.p.m. | 4,500 |
| Heating element power | 0 - 2,500 W |
| Weight | 4.25 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 29 sec |
| Air velocity | 95 Km/h |
| Air temperature (10 cm distance / 21°C) | 50°C |
| Sound pressure (at 2m) | 65 dBA |
| Protection rating | IP23 |

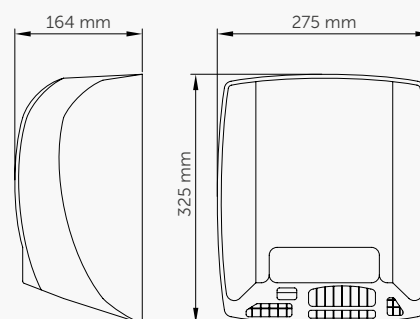

HAND DRYERS mediflow®

sensor operated



M03A

material: **steel**
finish: **white epoxy**



M03AB

material: **steel**
finish: **matte black epoxy**



M03AC

material: **AISI 304 stainless steel**
finish: **bright**



M03ACS

material: **AISI 304 stainless steel**
finish: **satin**




M03A · M03AB · M03AC · M03ACS COMPONENTS AND MATERIALS

- The cover is fixed to the base with two screws
- Base and fan scroll in fire resistant plastic. Includes silent-blocks to cushion mechanical vibrations
- Class F universal brush motor incorporating a safety thermal cut-off
- Aluminium centrifugal double asymmetrical inlet fan wheel
- Heating element incorporating an safety thermal cut-off
- Electronic infrared detection sensor
- Adjustable detection distance by potentiometer 5 - 25 cm

M03A · M03AB · M03AC · M03ACS TECHNICAL SPECIFICATIONS

| | |
|---|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class II |
| Total power | 2,750 W |
| Consumption | 12 A |
| Motor power | 250 W |
| r.p.m. | 4,500 |
| Heating element power | 2,500 W |
| Weight | 4.25 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 29 sec |
| Air velocity | 95 Km/h |
| Air temperature (10 cm distance / 21°C) | 50°C |
| Sound pressure (at 2m) | 65 dBA |
| Protection rating | IP23 |

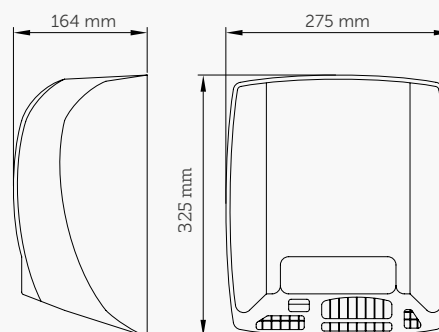

HAND DRYERS mediflow®

recessed kit



dryer not included

KT0010

material: **steel**
finish: **white epoxy**



dryer not included

KT0010C

material: **AISI 304 stainless steel**
finish: **bright**



dryer not included

KT0010CS

material: **AISI 304 stainless steel**
finish: **satın**



KT0010 · KT0010C · KT0010CS COMPONENTS AND MATERIALS

- Cabinet in electro-zinc coated iron for installing the mediflow® hand dryer
- Grey rubber seal provides reinforced external protection, minimising vibrations and noise
- Nuts and bolts for mounting the dryer and its frame on the wall included



KT0010

- Steel frame

KT0010C · KT0010CS

- AISI 304 stainless steel frame

KT0010 · KT0010C · KT0010CS TECHNICAL SPECIFICATIONS

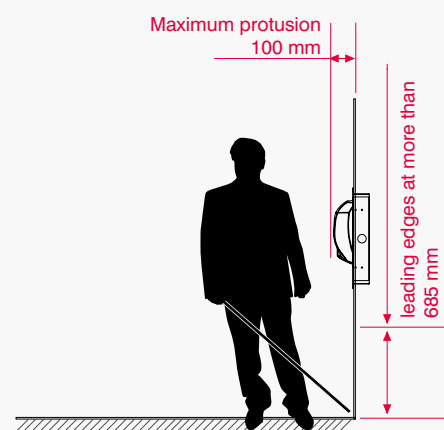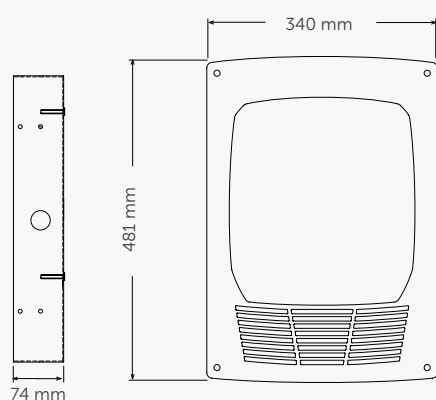

The hand dryer and wall mountign kit protrude 90 mm horizontally in compliance with the American ADA standards that restrict the horizontal projection of devices installed in public wahsrooms to 100 mm.





LOW / MEDIUM TRAFFIC RANGE

HAND DRYERS with an elegant design and a great quality-price ratio.

This range of hand dryers is made up of three families of machine: Optima®, JuniorPlus® and Smartflow®, ideal for locating in areas with low or medium traffic, for example, restaurants, bars, offices, etc.

Due to their low noise level during operation, these hand dryers are also ideal for installation in places where quiet is important, such as museums, libraries, cinemas, theatres, etc.

The main advantages of these hand dryers are:

- Very low noise level, making it the best option for toilet environments with low or medium traffic, where they are required to be as quiet as possible.
- Zero maintenance thanks to their brushless motors (Optima® and JuniorPlus®). Easy to clean.
- Adjustable detection distance, in all the automatic models of the range, in order to obtain the optimal hand detection distance depending on the available light.
- Built-in safety systems, such as thermal cut-off in the motors and in the heating elements and automatic cut-out system that prevent accidents such as fire, electrocution, trapping, etc.
- Quality, robustness and reliability thanks to the use of top quality components manufactured in accordance with the strictest quality standards.



OPTIMA

A modern design for a reliable, quiet hand dryer with excellent performance.

- Zero maintenance thanks to its brushless motor. Easy to clean
- Hygienic thanks to its automatic operation that prevents having to touch the machine
- Adjustable hand detection distance
- One of the quietest machines in its category (only 57 dBA)
- The heating element and the motor have built-in safety thermal cut-off
- An ideal balance between performance and price



HAND DRYERS *optima* sensor operated



M99A

material: **steel**
finish: **white epoxy**



M99AC

material: **AISI 304 stainless steel**
finish: **bright**



M99ACS

material: **AISI 304 stainless steel**
finish: **satin**




M99A · M99AC · M99ACS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with 4 Allen bolts
- Base in ABS thermoplastic
- Thermoplastic fan wheel
- Class F induction motor incorporating a safety thermal cut-off
- PP UL 94-V0 centrifugal single inlet fan wheel
- Heating element incorporating a safety thermal cut-off
- Electronic infrared detection sensor
- Adjustable detection distance 5-25 cm
- Zamak air outlet grill

M99A · M99AC · M99ACS TECHNICAL SPECIFICATIONS


| | |
|---|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class II |
| Total power | 1,640 W |
| Consumption | 7 A |
| Motor power | 140 W |
| r.p.m. | 2,800 |
| Heating element power | 1,500 W |
| Weight | 4.45 Kg |
| Cover thickness | 1.5 mm |
| Drying time | 38 sec |
| Air velocity | 50 Km/h |
| Air temperature (10 cm distance / 21°C) | 57°C |
| Sound pressure (at 2m) | 57 dBA |
| Protection rating | IP21 |

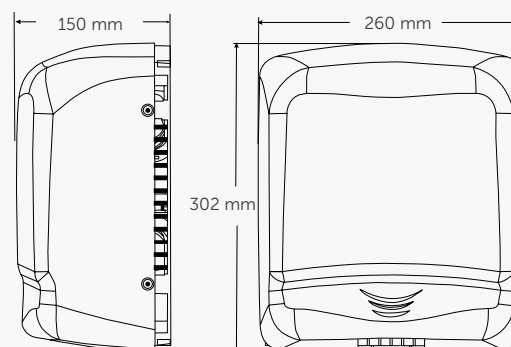

JUNIORPLUS

Hand dryer with the cover manufactured in high impact ABS, with a very attractive quality-price ratio.

- Zero maintenance thanks to its brushless motor. Easy to clean
- Manual or automatic operating options
- Adjustable hand detection distance (M88APLUS)
- Quiet (only 57 dBA)
- Elegantly designed cover, manufactured in high impact ABS
- The heating element and the motor have built-in safety thermal cut-off
- Very attractive quality-price ratio



HAND DRYERS juniorplus

push-button / sensor operated



M88PLUS

material: **ABS**
finish: **white**



M88APLUS

material: **ABS**
finish: **white**



M88PLUS · M88APLUS COMPONENTS AND MATERIALS

M88PLUS · M88APLUS

- One-piece cover fixed to the base by four screws
- Base in ABS thermoplastic
- Thermoplastic fan wheel
- PP UL 94-V0 centrifugal single inlet fan wheel
- Class F induction motor incorporating a safety thermal cut-off
- Heating element incorporating a safety thermal cut-off

- Zamak air outlet grill

M88APLUS

- Electronic infrared detection sensor
- Adjustable detection distance 5 - 25 cm


M88PLUS

- The button activates an electronic timer with a cycle of 45 seconds


M88PLUS · M88APLUS TECHNICAL SPECIFICATIONS

| | |
|---|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class II |
| Total power | 1,640 W |
| Consumption | 7 A |
| Motor power | 140 W |
| r.p.m. | 2,800 |
| Heating element power | 1,500 W |
| Weight | 3 Kg |
| Cover thickness | 3 mm |
| Drying time | 38 sec |
| Air velocity | 50 Km/h |
| Air temperature (10 cm distance / 21°C) | 57°C |
| Sound pressure (at 2m) | 57 dBA |
| Protection rating | IP21 |

M88PLUS



M88APLUS





SMARTFLOW

Compact hand dryer, strong and at a very competitive price.

- Easy cleaning and maintenance
- Hygienic thanks to its automatic operation that prevents contact with the machine
- The heating element and the motor have built-in safety thermal cut-off
- Adjustable hand detection distance
- Quiet (67 dBA)
- Elegantly designed cover, manufactured in high impact ABS
- Economical



HAND DRYERS smartflow® sensor operated



M04A

material: **ABS**
finish: **white**



M04AC

material: **ABS**
finish: **bright grey**



M04ACS

material: **ABS**
finish: **satin grey**




M04A · M04AC · M04ACS COMPONENTS AND MATERIALS

- One-piece cover in ABS thermoplastic. Fixed to the base by two screws
- Thermoplastic base
- Class B brush motor incorporating a safety thermal cut-off
- Helicoidal fan wheel
- Heating element incorporates a safety thermal cut-off
- Electronic infrared detection sensor
- Adjustable detection distance 5 - 25 cm

M04A · M04AC · M04ACS TECHNICAL SPECIFICATIONS

| | |
|---|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class II |
| Total power | 1,100 W |
| Consumption | 4.8 A |
| Motor power | 150 W |
| r.p.m. | 15,000 |
| Heating element power | 950 W |
| Weight | 1.2 Kg |
| Cover thickness | 3 mm |
| Drying time | 39 sec |
| Air velocity | 100 Km/h |
| Air temperature (10 cm distance / 21°C) | 55°C |
| Sound pressure (at 2m) | 67 dBA |
| Protection rating | IP23 |

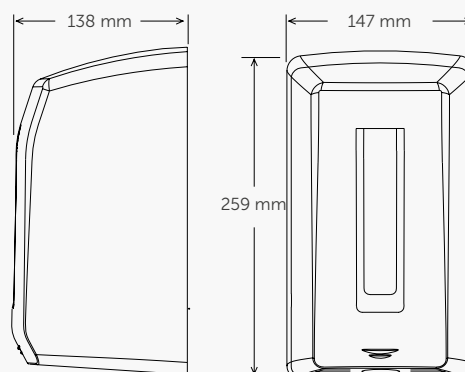



HAND DRYERS

Table

New Generation Hand Dryers

Dualflow Plus



Machflow



Speedflow



| | | | |
|--|---|--|---|
| Category | ECO-HIGH SPEED | | |
| Application | HIGH TRAFFIC | | |
| Drying time | 8-15 " | | |
| Estimated drying time | 8-15" (eco 10-15") | 8-15" (eco 10-15") | 10-12" |
| Voltage / Frequency | 220-240V 50/60Hz | 220-240V 50/60Hz | 100-240V 50/60Hz |
| Aislamiento eléctrico | Class I | Class I | Class I |
| Measurements | 665 x 320 x 228 mm | 330 x 213 x 170 mm | 270 x 290 x 100 mm |
| Weight | 8.3 Kg | 5.1 Kg | 3.8 Kg |
| Total power | 420 - 1,500 W | 420-1,500 W | 1,010 - 1,150 W (H.E. on*) 110 - 250 W (H.E off) |
| Power consumption | 3.2 A - 6.4 A | 3.2 A - 6.4 A | 4.2 A - 4.8 A (230 V) H.E. on 1.3 A - 2 A (230 V) H.E. off |
| Detection | Automatic | Automatic | Automatic |
| Cover | | | |
| Material | ABS | 1. Stainless Steel 2. Steel | 1. Stainless Steel 2. Steel |
| Finish | White / Black / Satin | 1. Bright / Satin 2. White / Black epoxy | 1. Bright / Satin 2. White / Black epoxy |
| Thickness | 3 mm | 1.5 mm | 1.5 mm |
| Base: | | | |
| Material | PA6 V0 | PA6 + 30% GF V0 | Aluminium |
| Thickness | 3 mm | 3 mm | 3 mm |
| Motor: | | | |
| Type | Vacuum universal brush motor | Vacuum universal brush motor | Universal brush motor |
| Class | F | F | A |
| Power | 420 - 1,100 W | 420 - 1,100 W | 110 - 250 W |
| rpm | 19,000-30,000 rpm | 19,000-30,000 rpm | 8,500-11,200 rpm |
| Bushes lifespan | 1,500h / 600,000 serv (cicle=9") | 1,500h / 600,000 serv (cicle=9") | 1,500h / 450,000 serv (cicle=12") |
| Protection | Fuse on PCB | Fuse on PCB | Safety thermal cut-off auto-reset |
| Fan Wheel | | | |
| Tipo | Centrifugal, single inlet, high pressure | Centrifugal, single inlet, high pressure | Double inlet, centrifugal, asymetrical |
| Material | Aluminium | Aluminium | Aluminium |
| Caract. Fluidicas | | | |
| Effective air flow | 94 - 165 m ³ /h (1,570-2,750 L/min) | 121 - 190 m ³ /h (2,010 - 3,152 L/min) | 70-96 m ³ /h (1,170-1,600 L/m) |
| Air velocity | 234- 410 Km/h | 191-325 Km/h | 120-180 Km/h |
| Heating Element (H.E): | | | |
| Power | 400W | 400W | 900 W |
| Wire | Ni-Crom | Ni-Crom | Ni-Crom |
| Protection | Safety thermal cut-off | Safety thermal cut-off | Safety thermal cut-off |
| Air temperature | 40°C | 40°C | 42°C |
| Sound pressure | 62-72dBA | 67-74 dBA | 58-67dBA |
| Protection level | IPX4 | IP23 | IP23 |
| Disconnection (continuous use time) | 30" | 60" | 60" |
| ADA | yes | w / recessed kit | yes |



HAND DRYERS

Table

Traditional Hand Dryers

Saniflow



Mediflow



| HEAVY DUTY | MODERN |
|--|--|
| HIGH - TRAFFIC | HIGH - TRAFFIC |
| 20-30 " | 20-30 " |
| 29" | 29" |
| 220-240V 50/60Hz Class I 245x276x214 mm 248x278x212 mm 255x282x215 mm | 220-240V 50/60Hz Class II 325x275x164 mm |
| 4.65 / 5.9 / 11.5 Kg 2.250 W | 4.25 Kg 250-2.750 W |
| 10 A | 1,1-12 A |
| Autom / Push - button | Autom / Push - button |
| 1. Stainless steel 2. Steel 3. Cast iron | 1. Stainless steel 2. Steel |
| 1. Bright / Satin 2. White / Black epoxy; White / Black enamelled; Bright / Satin / Gold plated 3. White enamelled | 1. Bright / Satin 2. White / Black epoxy |
| 1.5 / 6 mm | 1.5 mm |
| Aluminium 3 mm | PA 6 V0 3 mm |
| Universal brush motor F 250 W 5,500 rpm 1st set 1,500h/200,000 serv 2nd set 1,500h/ 200,000 serv (cycle=29") Safety thermal cut-off auto-reset | Universal brush motor F 250 W 4,500 rpm 1st set 1,500h/200,000 serv 2nd set 1,500h/ 200,000 serv (cycle=29") Safety thermal cut-off auto-reset |
| Double inlet, centrifugal, asymmetrical Aluminium | Double inlet, centrifugal, asymmetrical Aluminium |
| 253 m³/h (4,248 L/m) 100 Km/h | 450 m³/h (7,500 L/m) 95 Km/h |
| 2,000 W Ni-Crom Safety thermal cut-off | 0-2,500 W Cr-Al-Fe Banda Safety thermal cut-off |
| 50°C | 49°C |
| 70dBA | 65dBA |
| IP23 | IP23 |
| E05,E88: 36" E05A= 60" E88A: --- | M02A: 120" M03A: --- |
| w / recessed kit | w / recessed kit |

Low Medium Traffic Range

Optima



Juniorplus



Smartflow












| MONEY FOR VALUE | | |
|---|---|--|
| MEDIUM TRAFFIC | LOW TRAFFIC | |
| 30-40 " | | |
| 38" | 38" | 39" |
| 220-240V 50/60Hz Class II 302x260x150 mm | 220-240V 50/60Hz Class II 303x253x150 mm | 220-240V 50/60Hz Class II 259x147x138 mm |
| 4.45 Kg 1.640 W 7 A | 3 Kg 1.640 W 7 A | 1.2 Kg 1.100 W 4,8 A |
| Automatic | Autom/Push - button | Automatic |
| 1. Stainless steel 2. Steel 1. Bright / Satin 2. White epoxy 1.5 mm | ABS White 3 mm | ABS 1. White / Bright / Satin 3 mm |
| ABS V0 3 mm | ABS V0 3 mm | PP +Talcum 3 mm |
| Induction F 140 W 2,800 rpm --- Safety thermal cut-off auto-reset | Induction F 140 W 2,800 rpm --- Safety thermal cut-off auto-reset | Universal, brush motor B 150 W 15,000 rpm 1,000h/100,000 serv (cycle=39") Safety thermal cut-off auto-reset |
| Single inlet, centrifugal PP V0 | Single inlet, centrifugal PP V0 | Helicoidal PP V0 |
| 215 m³/h (3,590 L/m) 50 Km/h | 215 m³/h (3,590 L/m) 50 Km/h | 102 m³/h (1,700 L/m) 100 Km/h |
| 1,500 W Ni-Crom 40 Safety thermal cut-off | 1,500 W Ni-Crom 40 Safety thermal cut-off | 950 W Ni-Crom Safety thermal cut-off |
| 57°C | 57°C | 55°C |
| 57dBA | 57dBA | 67dBA |
| IP21 | IP21 | IP23 |
| 60" | M88PLUS: 45" M88APLUS: 60" | 60" |
| --- | --- | --- |



HAND DRYERS

Table

| | MODEL | OPERATION | | MATERIAL / FINISH | | | | | | | | |
|---|---------------|-----------|--------|-------------------|-------------------|---------------------------------|--------------------------------|-----------------------------------|-------------------------------|-------------------------------|---------------------|--------------------|
| | | manual | sensor | steel white epoxy | steel black epoxy | AISI 304 stainless steel bright | AISI 304 stainless steel satin | cast iron white enamelled coating | steel white enamelled coating | steel black enamelled coating | steel chrome bright | steel chrome satin |
|  | dualflow plus | | | | | | | | | | | |
| | M14A | | ● | | | | | | | | | |
| | M14AB | | ● | | | | | | | | | |
| | M14ACS | | ● | | | | | | | | | |
|  | machflow | | | | | | | | | | | |
| | M09A | | ● | ● | | | | | | | | |
| | M09AB | | ● | | ● | | | | | | | |
| | M09AC | | ● | | | ● | | | | | | |
| | M09ACS | | ● | | | | ● | | | | | |
|  | speedflow | | | | | | | | | | | |
| | M06A | | ● | ● | | | | | | | | |
| | M06AB | | ● | | ● | | | | | | | |
| | M06AC | | ● | | | ● | | | | | | |
| | M06ACS | | ● | | | | ● | | | | | |
|  | saniflow | | | | | | | | | | | |
| | E05 | ● | | ● | | | | | | | | |
| | E05B | ● | | | ● | | | | | | | |
| | E05C | ● | | | | ● | | | | | | |
| | E05CS | ● | | | | | ● | | | | | |
| | E85 | ● | | | | | | ● | | | | |
| | E88 | ● | | | | | | | ● | | | |
| | E88B | ● | | | | | | | | ● | | |
| | E88C | ● | | | | | | | | | ● | |
| | E88CS | ● | | | | | | | | | | ● |
| | E88O | ● | | | | | | | | | | |
|  | E05A | | ● | ● | | | | | | | | |
| | E05AB | | ● | | ● | | | | | | | |
| | E05AC | | ● | | | ● | | | | | | |
| | E05ACS | | ● | | | | ● | | | | | |
| | E85A | | ● | | | | | ● | | | | |
| | E88A | | ● | | | | | | ● | | | |
| | E88AB | | ● | | | | | | | ● | | |
| | E88AC | | ● | | | | | | | | ● | |
| | E88ACS | | ● | | | | | | | | | ● |
| | E88AO | | ● | | | | | | | | | |
| | | | | | | | | | | | | |
|  | mediflow | | | | | | | | | | | |
| | M02A | | ● | ● | | | | | | | | |
| | M02AB | | ● | | ● | | | | | | | |
| | M02AC | | ● | | | ● | | | | | | |
| | M02ACS | | ● | | | | ● | | | | | |
| | M03A | | ● | ● | | | | | | | | |
| | M03AB | | ● | | ● | | | | | | | |
| | M03AC | | ● | | | ● | | | | | | |
| | M03ACS | | ● | | | | ● | | | | | |
|  | optima | | | | | | | | | | | |
| | M99A | | ● | ● | | | | | | | | |
| | M99AC | | ● | | | ● | | | | | | |
| | M99ACS | | ● | | | | ● | | | | | |
|  | juniorplus | | | | | | | | | | | |
| | M88APLUS | | ● | | | | | | | | | |
| | M88PLUS | ● | | | | | | | | | | |
|  | smartflow | | | | | | | | | | | |
| | M04A | | ● | | | | | | | | | |
| | M04AC | | ● | | | | | | | | | |
| | M04ACS | | ● | | | | | | | | | |

HAND DRYERS

Table

| | | | | | ADJUSTABLE DISTANCE DETECTION | ADJUSTABLE POWER | MOTOR | | TRAFFIC FREQUENCY | | | MODEL |
|--------------------------|--------------|--------------|-----------------------|----------------------|-------------------------------------|---------------------|-----------|-------|----------------------|--------|-----|----------|
| steel gold- plated | ABS white | ABS black | ABS grey bright | ABS grey satin | | | induction | brush | HIGH | MEDIUM | LOW | |
| | | | | | | | | | dualflow plus | | | |
| | ● | | | | | ● | | ● | ● | | | M14A |
| | | ● | | | | ● | | ● | ● | | | M14AB |
| | | | | ● | | ● | | ● | ● | | | M14CS |
| | | | | | | | | | machflow® | | | |
| | | | | | ● | ● | | ● | ● | | | M09A |
| | | | | | ● | ● | | ● | ● | | | M09AB |
| | | | | | ● | ● | | ● | ● | | | M09AC |
| | | | | | ● | ● | | ● | ● | | | M09ACS |
| | | | | | | | | | speedflow® | | | |
| | | | | | ● | ● | | ● | ● | | | M06A |
| | | | | | ● | ● | | ● | ● | | | M06AB |
| | | | | | ● | ● | | ● | ● | | | M06AC |
| | | | | | ● | ● | | ● | ● | | | M06CS |
| | | | | | | | | | saniflow® | | | |
| | | | | | | | | ● | ● | | | E05 |
| | | | | | | | | ● | ● | | | E05B |
| | | | | | | | | ● | ● | | | E05C |
| | | | | | | | | ● | ● | | | E05CS |
| | | | | | | | | ● | ● | | | E85 |
| | | | | | | | | ● | ● | | | E88 |
| | | | | | | | | ● | ● | | | E88B |
| | | | | | | | | ● | ● | | | E88C |
| | | | | | | | | ● | ● | | | E88CS |
| ● | | | | | | | | ● | ● | | | E88O |
| | | | | | ● | | | ● | ● | | | E05A |
| | | | | | ● | | | ● | ● | | | E05AB |
| | | | | | ● | | | ● | ● | | | E05AC |
| | | | | | ● | | | ● | ● | | | E05ACS |
| | | | | | ● | | | ● | ● | | | E85A |
| | | | | | ● | | | ● | ● | | | E88A |
| | | | | | ● | | | ● | ● | | | E88AB |
| | | | | | ● | | | ● | ● | | | E88AC |
| | | | | | ● | | | ● | ● | | | E88ACS |
| ● | | | | | ● | | | ● | ● | | | E88AO |
| | | | | | | | | | mediflow® | | | |
| | | | | | ● | | | ● | | ● | | M02A |
| | | | | | ● | | | ● | | ● | | M02AB |
| | | | | | ● | | | ● | | ● | | M02AC |
| | | | | | ● | | | ● | | ● | | M02ACS |
| | | | | | ● | | | ● | | ● | | M03A |
| | | | | | ● | | | ● | | ● | | M03AB |
| | | | | | ● | | | ● | | ● | | M03AC |
| | | | | | ● | | | ● | | ● | | M03ACS |
| | | | | | | | | | optima | | | |
| | | | | | ● | | ● | | | ● | | M99A |
| | | | | | ● | | ● | | | ● | | M99AC |
| | | | | | ● | | ● | | | ● | | M99ACS |
| | | | | | | | | | juniorplus | | | |
| | ● | | | | ● | | ● | | | ● | | M88APLUS |
| | ● | | | | | | ● | | | ● | | M88PLUS |
| | | | | | | | | | smartflow® | | | |
| | ● | | | | ● | | | ● | | | ● | M04A |
| | | | ● | | ● | | | ● | | | ● | M04AC |
| | | | | ● | ● | | | ● | | | ● | M04ACS |

02

HAIR DRYERS

have a great Hair Day!

● Busan, South Korea







HAIR DRYERS

Public use hair dryers, especially designed for facilities with high traffic or individual use hair dryers.

- Large variety of hair dryers in different designs, finishes and performances.
- The public use hair dryers are robust, reliable and especially designed to work in areas with high or very high traffic, such as sports facilities, swimming pools, children's play areas, campings, etc. They incorporate all the relevant safety and vandal proof measures for trouble-free operation in these high traffic areas.
- The individual use hair dryers are quiet, with a powerful flow of air and a long useful life. Compact and balanced models thanks to their light weight, direct current motors. Designed for use in hotel rooms, hospitals, old people's homes, etc. these hair dryers have a speed regulator that allows the best drying function to be chosen at any given time.



HAIR DRYERS

public use / push-button



SC0088H

material: **steel**
finish: **white enamelled coating**



SC0088HCS

material: **steel**
finish: **satin chrome**



SC1088HT

material: **steel**
finish: **white enamelled coating**



SC1088HTCS

material: **steel**
finish: **satin chrome**



These models are also available with a white cast iron cover: SC0085H · SC1085HT

SC0088H · SC0088HCS · SC1088HT · SC1088HTCS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow key®
- 3 mm thick aluminium base
- Fire resistant plastic UL 94-VO fan scroll
- Class F universal motor incorporating a safety
- Aluminium centrifugal double symmetrical inlet fan wheel
- Heating element protected by a safety thermal cut-off
- Nozzle in chrome-plated zamak®
- Zamak® chrome-plated button activates an electro-mechanic timer with a 90-second cycle

SC0088H · SC00HCS

- 360° revolving nozzle

SC1088HT · SC1088HTCS

- Extendable white polyurethane tube
- PBT thermoplastic air nozzle

SC0088H · SC0088HCS · SC1088HT · SC1088HTCS TECHNICAL SPECIFICATIONS

| | |
|------------------------|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Motor power | 250 W |
| r.p.m. | 5500 |
| Cover thickness | 1.5 mm |
| Sound pressure (at 2m) | 70 dBA |


SC0088H · SC0088HCS

| | |
|-----------------------|---------|
| Total power | 2,250 W |
| Consumption | 10 A |
| Weight | 5.9 Kg |
| Heating element power | 2,000 W |
| Air temperature | 53°C |


SC1088HT · SC1088HTCS

| | |
|-----------------------|---------|
| Total power | 1,000 W |
| Consumption | 4.5 A |
| Heating element power | 750 W |
| Air temperature | 40°C |

SC0088H · SC0088HCS

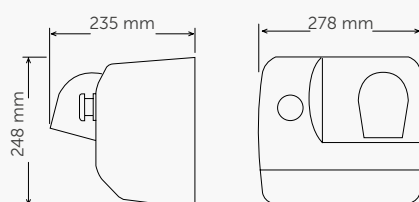

SC1088HT · SC1088HTCS

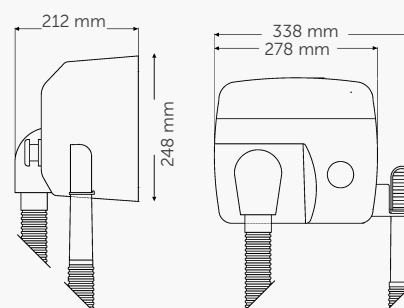

HAIR DRYERS

public use / automatic

NEW



SC0009

material: **stainless steel**
finish: **white epoxy**









NEW



SC0009CS

material: **stainless steel**
finish: **satin**










SC0009 · SC0009CS COMPONENTS AND MATERIALS

- One-piece weld-free cover
- Turns on automatically on unhooking the handle
- Class F high pressure universal brush motor
- Maximum air velocity: 205 Km/h
- Motor power is adjustable, allowing electricity consumption to be regulated
- Heating element protected by a safety thermal cut-off.
- Extendable white polyurethane tube.
- Connector piece of the dryer with the tube made of PBT thermoplastic.
- Handle and handle support made in ABS
- The base includes four silent-blocks to cushion mechanical vibrations
- PA6 V0 internal set
- Disconnects automatically after 60 seconds of continuous use

SC0009 · SC0009CS TECHNICAL SPECIFICATIONS

| | |
|--|-------------------------|
| Voltage | 220-240 V |
| Frequency | 50 - 60 Hz |
| Electrical Isolation | Class I |
| Total power | 200 - 1,00 W |
| Consumption | 2.4 - 5.2 A |
| Motor power | 200 - 400 W |
| rpm | 14,000 - 19,000 |
| Heating element power | 0-600 W (on/off switch) |
| Weigth | 5.6 Kg |
| Air velocity | 140 - 205 Km/h |
| Air temp. (d=10 cm and room temp=21°C) | 45°C |
| Sound pressure (at 2m) | 65-73 dBA |
| Length of the hose | 800-2,000 mm |
| Protection rating | IP23 |

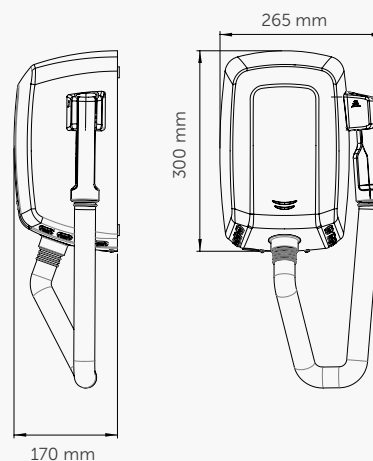

HAIR DRYERS

individual use / automatic



SC0004

material: **ABS**
finish: **white**



SC0087

material: **polycarbonate**
finish: **white**



SC0088

with shaver sockets

material: **polycarbonate**
finish: **white**



SC0004 · SC0087 · SC0088 COMPONENTS AND MATERIALS

SC0004 · SC0087 · SC0088

- The heating element includes a safety thermal cut-off
- Turns on automatically on unhooking the hand piece
- White ABS thermoplastic handle. With internal thermal reinforcement; there is no danger if the hand piece falls into water

SC0004

- PBT thermoplastic casing
- Class B brush motor incorporating a safety thermal cut-off
- PP UL94-V0 helicoidal fan wheel
- Extendable white polyurethane tube. Fixed to rotating bearings that prevent it from rolling back on itself

rings that prevent it from rolling back on itself

SC0087 · SC0088

- Weld-free housing in self-extinguishing polycarbonate UL 94 V Ø
- DC motor, includes a thermal overload switch
- Thermoplastic axial turbine
- Heating element incorporates safety thermal cut-off
- Extendable white polyurethane tube
- Speed selector with three settings

SC0088

- Two sockets for shaver, 115 or 220 V


SC0004 · SC0087 · SC0088 TECHNICAL SPECIFICATIONS

SC0004 · SC0087 · SC0088

| | |
|--|---------------------------------------|
| Voltage | 220-240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class II |
| Air temp. (d=10 cm and room temp=21°C) | 50°C |
| Installation height | 1,300 - 1,500 mm |
| SC0087 · SC0088 | |
| Total power | 600 - 1,100 W |
| Consumption | 2.6 A - 5.2 A |
| Motor power | 60 W |
| r.p.m | 4,000 - 5,000 |
| Cover thickness | 1.5 mm |
| Effective airflow | 65 m ³ / h (1,080 l / min) |
| Air velocity | 55 Km / h |
| Sound pressure (at 2 m) | 68 dBA |
| Protection rating | IP20 |
| Tube lenght | 550 - 1,800 mm |

SC0004

| | |
|-------------------------|-------------------------------------|
| Total power | 850 W |
| Consumption | 3 A |
| Motor power | 150 W |
| r.p.m | 15,000 |
| Heating element power | 700 W |
| Cover thickness | 3 mm |
| Effective airflow | 40 m ³ / h (667 l / min) |
| Air velocity | 79 Km / h |
| Sound pressure (at 2 m) | 69 dBA |
| Protection rating | IP23 |
| Tube lenght | 800 - 2,000 mm |

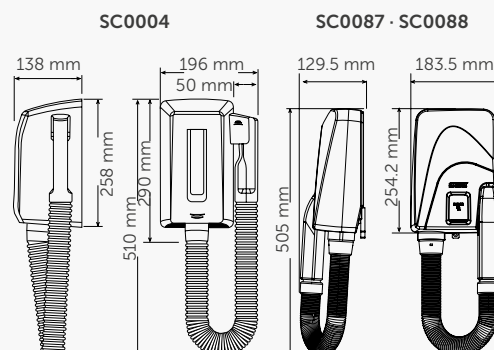

HAIR DRYERS

individual use / push - button



SC0010

material: **ABS**
finish: **white**



SC0010CS

material: **ABS**
finish: **black**



SC0020

material: **ABS**
finish: **white**



SC0020CS

material: **ABS**
finish: **black**



Exclusive individual use bathroom wall mounting hair dryers with a functional, robust and trendy design that blends into any space perfectly such as hotels, hospitals or elderly care centers.


SC0010 · SC0010CS · SC0020 · SC0020CS COMPONENTS AND MATERIALS

- Hairdryer with on / off switch and polypropylene flow-direction nozzle
- Heavy-duty 650-1800 mm coiled power cord
- Plug with 1,000 mm power cord
- ABS wall support
- Speed selector (two settings)
- The motor incorporates a safety thermal cut-off
- Polycarbonate turbine


SC0010 · SC0010CS · SC0020 · SC0020CS TECHNICAL SPECIFICATIONS

| | |
|---|---------------------------------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class II |
| Total power | 540 - 1,240 W |
| Consumption | 2.7 - 4.9 A |
| Motor power | 40 W |
| r.p.m. | 1,1000 - 1,3000 |
| Heating element power | 1,200 W |
| Weight | 0.7 Kg |
| Effective airflow | 73 m ³ / h (1,217 l / min) |
| Air velocity | 54 Km / h |
| Air temperature (10 cm distance / 21°C) | 61°C |
| Sound pressure (at 2m) | 60 dBA |
| Installation height | 1,300 - 1,500 mm |
| Cable lenght | 610 - 1,800 mm |

SC0010 · 10CS

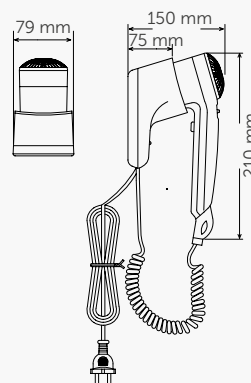

SC0020 · SC0020CS

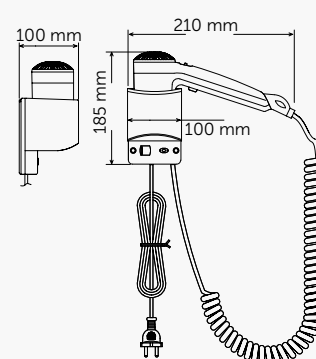

HAIR DRYERS

individual use / push - button




SC0030
with shaver sockets

material: **ABS**
finish: **white**



SC0030CS
with shaver sockets

material: **ABS**
finish: **black**

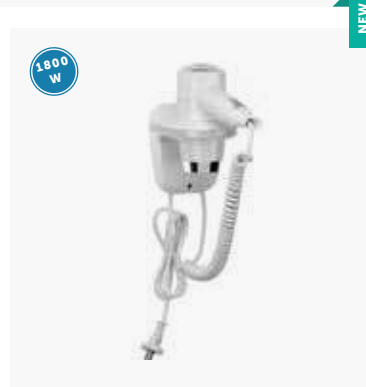

SC0040

material: **ABS**
finish: **white**



Exclusive individual use bathroom wall mounting hair dryers with a functional, robust and trendy design that blends into any space perfectly such as hotels, hospitals or elderly care centers.


SC0030 · SC0030CS · SC0040 COMPONENTS AND MATERIALS

- Hairdryer with on/off switch and polypropylene air flow nozzle
 - Heavy-duty 650-1,800 mm coiled power cord
 - Plug with 1,000 mm power cord
 - ABS wall support
 - Speed selector (two settings)
 - The motor incorporates a safety thermal cut-off
 - Polycarbonate turbine
- SC0030CS**
- Two sockets for shaver, 115 or 220 V, protected by a transparent plastic box

SC0030 · SC0030CS · SC0040 TECHNICAL SPECIFICATIONS




| SC0030 · SC0030CS | |
|---------------------------------------|------------------------------------|
| Voltage | 220- 240 V |
| Frequency | 50/60 Hz |
| Electrical Isolation | Class II |
| Total power | 540-1,240 W |
| Consumption | 2.7 – 4.9 A |
| Motor power | 40 W |
| rpm | 11,000-13,000 |
| Heating element power | 1,200 W |
| Weight | 1.3 Kg |
| Effective airflow | 73 m ³ /h (1,217 L/min) |
| Air velocity | 54 Km/h |
| Air temperature (10 cm distance/21°C) | 61°C |
| Sound pressure (at 2m) | 60 dBA |
| Installation height | 1,300–1,500 mm |
| Cable lenght | 610–1,800 mm |

| SC0040 | |
|---------------------------------------|------------------------------------|
| Voltage | 220-240 V |
| Frequency | 50/60 Hz |
| Electrical Isolation | Class II |
| Total power | 200–1,800 W |
| Consumption | 0.9 – 7 A |
| Motor power | 170 W |
| rpm | 9,000 - 18,000 |
| Heating element power | 1,600 W |
| Weight | 0.8 Kg |
| Effective airflow | 80 m ³ /h (1,330 L/min) |
| Air velocity | 60 Km/h |
| Air temperature (10 cm distance/21°C) | 63°C |
| Sound pressure (at 2m) | 68 dBA |
| Protection rating | IP20 |
| Installation height | 1,300–1,500 mm |
| Cable lenght | 610–1,800 mm |

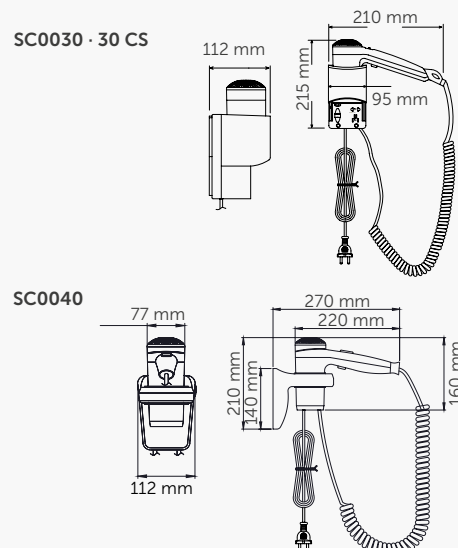

HAIR DRYERS


Table

| | MODEL | USE | | OPERATION | | MATERIAL / FINISH | | | | | | |
|---|------------|--------|------------|-----------|------------|---------------------------------|--------------------|-----------------------------|----------------------------|----------------------|-----------|-----------|
| | | Public | Individual | Manual | Auto-matic | Steel white porcelain enamelled | Steel satin chrome | Stainless steel white epoxy | Sainles steel satin chrome | Poly-carbonate white | ABS white | ABS black |
|  | SC0088H | • | | • | | • | | | | | | |
| | SC0088HCS | • | | • | | | • | | | | | |
| | SC1088HT | • | | • | | • | | | | | | |
| | SC1088HTCS | • | | • | | | • | | | | | |
| | SC0009 | • | | | • | | | • | | | | |
| | SC0009CS | • | | | • | | | | • | | | |
|  | SC0004 | | • | | • | | | | | | • | |
| | SC0087 | | • | | • | | | | | • | | |
| | SC0088 | | • | | • | | | | | • | | |
|  | SC0010 | | • | • | | | | | | | • | |
| | SC0010CS | | • | • | | | | | | | | • |
| | SC0020 | | • | • | | | | | | | • | |
| | SC0020CS | | • | • | | | | | | | | • |
| | SC0030 | | • | • | | | | | | | • | |
| | SC0030CS | | • | • | | | | | | | | • |
| | SC0040 | | • | • | | | | | | | • | |

HAIR DRYERS

Table

| SPEED SELECTOR | OPERATING TIMER | | ADDITIONAL THERMAL CUT-OFF SAFETY COMPONENTS | SOCKET FOR ELECTRIC SHAVER | SUITABLE FOR | | | MODEL |
|----------------|--------------------|-----|---|-------------------------------------|---------------------------|------------------------------------|--|------------|
| | 90" | 60" | | | Gyms and sport centres | Hospitals and health centres | Hotels and other accom- modation | |
| | • | | • | | • | | | SC0088H |
| | • | | • | | • | | | SC0088HCS |
| | • | | • | | • | | | SC1088HT |
| | • | | • | | • | | | SC1088HTCS |
| | | • | • | | • | | | SC0009 |
| | | • | • | | • | | | SC0009CS |
| | • | | • | | | • | • | SC0004 |
| • | • | | • | | | • | • | SC0087 |
| • | | | • | • | | • | • | SC0088 |
| • | | | • | | | • | • | SC0010 |
| • | | | • | | | • | • | SC0010CS |
| • | | | • | | | • | • | SC0020 |
| • | | | • | | | • | • | SC0020CS |
| • | | | • | • | | • | • | SC0030 |
| • | | | • | • | | • | • | SC0030CS |
| • | | | • | | | • | • | SC0040 |



SOAP DISPENSERS

keeping up healthy habits

● Leonardo Glass Cube, Bad Driburg, Germany





SOAP DISPENSERS


Large range of easy maintenance soap dispensers

- Large selection of soap dispensers manufactured in various materials (stainless steel, plastic, etc.), different finishes (white, black, brushed, bright, etc.) different capacities (from 0.8 to 1.5 l) and different operating methods (automatic, push button, lever, etc.) for wall installation or recessed in the countertop
- Suitable for various types of soap (liquid, foam, spray), depending on the model
- Refillable soap tanks
- Exterior sight glass for soap level
- Lock with special key for protection against vandals


SOAP DISPENSERS

surface


AUTOMATIC




DJ0037A
liquid soap

DJF0038A 
foam


capacity: **1 L**
material: **AISI 304 stainless steel**
finish: **white epoxy**




DJ0037AB
liquid soap

DJF0038AB 
foam


capacity: **1 L**
material: **AISI 304 stainless steel**
finish: **matte black epoxy**




DJ0037AC
liquid soap

DJF0038AC 
foam

capacity: **1 L**
material: **AISI 304 stainless steel**
finish: **bright**



DJ0037ACS
liquid soap

DJF0038ACS 
foam

capacity: **1 L**
material: **AISI 304 stainless steel**
finish: **satin**

Automatic soap dispenser activated by means of an infrared sensor and manufactured in AISI 304 stainless steel. Liquid or foam soaps can be used depending on the chosen valve.

"Touch-free" operation reduces the risk of germs and cross-contamination during the washing process because the user does not have to touch the soap dispenser. It promotes health and wellness by preventing the spread of infectious diseases.

DJ0037A · DJF0038A · DJ0037AB · DJF0038AB · DJ0037AC · DJF0038AC · DJ0037ACS · DJF0038ACS COMPONENTS AND MATERIALS

- Infra-Red detection (5 cm hand detection)
- Vandal resistant casing with lock
- Frontal content viewer
- Corrosion-resistant anti-drip valve
- Inner plastic tank, easily removable for cleaning
- Hinged cover for operator convenience and speed of service
- Opening on top with provided Mediclinics standard key
- Operates on 6 AA alkaline batteries

DJ0037A · DJF0038A · DJ0037AB · DJF0038AB · DJ0037AC · DJF0038AC · DJ0037ACS · DJF0038ACS TECHNICAL SPECIFICATIONS

| | |
|---|-----------------------------------|
| DJ0037A · DJF0038A · DJ0037AB · DJF0038AB · DJ0037AC · DJF0038AC | |
| DJ0037ACS · DJF0038ACS | |
| Capacity | 1.0 L |
| Stainless steel thickness | 0.8 mm |
| Weight (empty) | 1.25 Kg |
| Recommended installation height | 25 – 30 cm from countertop/shelve |
| DJ0037A · DJ0037AB · DJ0037AC · DJ0037ACS | |
| Suitable soaps | Liquid soap |
| Quantity dispensed per pump | 1.5 ml |
| DJF0038A · DJF0038AB · DJF0038AC · DJF0038ACS | |
| Suitable soaps | Foam soap |
| Quantity dispensed per pump | 1 ml |



SOAP DISPENSERS

surface / recessed

AUTOMATIC




DJ0160AS

capacity: **0.8 L**

material: **aluminium / ABS**

finish: **chrome / black**

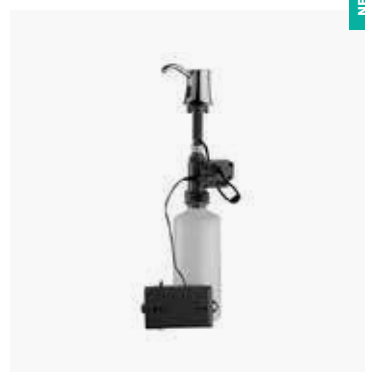

DJ0252AC

capacity: **1.6 L**

material: **chrome-plated brass**

finish: **bright**



DJ0160AS · DJ0252AC COMPONENTS AND MATERIALS

DJ0160AS

- Automatic operation triggered by infrared sensors
- LED flashes when the batteries need to be replaced
- Suitable for neutral pH, chlorine-free liquid hand soap
- Suitable for disinfectant solutions, liquid soaps or hydroalcoholic gel
- Frontal content viewer
- Lock and special key supplied
- Transparent polyethylene tank
- ABS body with aluminium cover

DJ0252AC

- Automatic soap dispenser for recessing to the countertop with infra-Red detection

- The dispenser can be located on the left or right of the countertop
- Auto adjustment of the sensing range
- Refillable soap plastic tank made of PE, easily removable for emptying and cleaning
- Operates on 4 x D 1.5 V alkaline batteries. Standby power consumption < 100 µA and service power consumption < 1 A
- Suitable for soaps with a viscosity 2,000 – 3,500 cP and with neutral pH
- LED indicator: Continuous red LED = Batteries low voltage; Flashing blue LED = Low soap level; Flashing red LED = Malfunction or the sensor is detecting an object.

DJ0160AS · DJ0252AC TECHNICAL SPECIFICATIONS


DJ0160AS

| | |
|---------------------------------|--|
| Capacity | 0.8 L |
| Weight (empty) | 0.75 Kg |
| Recommended installation height | 20 – 25 cm from countertop |
| Suitable soaps | Chlorine-free hand soap with neutral pH, disinfectant solutions, liquid soaps and hydroalcoholic gel |
| Quantity dispensed per pump | 1 ml |


DJ0252AC

| | |
|-----------------------------|---|
| Capacity | 1.6 L |
| Weight (empty) | 0.95 Kg |
| Suitable soaps | Soaps with a viscosity 2,000 – 3,500 cP and with neutral pH |
| Quantity dispensed per pump | 0.8 – 2.2 ml |
| Protection rating | IP43 |

DJ0160AS



DJ0252AC

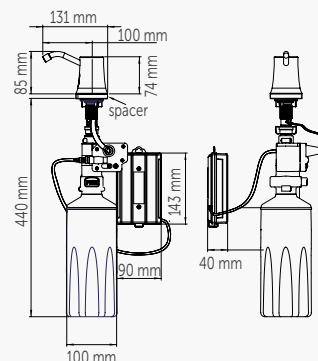

SOAP DISPENSERS

surface / push - button



DJ0031
liquid soap

DJF0032
foam

DJS0033
spray

capacity: **1,5 L**
material: **AISI 304 stainless steel**
finish: **white epoxy**



DJ0031B
liquid soap

DJF0032B
foam

DJS0033B
spray

capacity: **1,5 L**
material: **AISI 304 stainless steel**
finish: **matte black epoxy**



DJ0031C
liquid soap

DJF0032C
foam

DJS0033C
spray

capacity: **1,5 L**
material: **AISI 304 stainless steel**
finish: **bright**



DJ0031CS
liquid soap

DJF0032CS
foam

DJS0033CS
spray

capacity: **1,5 L**
material: **AISI 304 stainless steel**
finish: **satin**



DJ0031 · DJF0032 · DJS0033 · DJ0031B · DJF0032B · DJS0033B · DJ0031C · DJF0032C · DJS0033C · DJ0031CS · DJF0032CS · DJS0033CS COMPONENTS AND MATERIALS

- Vandal resistant casing with lock
- Frontal content viewer
- Stainless steel push-button
- Corrosion-resistant anti-drip valve
- Inner tank 2.5 mm thick made of translucent polypropylene
- Easily removable inner tank
- Hinged cover for operator convenience and speed of service
- Opening on top with provided Mediclinics standard key

DJ0031 · DJ0031B · DJ0031C · DJ0031CS

- Admits liquid soap or hydro-alcoholic gel

DJF0032 · DJF0032B · DJF0032C · DJF0032CS

- Exclusive use for foam soap

DJS0033 · DJS0033B · DJS0033C · DJS0033CS

- Exclusive use for disinfectant liquids

ONE SOAP DISPENSER, 3 POSSIBLE VALVES!


INTERCHANGABLES VALVES

liquid soap foam spray

RCDJ0031 V / RCDJF0032 V / RCDJS0033 V1

DJ0031 · DJF0032 · DJS0033 · DJ0031B · DJF0032B · DJS0033B · DJ0031C · DJF0032C · DJS0033C · DJ0031CS · DJF0032CS · DJS0033CS TECHNICAL SPECIFICATIONS

| | |
|--|--------------------------------------|
| Capacity | 1.5 L |
| Stainless steel thickness | 0.8 mm |
| Weight (empty) | 1.25 Kg |
| Recommended installation height | 15 - 20 cm from countertop |
| DJ0031 · DJ0031B · DJ0031C · DJ0031CS | |
| Suitable soaps | Liquid soaps and hydroalcoholic gels |
| Quantity dispensed per pump | 1.5 ml |
| DJF0032 · DJF0032B · DJF0032C · DJF0032CS | |
| Suitable soaps | Foam soaps |
| Quantity dispensed per pump | 1 ml |
| DJS0033 · DJS0033B · DJS0033C · DJS0033CS | |
| Suitable soaps | Liquid disinfectant soaps |
| Quantity dispensed per pump | 0.8 ml |

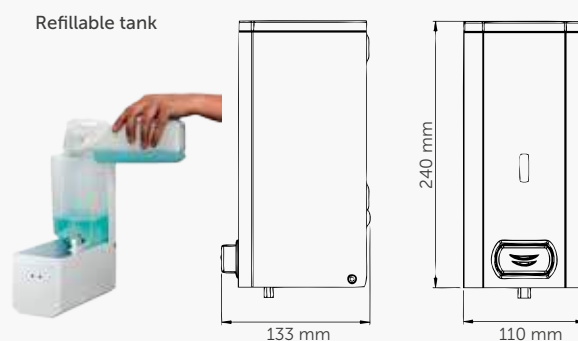

SOAP DISPENSERS

surface / push - button



DJ0040
capacity: 1,5 L

material: AISI 304 stainless steel
finish: white epoxy



DJ0040B
capacity: 1,5 L

material: AISI 304 stainless steel
finish: matte black epoxy



DJ0040C
capacity: 1,5 L

material: AISI 304 stainless steel
finish: bright



DJ0040CS
capacity: 1,5 L

material: AISI 304 stainless steel
finish: satin




DJ0040 · DJ0040B · DJ0040C · DJ0040CS COMPONENTS AND MATERIALS

- Vandal resistant casing with lock
- Frontal content viewer
- Stainless steel push-button
- Corrosion-resistant anti-drip valve
- Inner tank made of 2,5 mm thickness translucent polypropylene
- Easily removable inner tank
- Hinged cover for operator convenience and speed of service
- Opening on top with provided mediclinics key that allows soap refill
- Allows disinfectant solutions, liquid soap or hydro-alcoholic gel

DJ0040 · DJ0040B · DJ0040C · DJ0040CS TECHNICAL SPECIFICATIONS


| | |
|---------------------------------|--|
| Capacity | 1.5 L |
| Stainless steel thickness | 0.8 mm |
| Weight (empty) | 1.2 Kg |
| Recommended installation height | 15 – 20 cm from countertop |
| Suitable soaps | disinfectant solutions, liquid soaps or hydro-alcoholic gel |
| Quantity dispensed per pump | 0.8 ml |

Refillable tank

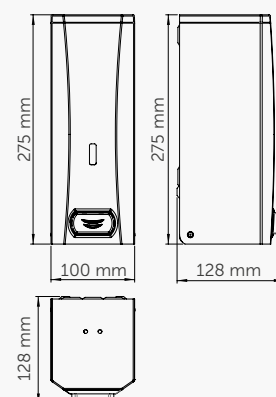

SOAP DISPENSERS

surface / push - button

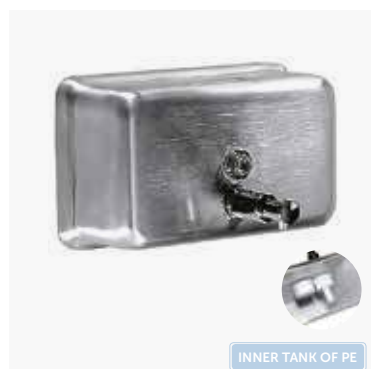

DJ0112C

capacity: 1,1 L

material: AISI 304 stainless steel

finish: **bright**

DJ0112CS

capacity: 1,1 L

material: AISI 304 stainless steel

finish: **satin**



DJ0111C

capacity: 1,1 L

material: AISI 304 stainless steel

finish: **bright**

DJ0111CS

capacity: 1,1 L

material: AISI 304 stainless steel

finish: **satin**



DJ0112C · DJ0112CS · DJ0111C · DJ0111CS COMPONENTS AND MATERIALS


- Stainless steel body
- Fully welded structure
- Frontal content viewer
- Lock and special key supplied
- Suitable for chlorine-free hand soap with a neutral pH
- Polyethylene inner tank
- Chromed brass piston
- Chrome-plated ABS thermoplastic valve

DJ0112C · DJ0112CS · DJ0111C · DJ0111CS TECHNICAL SPECIFICATIONS


DJ0112C · DJ0112CS · DJ0111C · DJ0111CS

| | |
|---------------------------------|--|
| Capacity | 1.1 L |
| Stainless steel thickness | 1 mm |
| Weight (empty) | 0.7 Kg |
| Recommended installation height | 10-15 cm to countertop |
| Suitable soaps | chlorine-free hand soap with a neutral pH |
| Quantity dispensed per pump | 1.1 ml |

DJ0112C · DJ0112CS

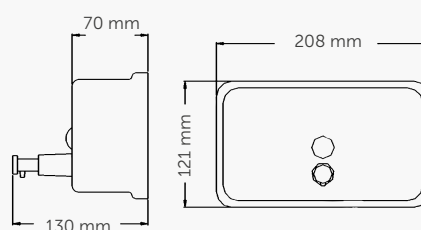


DJ0111C · DJ0111CS



SOAP DISPENSERS

surface / push - button

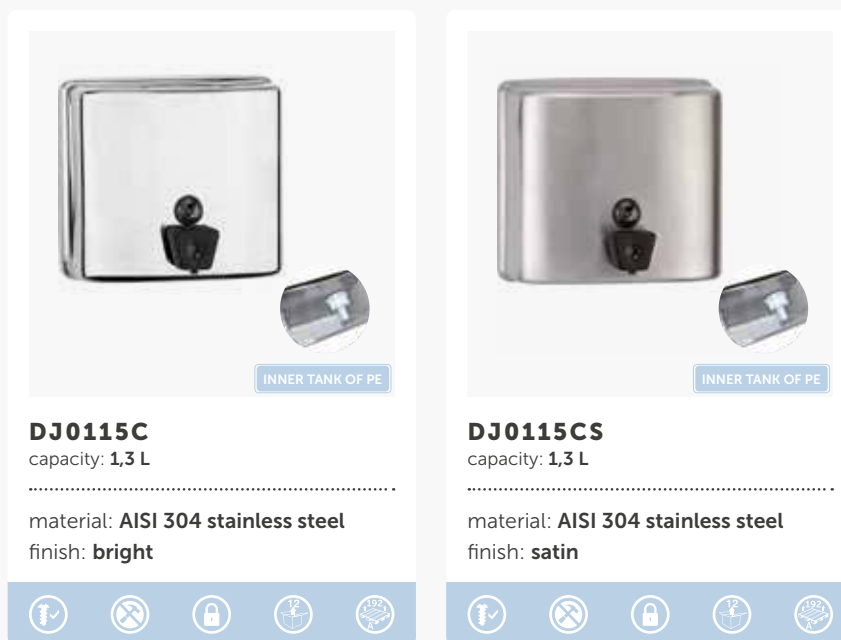


DJ0115C · DJ0115CS COMPONENTS AND MATERIALS

- Stainless steel body
- Fully welded structure
- Inner tank made of polyethylene to prevent oxidation
- Black ABS thermoplastic push-button
- Suitable for chlorine-free hand soap with a neutral pH

DJ0115C · DJ0115CS TECHNICAL SPECIFICATIONS

DJ0115C · DJ0115CS

| | |
|---------------------------------|---|
| Capacity | 1.3 L |
| Stainless steel thickness | 1 mm |
| Weight (empty) | 0.7 Kg |
| Recommended installation height | 10 –15 cm from countertop |
| Suitable soaps | Chlorine-free hand soap with neutral pH |
| Quantity dispensed per pump | 0.7 ml |

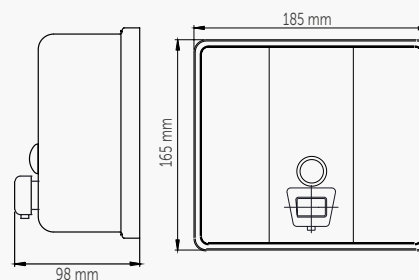

SOAP DISPENSERS

surface / push-button



DJ0010F

capacity: **1,1 L**

material: **ABS**

finish: **white / smoked**



DJ0020F

capacity: **1,1 L**

material: **ABS**

finish: **black / smoked**




DJ0010F · DJ0020F COMPONENTS AND MATERIALS

- ABS thermoplastic lid
- Standard mediclinics lock and key®
- ABS thermoplastic push-button
- SAN thermoplastic tank
- Corrosion-resistant anti-drip valve
- Suitable for chlorine-free hand soap with a neutral pH
- Suitable for disinfectant solutions, liquid soaps or hydroalcoholic gel


DJ0010F · DJ0020F TECHNICAL SPECIFICATIONS

| | |
|---------------------------------|--|
| Capacity | 1.1 L |
| Body thickness | 3 mm |
| Weight (empty) | 0.3 Kg |
| Recommended installation height | 15 - 20 cm to countertop |
| Suitable soaps | chlorine-free hand soap with a neutral pH, disinfectant solutions, liquid soaps or hydroalcoholic gel |
| Quantity dispensed per pump | 1.2 ml |

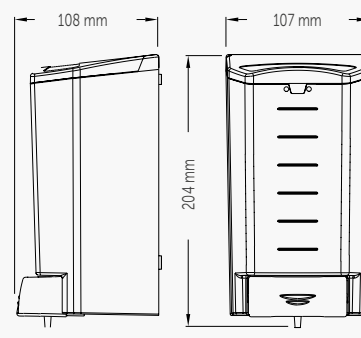

SOAP DISPENSERS

surface / lever




DJP0034
liquid soap

DJFP035
foam

DJSP036
spray

capacity: **1.5 L**
material: **AISI 304 stainless steel**
finish: **white epoxy**




DJP0034B
liquid soap

DJFP035B
foam

DJSP036B
spray

capacity: **1.5 L**
material: **AISI 304 stainless steel**
finish: **matte black epoxy**




DJP0034C
liquid soap

DJFP035C
foam

DJSP036C
spray

capacity: **1.5 L**
material: **AISI 304 stainless steel**
finish: **bright**



DJP0034CS
liquid soap

DJFP035CS
foam


DJSP036CS
spray

capacity: **1.5 L**
material: **AISI 304 stainless steel**
finish: **satin**

DJP0034 · DJFP035 · DJSP036 · DJP0034B · DJFP035B · DJSP036B · DJP0034C · DJFP035C · DJSP036C · DJP0034CS · DJFP035CS · DJSP036CS COMPONENTS AND MATERIALS

- Vandal resistant casing with lock
- Frontal content viewer
- Actuated by means of a stainless steel lever
- Corrosion-resistant anti-drip valve
- Inner tank, 2.5 mm thick of translucent polyethylene
- Easily removable inner tank
- Hinged cover for operator convenience and speed of service
- Opening on top with provided Mediclinics standard key
- Admits liquid soap or hydro-alcoholic gel
- Exclusive use for foam soap
- Exclusive use for disinfectant liquids

ONE SOAP DISPENSER,
3 POSSIBLE VALVES!



INTERCHANGABLES VALVES


liquid soap foam spray

RCDJ0031 V / RCDJF0032 V / RCDJS0033 V1

DJP0034 · DJFP035 · DJSP036 · DJP0034B · DJFP035B · DJSP036B · DJP0034C · DJFP035C · DJSP036C · DJP0034CS · DJFP035CS · DJSP036CS TECHNICAL SPECIFICATIONS

| | |
|--|---------------------------------------|
| Capacity | 1.5 L |
| Stainless steel thickness | 0.8 mm |
| Weight (empty) | 1.35 Kg |
| Recommended installation height | 15 – 20 cm from countertop |
| DJP0034 – DJP0034B – DJP0034C – DJP0034CS | |
| Suitable soaps | Liquid soaps and hydro-alcoholic gels |
| Quantity dispensed per pump | 1.5 ml |
| DJFP035 – DJFP035B – DJFP035C – DJFP035CS | |
| Suitable soaps | Foam soaps |
| Quantity dispensed per pump | 1 ml |
| DJSP036 – DJSP036B – DJSP036C – DJSP036CS | |
| Suitable soaps | Liquid disinfectant soaps |
| Quantity dispensed per pump | 0.8 ml |

Refillable tank

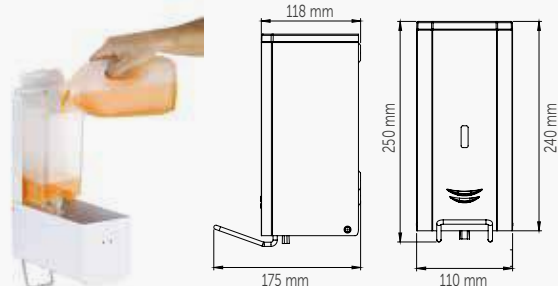

SOAP DISPENSERS

recessed / push button



DJE0010CS · DJT118 COMPONENTS AND MATERIALS

DJE0010CS

- Recessed soap dispenser made of AISI 304 stainless steel
- Chromed brass push button
- Inner plastic tank
- Lock with a supplied special key
- One-piece frontal part
- Frontal content viewer
- Anti-drip valve
- Suitable for chlorine-free hand soap with a neutral pH

DJT118

- Removable valve for refilling in the upper part
- Vandal-resistant polyethylene tank
- Lock and special key supplied
- Suitable for chlorine-free hand soap with a neutral pH of 5,5, disinfectant solutions, liquid soaps and hydroalcoholic gel
- Bright finish chromed brass piston and spout, 90 mm long
- Fixed push-button

DJE0010CS · DJT118 TECHNICAL SPECIFICATIONS


DJE0010CS

| | |
|---------------------------------|---|
| Stainless steel thickness | 0.8 mm |
| Weight (empty) | 1.4 Kg |
| Recommended installation height | 20-25 cm from countertop |
| Suitable soaps | Chlorine-free hand soap with neutral pH |
| Quantity dispensed per pump | 1.1 ml |


DJT118

| | |
|---------------------------------|---|
| Weight (empty) | 0.425 Kg |
| Recommended installation height | 10 –15 cm from countertop |
| Suitable soaps | Chlorine-free hand soap with neutral pH of 5.5, disinfectant solutions, liquid soaps and hydroalcoholic gel |
| Quantity dispensed per pump | 1 ml |
| Countertop hole | Ø 25 mm |
| Escutcheon | Ø 50 mm |
| Shank length | 118 mm |

DJE0010CS

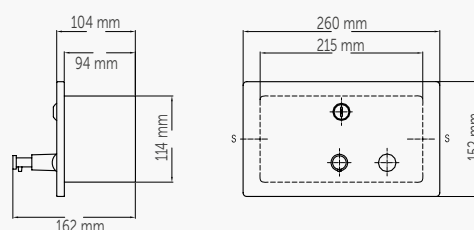





DJT118



SOAP DISPENSERS

Table


| | MODEL | OPERATION | | MATERIAL / FINISH | | | | | | | TANK | RECESSED |
|---|-----------------|-----------|--------|--------------------------------|--------------------------------------|---------------------------------|--------------------------------|---------------------|---------------|-----|----------------|----------|
| | | manual | autom. | AISI 304 stainless steel white | AISI 304 stainless steel matte black | AISI 304 stainless steel bright | AISI 304 stainless steel satin | chrome plated brass | aluminum /ABS | ABS | thermo-plastic | |
|  | DJ0037A-B-C-CS | | • | • | • | • | • | | | | • | |
| | DJF0038A-B-C-CS | | • | • | • | • | • | | | | • | |
| | DJ0160AS | | • | | | | | | • | | • | |
| | DJ0252AC | | • | | | | | • | | | • | • |
|  | DJ0031-B-C-CS | • | | • | • | • | • | | | | • | |
| | DJF0032-B-C-CS | • | | • | • | • | • | | | | • | |
| | DJS0033-B-C-CS | • | | • | • | • | • | | | | • | |
| | DJ0040 | • | | • | | | | | | | • | |
| | DJ0040B | | | | • | | | | | | • | |
| | DJ0040C | • | | | | • | | | | | • | |
| | DJ0040CS | • | | | | | • | | | | • | |
|  | DJ0112C | • | | | | • | | | | | • | |
| | DJ0112CS | • | | | | | • | | | | • | |
| | DJ0111C | • | | | | • | | | | | • | |
| | DJ0111CS | • | | | | | • | | | | • | |
| | DJ0115C | • | | | | • | | | | | • | |
| | DJ0115CS | • | | | | | • | | | | • | |
| | DJ0010F | • | | | | | | | | • | • | |
| | DJ0020F | • | | | | | | | | • | • | |
| | DJP0034-B-C-CS | • | | • | • | • | • | | | | • | |
| | DJFP035-B-C-CS | • | | • | • | • | • | | | | • | |
| | DJSP036-B-C-CS | • | | • | • | • | • | | | | • | |
|  | DJE0010CS | • | | | | | • | | | | • | • |
| | DJT118 | • | | | | | | • | | | • | • |

| Suitable soaps table | | | | |
|---|--------------|-----------------|--|------------------|
| Soap dispenser code | Type of pump | Spare part Code | Allowed soaps | Density (Kg/dm³) |
| DJ0031-B-C-CS DJP0034-B-C-CS DJ0037A-B-C-CS | SOAP PUMP | RCDJ0031-V | Liquid soaps and hydroalcoholic gels | 0.9 – 1.35 |
| DJF0032-B-C-CS DJFP035-B-C-CS DJF0038A-B-C-CS | FOAM PUMP | RCDJF0032-V | Foam soaps | 0.95 – 1.05 |
| DJS0033-B-C-CS DJSP036-B-C-CS | SPRAY PUMP | RCDJS0033-V1 | Liquid disinfectant soaps ⁽¹⁾ | 0.8 |
| (1) Maximum content of 85% of alcohol | | | | |

SOAP DISPENSERS

Table

| INSTALLATION | | CAPACITY | | | | | | | | TYPES OF SOAP | | | | MODEL |
|--------------|--------|----------|--------|-------|-------|--------|-----|--------|--------|---------------|--------------|------|-------|-----------------|
| Vert. | Horiz. | 1.6 L | 1.50 L | 1.4 L | 1.3 L | 1.10 L | 1 L | 0.95 L | 0.80 L | Neutral PH | Disinfectant | Foam | Spray | |
| • | | | | | | | • | | | • | | | | DJ0037A-B-C-CS |
| • | | | | | | | • | | | | | • | | DJF0038A-B-C-CS |
| • | | | | | | | | | • | • | • | | | DJ0160AS |
| • | | • | | | | | | | | • | | | | DJ0252AC |
| • | | | • | | | | | | | • | • | | | DJ0031-B-C-CS |
| • | | | • | | | | | | | | | • | | DJF0032-B-C-CS |
| • | | | • | | | | | | | | • | | • | DJS0033-B-C-CS |
| • | | | • | | | | | | | • | • | | | DJ0040 |
| • | | | • | | | | | | | • | | | | DJ0040B |
| • | | | • | | | | | | | • | • | | | DJ0040C |
| • | | | • | | | | | | | • | • | | | DJ0040CS |
| | • | | | | | • | | | | • | | | | DJ0112C |
| | • | | | | | • | | | | • | | | | DJ0112CS |
| • | | | | | | • | | | | • | | | | DJ0111C |
| • | | | | | | • | | | | • | | | | DJ0111CS |
| | • | | | | • | | | | | • | | | | DJ0115C |
| | • | | | | • | | | | | • | | | | DJ0115CS |
| • | | | | | | • | | | | • | • | | | DJ0010F |
| • | | | | | | • | | | | • | • | | | DJ0020F |
| • | | | • | | | | | | | • | • | | | DJP0034-B-C-CS |
| • | | | • | | | | | | | | | • | | DJFP035-B-C-CS |
| • | | | • | | | | | | | | | | • | DJSP036-B-C-CS |
| | • | | | • | | | | | | • | | | | DJE0010CS |
| • | | | | | | | | • | | • | • | | | DJT118 |

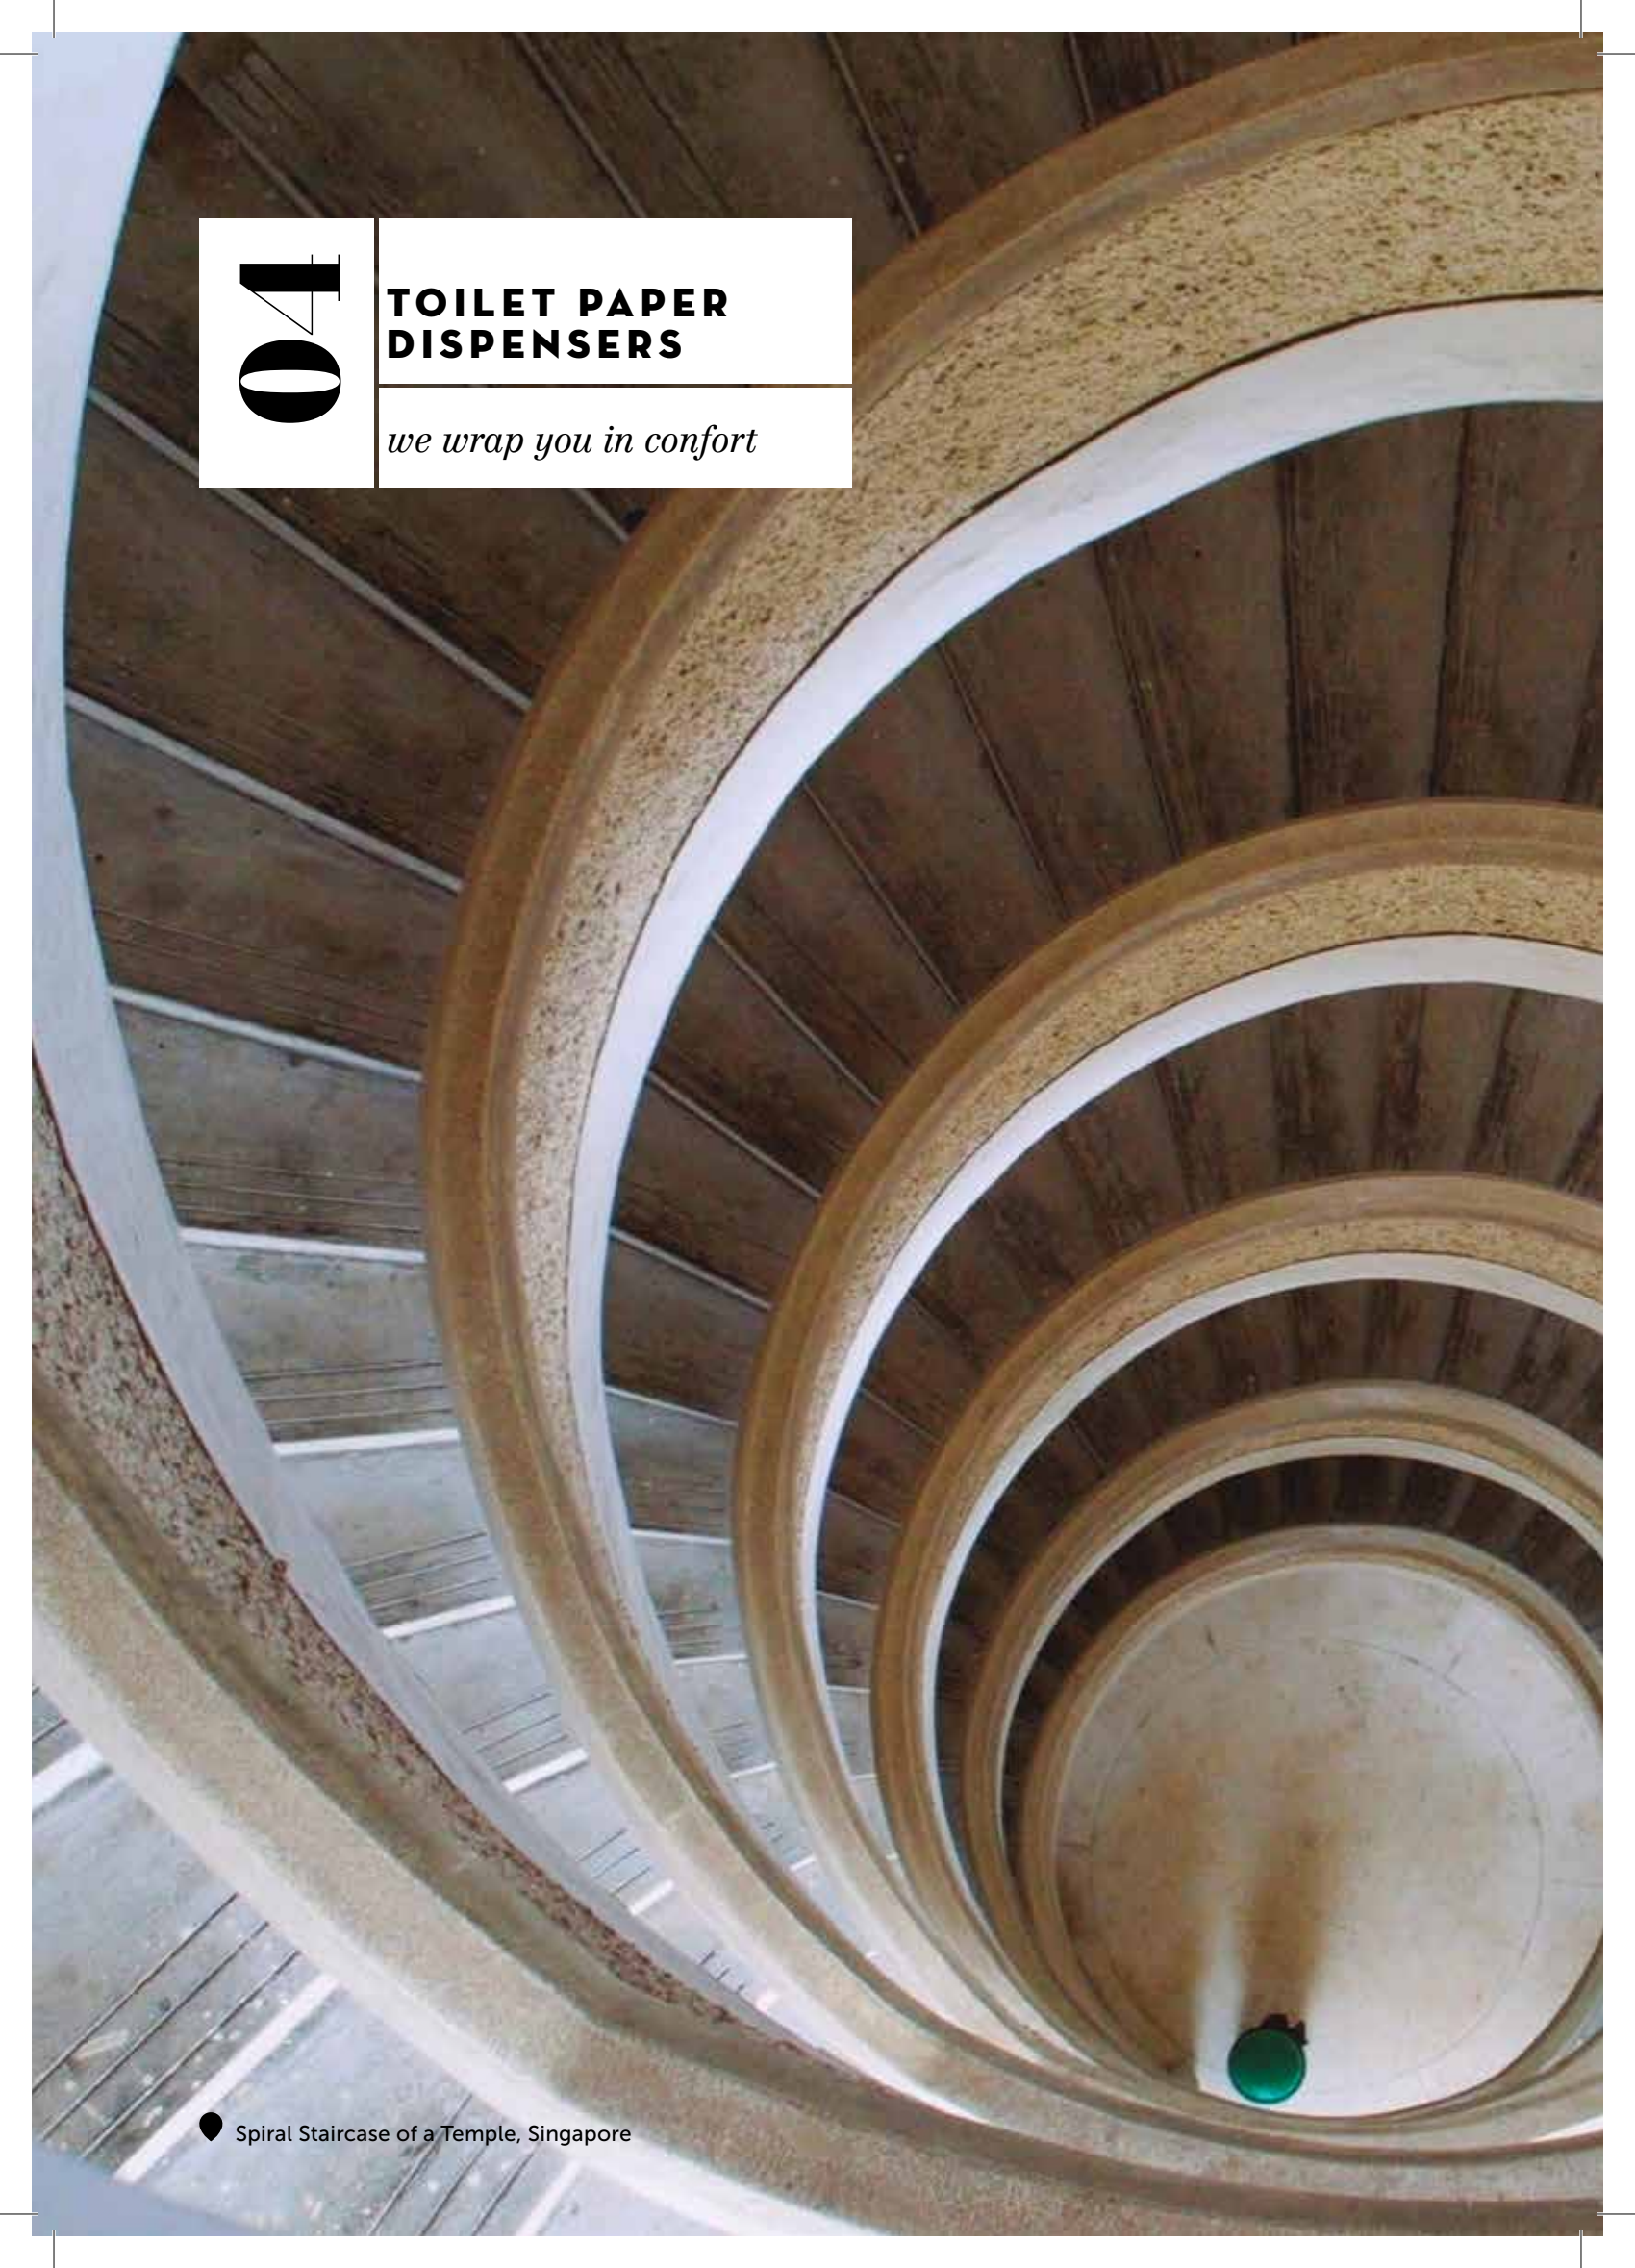

01

TOILET PAPER DISPENSERS

we wrap you in comfort




A modern bathroom interior with a white toilet. To the left, a window with a wooden frame shows a view of greenery outside, with three potted plants on the sill. On the wall above the toilet are two square wall-mounted dispensers. To the right of the toilet is a vertical wall-mounted dispenser. The floor is light-colored tile.

TOILET PAPER DISPENSERS

*For paper roll, standard roll
(2 or 3 units) or paper towels*

- Wide variety of toilet paper dispensers that are functional and straightforward to integrate into any toilet facility environment. Manufactured in various materials (steel, stainless steel, etc.) and in different finishes (white, black, bright, satin, etc.).
- Solutions that accept paper rolls of different diameters and different core sizes.
- They incorporate braking systems to optimise consumption
- Exterior sight glass for paper level
- Lock with special key for protection against vandalism

100



- Shaft with inertial anti-spin retainer
- Slot at the front for viewing content level
- Backplate with an anti-moisture support
- Lock with standard Mediclinics key

TOILET PAPER DISPENSERS

paper roll Ø 275 mm / 3 paper rolls



PR2787

capacity: max. roll Ø275 mm

material: steel

finish: white epoxy



PR2787B

capacity: max. roll Ø275 mm

material: steel

finish: matte black epoxy



PR2787C

capacity: max. roll Ø275 mm

material: AISI 304 stainless steel

finish: bright




PR2787CS

capacity: max. roll Ø275 mm

material: AISI 304 stainless steel

finish: satin

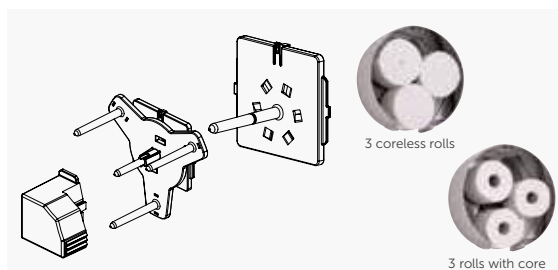

KIT 2789

optional shaft for 3 rolls

material: thermoplastic

finish: black


optional accessory available separately

PR2787 · PR2787B · PR2787C · PR2787CS COMPONENTS AND MATERIALS

- Stylish design suitable for every washroom
- One-piece body
- One-piece lid, which can be swung down for replenishment
- Backplate with multiple slots for easy installation
- Removable plastic shaft for standard Ø45 mm paper roll core with two different positions to allow different paper roll diameters (max. Ø275 mm)
- Shaft with inertial anti-spin retainer
- Slot at the front for viewing content level
- Backplate with anti-moisture support
- Lock with standard Mediclinics key

PR2787 · PR2787B · PR2787C · PR2787CS TECHNICAL SPECIFICATIONS

| | |
|---------------------------------|---------------------------|
| Thickness of body and lid | 0.8 mm |
| Weight (empty) | 1.70 Kg |
| Paper roll capacity | max. Ø275 mm |
| Toilet roll width | max. 115 mm |
| Toilet roll core | min. Ø45 mm |
| Recommended installation height | 65 - 75 cm at lower point |
| Installation height | 70 cm at lower point |



TOILET PAPER DISPENSERS

3 paper rolls / paper roll Ø 275 mm



PR0789

capacity: 3 rolls

material: steel

finish: white epoxy



PR0789C

capacity: 3 rolls

material: AISI 304 stainless steel

finish: bright




PR0789CS

capacity: 3 rolls

material: AISI 304 stainless steel

finish: satin

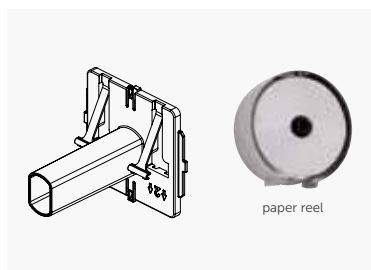

93910055MD

optional shaft for 1 roll

material: thermoplastic

finish: black

PR0789 · PR0789C · PR0789CS · 93910055MD COMPONENTS AND MATERIALS

PR0789 · PR0789C · PR0789CS

- One-piece body
- One-piece lid, which can be swung down for replenishment
- Backplate with an anti-moisture support
- Modular thermoplastic shaft allows three standard rolls to be fitted, core or coreless rolls
- The roll descends automatically once the previous one has been finished

- Slot at the front for viewing content level
- Lock with standard Mediclinics key



93910055MD

- Optional thermoplastic shaft for industrial roll with inertial anti-spin retainer to optimise dispensing of toilet paper. Replaces the original three standard roll shaft, allowing the use of industrial toilet rolls.


PR0789 · PR0789C · PR0789CS · 93910055MD TECHNICAL SPECIFICATIONS

PR0789 · PR0789C · PR0789CS

| | |
|-------------------------------------|---------------------------|
| Thickness of body and lid | 0.8 mm |
| Weight (empty) | 1.75 Kg |
| Toilet roll width | max. 115 mm |
| Toilet paper roll capacity | 3 u. |
| Toilet roll holder (optional shaft) | max. Ø275 mm |
| Toilet roll core | min. Ø45 mm |
| Recommended installation height | 65 - 75 cm at lower point |
| Installation height | 70 cm at lower point |



3 coreless rolls



3 rolls with core

TOILET PAPER DISPENSERS

3 units paper rolls / 2 units paper rolls



PR0781

capacity: 3 rolls

material: steel

finish: white epoxy



PR0781C

capacity: 3 rolls

material: AISI 304 stainless steel

finish: bright



PR0781CS

capacity: 3 rolls

material: AISI 304 stainless steel

finish: satin



PR0700CS

capacity: 2 rolls

material: AISI 304 stainless steel

finish: satin



PR0781 · PR0781C · PR0781CS · PR0700CS COMPONENTS AND MATERIALS

• PR0781 · PR0781C · PR0781CS

- One-piece body
- One-piece, weld-free lid
- Two slots in both sides that indicate the content level
- The toilet paper roll descends when the previous one has been finished by simply putting the hand through the side slot
- Lock with standard Mediclinics key

• PR0700CS

- One-piece body
- Laser welded swung lid
- The roll descend automatically, once the previous one has been finished
- System for optimizing the issue of paper
- Anti-vandal key lock

PR0781 · PR0781C · PR0781CS · PR0700CS TECHNICAL SPECIFICATIONS


PR0781 · PR0781C · PR0781CS

| | |
|---------------------------------|---------------------------|
| Thickness of body and lid | 0.8 mm |
| Weight (empty) | 1.3 Kg |
| Toilet paper roll capacity | 3 u. |
| Toilet paper roll | Ø105-125 mm |
| Recommended installation height | 65 - 75 cm at lower point |
| Installation height | 70 cm at lower point |


PR0700CS

| | |
|---------------------------------|----------------------|
| Thickness of body and lid | 0.8 mm |
| Weight (empty) | 2 Kg |
| Toilet paper roll capacity | 2 u. |
| Toilet paper roll | max. Ø135 mm |
| Recommended installation height | 65-75 at lower point |
| Installation height | 70 cm at lower point |

PR0781 / C / CS



PR0700CS



TOILET PAPER DISPENSERS

2 units paper rolls



PR2784

capacity: 2 rolls

material: **steel**

finish: **white epoxy**



PR2784B

capacity: 2 rolls

material: **steel**

finish: **matte black epoxy**



PR2784C

capacity: 2 rolls

material: **AISI 304 stainless steel**

finish: **bright**



PR2784CS

capacity: 2 rolls

material: **AISI 304 stainless steel**

finish: **satin**




PR2784 · PR2784B · PR2784C · PR2784CS COMPONENTS AND MATERIALS

- One-piece body
- One-piece, weld-free lid
- Two slots in both sides that indicate the content level
- Secondary paper roll bracket made in plastic allowing free movement of the roll in use. It can be set in two different positions, depending on the paper roll size
- The toilet paper roll descends when the previous one has been finished by simply putting the hand through the side slot
- Lock with standard Mediclinics key

PR2784 · PR2784B · PR2784C · PR2784CS TECHNICAL SPECIFICATIONS

| | |
|---------------------------------|---------------------------|
| Thickness of body and lid | 0.8 mm |
| Weight (empty) | 1.1 Kg |
| Toilet paper roll capacity | 2 u. |
| Toilet paper roll | max. Ø130 mm |
| Recommended installation height | 65 - 75 cm at lower point |
| Installation height | 70 cm at lower point |

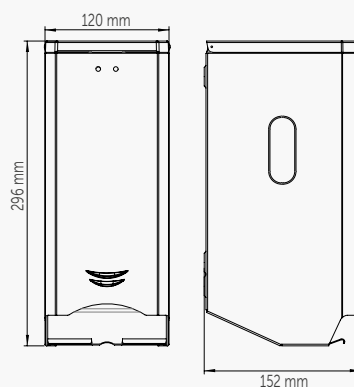

TOILET PAPER DISPENSERS

folded toilet tissue paper / seat covers



DTH100

capacity: 400 sheets (approx.)

material: steel

finish: white epoxy



DTH100C

capacity: 400 sheets (approx.)

material: AISI 304 stainless steel

finish: bright



DTH100CS

capacity: 400 sheets (approx.)

material: AISI 304 stainless steel

finish: satin



DCA100CS

capacity: 250 seat covers

material: AISI 304 stainless steel

finish: satin



DTH100 · DTH100C · DTH100CS · DCA100CS COMPONENTS AND MATERIALS

- One-piece body in AISI 304 stainless steel, with lid for refilling
- One-piece, weld-free lid
- Content viewer at the front
- Lock with standard Mediclinics key

DCA100CS

- One-piece, weld-free body
- Opening at the top to replace cover sheets box
- Easy pull opening system

DTH100 · DTH100C · DTH100CS · DCA100CS TECHNICAL SPECIFICATIONS


DTH100 · DTH100C · DTH100CS

| | |
|------------------------|---------------|
| Body and lid thickness | 0.8 mm |
| Towel capacity | 400 (approx.) |


DCA100CS

| | |
|------------------------|--------|
| Body and lid thickness | 0.8 mm |
| Seat cover capacity | 250 |

DTH100 · DTH100C · DTH100CS



DCA 100CS



TOILET PAPER DISPENSERS

sanitary bag dispenser



DBH100

capacity: 50 bags (approx)

material: steel

finish: white epoxy



DBH100C

capacity: 50 bags (approx)

material: AISI 304 stainless steel

finish: bright



DBH100CS

capacity: 50 bags (approx)

material: AISI 304 stainless steel

finish: satin



AI0920C

sanitary bag dispenser

material: AISI 304 stainless steel

finish: bright

AI0920CS

sanitary bag dispenser

material: AISI 304 stainless steel

finish: satin



DBH100 · DBH100C · DBH100CS · AI0920C · AI0920CS COMPONENTS AND MATERIALS

DBH100 · DBH100C · DBH100CS

- One-piece body in AISI 304 stainless steel

AI0920C · AI0920CS

- Suitable for feminine sanitary bag refill boxes of 136 x 91 x 24 mm

DBH100 · DBH100C · DBH100CS · AI0920C · AI0920CS TECHNICAL SPECIFICATIONS


DBH100 · DBH100C · DBH100CS

Body thickness 0.8 mm


AI0920C · AI0920CS

Body thickness 1 mm

DBH100 · DBH100C · DBH100CS







AI0920C · AI0920CS



TOILET PAPER DISPENSERS

Table

| | MODEL | MATERIAL / FINISH | | | | PAPER TYPE | | | |
|---|----------|-------------------|-------------------------|---------------------------------|--------------------------------|------------|---------|-------------------|---------|
| | | Steel white epoxy | Steel matte black epoxy | AISI 304 Stainless steel bright | AISI 304 Stainless steel Satin | STANDARD | | ROLL (INDUSTRIAL) | |
| | | | | | | CAPACITY | | CAPACITY | |
| | | | | | | 2 rolls | 3 rolls | Ø230 mm | Ø275 mm |
|  | PR2783 | • | | | | | | • | |
| | PR2783B | | • | | | | | • | |
| | PR2783C | | | • | | | | • | |
| | PR2783CS | | | | • | | | • | |
|  | PR2787 | • | | | | | | | • |
| | PR2787B | | • | | | | | | • |
| | PR2787C | | | • | | | | | • |
| | PR2787CS | | | | • | | | | • |
|  | PR0789 | • | | | | | • | | • |
| | PR0789C | | | • | | | • | | • |
| | PR0789CS | | | | • | | • | | • |
|  | PR0700CS | | | | • | • | | | |
| | PR0781 | • | | | | | • | | |
| | PR0781C | | | • | | | • | | |
| | PR0781CS | | | | • | | • | | |
| | PR2784 | • | | | | • | | | |
| | PR2784B | | • | | | • | | | |
| | PR2784C | | | • | | • | | | |
| | PR2784CS | | | | • | • | | | |
|  | DCA100CS | | | | • | | | | |
|  | DTH100 | • | | | | | | | |
| | DTH100C | | | • | | | | | |
| | DTH100CS | | | | • | | | | |
|  | DBH100 | • | | | | | | | |
| | DBH100C | | | • | | | | | |
| | DBH100CS | | | | • | | | | |
| | AI0920C | | | • | | | | | |
| | AI0920CS | | | | • | | | | |

TOILET PAPER DISPENSERS

Table

| PAPER TYPE | | | SHAPE | | LOCK WITH KEY | SUITABLE FOR | | | | | MODEL |
|-------------------|-----------------|---------------|-------------|-------|---------------|-------------------------------------|---|---------------------------------|--|---------------------------------------|----------|
| Toilet seat cover | Sanitary towels | Sanitary Bags | Rectangular | Round | | Gyms and Sport centers and similars | Hospitals and Health Centres facilities edery care homes and similars | Hotels and other accommo-dation | Offices, official or-ganizations, schools and similars | Airports, shopping malls and similars | |
| | | | | • | • | | • | • | • | | PR2783 |
| | | | | • | | | • | • | • | | PR2783B |
| | | | | • | • | • | • | • | • | | PR2783C |
| | | | | • | • | • | • | • | • | | PR2783CS |
| | | | | • | • | | • | • | • | • | PR2787 |
| | | | | • | | | • | • | • | • | PR2787B |
| | | | | • | • | • | • | • | • | • | PR2787C |
| | | | | • | • | • | • | • | • | • | PR2787CS |
| | | | | • | • | | • | • | • | | PR0789 |
| | | | | • | • | • | • | • | • | | PR0789C |
| | | | | • | • | • | • | • | • | | PR0789CS |
| | | | • | | • | • | • | • | • | | PR0700CS |
| | | | • | | • | | • | • | • | | PR0781 |
| | | | • | | • | • | • | • | • | | PR0781C |
| | | | • | | • | • | • | • | • | | PR0781CS |
| | | | • | | • | | • | • | • | | PR2784 |
| | | | • | | • | | • | • | • | | PR2784B |
| | | | • | | • | • | • | • | • | | PR2784C |
| | | | • | | • | • | • | • | • | | PR2784CS |
| • | | | • | | | • | • | • | • | • | DCA100CS |
| | • | | • | | • | | • | • | • | | DTH100 |
| | • | | • | | • | • | • | • | • | | DTH100C |
| | • | | • | | • | • | • | • | • | | DTH100CS |
| | | • | • | | | | • | • | • | • | DBH100 |
| | | • | • | | | | • | • | • | • | DBH100C |
| | | • | • | | | | • | • | • | • | DBH100CS |
| | | • | • | | | | | • | • | • | AI0920C |
| | | • | • | | | | | • | • | • | AI0920CS |



PAPER TOWEL DISPENSERS

our goal is to win your trust



A photograph of a modern public restroom. The walls are made of large, rectangular beige stone tiles. On the left, two stainless steel urinals are mounted on the wall. In the center, a stainless steel paper towel dispenser is mounted on the wall, with a roll of white paper towel partially dispensed. Below the dispenser is a stainless steel trash can. To the right, a stainless steel sink with a modern faucet is mounted on the wall, with a mirror above it. A small, square stainless steel soap dispenser is also mounted on the wall next to the sink. The floor is made of light-colored tiles. The lighting is bright and even.

PAPER TOWEL DISPENSERS

For all types of standard paper towel: C / Z or roll towel

- Wide variety of functional paper towel dispensers that are easy to integrate into any toilet facility environment. Manufactured in various materials (steel, stainless steel, etc.) and in different finishes (white, black, bright, satin, etc.).
- For wall or recessed mounting.
- Exterior sight glass for paper level
- Lock with special key for protection against vandals
- Suitable for high traffic areas

PAPER TOWEL DISPENSERS

towels with C/Z folds / wall mounted



DT2106

capacity: 400-600 C/Z towels

material: **steel**

finish: **white epoxy**



DT2106B

capacity: 400-600 C/Z towels

material: **steel**

finish: **matte black epoxy**



DT2106C

capacity: 400-600 C/Z towels

material: **AISI 304 stainless steel**

finish: **bright**



DT2106CS

capacity: 400-600 C/Z towels

material: **AISI 304 stainless steel**

finish: **satin**




DT2106 · DT2106B · DT2106C · DT2106CS COMPONENTS AND MATERIALS

- Fully welded structure
- The design of the paper outlet prevents the paper from tearing
- Door fixed to the body with two rivets, allowing it to be swung open for paper replacement
- Front lock with a special key provided for an easy paper replacement
- Content viewer on the front
- Back-plate with multiple slots for easy installation
- Lock with standard Mediclinics key

DT2106 · DT2106B · DT2106C · DT2106CS TECHNICAL SPECIFICATIONS

| | |
|---------------------------------|----------------------------|
| Body and lid thickness | 0.8 mm |
| Weight (empty) | 1.8 Kg |
| Towels | max. 260 x 100 mm |
| Towels capacity folded in C/Z | 400 - 600 u |
| Recommended installation height | 130-160 cm at lower point |
| Installation height | 85 - 120 cm at lower point |

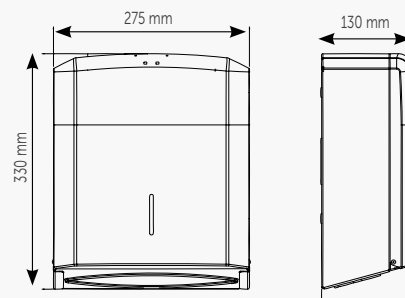

PAPER TOWEL DISPENSERS

roll / wall mounted



DT0303

capacity: max. roll Ø250 mm

material: steel

finish: white epoxy



DT0303C

capacity: max. roll Ø250 mm

material: AISI 304 stainless steel

finish: bright



DT0303CS

capacity: max. roll Ø250 mm

material: AISI 304 stainless steel

finish: satin




DT0303 · DT0303C · DT0303CS COMPONENTS AND MATERIALS

- Drainage holes in the lower part to prevent eventual accumulation of water inside the dispenser
- Sliding access door with a recessed grip for opening and closing
- Thermoplastic body for roll of paper towels
- System for optimizing the issue of paper
- Front sliding door which allows it to be mounted under shelves and makes it easy to replenish the towels
- Jagged edge on dispenser to facilitate tearing of paper
- Lock with standard Mediclinics key
- Suitable for food handling establishments

DT0303 · DT0303C · DT0303CS TECHNICAL SPECIFICATIONS

| | |
|---------------------------------|----------------------------|
| Body and lid thickness | 0.8 mm |
| Weight (empty) | 3.1 Kg |
| Paper reel | max. Ø250 mm |
| Height of paper roll | 270 mm |
| Recommended installation height | 130-160 cm at lower point |
| Installation height | 85 - 120 cm at lower point |

DT0303 · DT0303C · DT0303CS

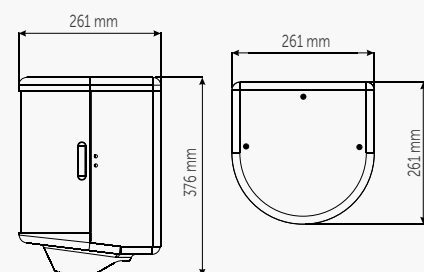


PAPER TOWEL DISPENSERS

recessed - wall mounted / roll

MANUAL

NEW

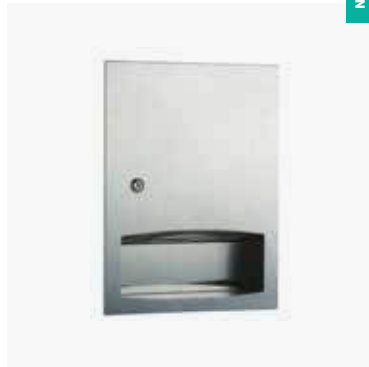

DTE0020CS

capacity: 200-400 C/Z towels

material: AISI 304 stainless steel
finish: satin



MANUAL

NEW



DTP025CS

capacity: roll paper Ø220 mm

material: AISI 304 stainless steel
finish: satin



SEMI-AUTOMATIC

NEW



DT0208ACS

capacity: roll paper Ø170 mm

material: AISI 304 stainless steel
finish: satin



DTE0020CS · DTP025CS · DT0208ACS COMPONENTS AND MATERIALS

- **DTE0020CS**
 - Fully welded structure
 - One-piece frame
 - Towel tray with bound edging to dispense towels without tearing
 - Lock and special key supplied
- **DTP025CS**
 - Operated by means of a lever. According to the lever stroke, paper of 64, 102 or 127 mm
 - The design of the paper outlet prevents the paper from tearing
 - Automatic transfer mechanism shall dispense towels from stub roll before starting new roll
 - Door shall be attached to cabinet at side with a full length multi-staked stainless steel piano hinge
- Front lock with a special key provided permanently affixed to the inside rear panel to illustrate correct paper loading, length preset pin selection and stub roll transfer
- **DT0208ACS**
 - Semi-automatic operation. The user pulls the paper, down tears it off and automatically a new service paper is dispensed
 - The cover shall be attached to the back with two pivots and shall be held closed with a tumbler key lock
 - Structural assembly of all components shall be of welded construction
 - An operation label shall be provided permanently affixed to the inside rear panel to illustrate the correct paper loading, length preset pin selection






DTE0020CS · DTP025CS · DTP0208ACS TECHNICAL SPECIFICATIONS

| DTE0020CS | | DT0208ACS | | <div>DT0208ACS</div>  |
|----------------------------------|----------------------------|---------------------------------|----------------------------|--|
| Body and lid thickness | 0.8 mm | Body and lid thickness | 0.8 mm | |
| Weight (empty) | 4.2 Kg | Paper roll diameter | max. Ø170 mm | |
| Capacity of folded towels in C/Z | 200 - 400 units | Dispensed paper towel width | 205 mm | |
| Recommended installation height | 115-145 cm at lower point | Recommended installation height | 130-160 cm at lower point | |
| Installation height | 70 - 105 cm at lower point | Installation height | 85 - 120 cm at lower point | |

| DTP025CS | | DTE0020CS | | DTP025CS | | <div>DT0208ACS</div>  |
|---------------------------------|---------------------------|---|--|---|--|--|
| Body and lid thickness | 0.8 mm |  | |  | | |
| Weight (empty) | 4.5 Kg | | | | | |
| Main paper roll diameter | max. Ø220 mm | | | | | |
| Secondary paper roll diameter | max. Ø100 mm | | | | | |
| Dispensed paper towel width | from 200 to 230 mm | | | | | |
| Recommended installation height | 115-145 cm at lower point | | | | | |
| Installation height | 70-105 cm at lower point | | | | | |

PAPER TOWEL DISPENSERS

Table

| | MODEL | MATERIAL / FINISH | | | | INSTALLATION | |
|---|-----------|-------------------|-------------------------|---------------------------------|--------------------------------|--------------|----------|
| | | Steel White Epoxy | Steel Matte Black Epoxy | AISI 304 Stainless steel Bright | AISI 304 Stainless steel Satin | Wall Mounted | Recessed |
|  | DT2106 | • | | | | • | |
| | DT2106B | | • | | | • | |
| | DT2106C | | | • | | • | |
| | DT2106CS | | | | • | • | |
|  | DT0303 | • | | | | • | |
| | DT0303C | | | • | | • | |
| | DT0303CS | | | | • | • | |
|    | DTE0020CS | | | | • | | • |
| | DTP025CS | | | | • | • | |
| | DT0208ACS | | | | • | • | |

PAPER TOWEL DISPENSERS

Table

| PAPER TYPE/CAPACITY | | | | LOCK WITH KEY | SUITABLE FOR | | | | | MODEL |
|---------------------|-----------|----------|----------|---------------|---|--|---------------------------------------|---|--|-----------|
| C/Z folds | | ROLL | | | Gyms Sports centres and similars | Hospitals and Health Centres fa- cilities edery care homes and similars | Hotels Other accommo- dation | Offices, official or- ganizations, schools and similars | Airports, shopping malls and smiliars | |
| 200-400 units | 400-600 u | Ø 200 mm | Ø 250 mm | | | | | | | |
| | ● | | | ● | | ● | ● | ● | ● | DT2106 |
| | | | | ● | | ● | ● | ● | ● | DT2106B |
| | ● | | | ● | ● | ● | ● | ● | ● | DT2106C |
| | ● | | | ● | ● | ● | ● | ● | ● | DT2106CS |
| | | | ● | ● | | ● | | | | DT0303 |
| | | | ● | ● | ● | ● | | | | DT0303C |
| | | | ● | ● | ● | ● | | | | DT0303CS |
| ● | | | | ● | ● | ● | ● | ● | | DTE0020CS |
| | | ● | | ● | ● | ● | ● | ● | ● | DTP025CS |
| | | ● | | ● | ● | ● | ● | ● | ● | DT0208AS |

06

WASTE RECEPTACLES AND BINS

*your space always
clean and tidy*



A photograph of a modern public restroom. The walls are covered in large, rectangular stone tiles. On the left, there are two large, wall-mounted stainless steel paper towel dispensers. Below them are three rectangular mirrors. In the center, there is a long, white, rectangular sink with three faucets. To the right of the sink, there are three stainless steel urinals mounted on the wall. In the foreground, there are two large, stainless steel waste bins. The floor is made of large, dark stone tiles. The ceiling is a dark, perforated metal grid.

WASTE RECEPTACLES AND BINS

Quality, design, versatility and very durable for the daily management of waste.

- Wide range of waste bins and interior containers, manufactured in various materials (steel, stainless steel, etc.) and in different finishes (white, black, bright, satin, etc.), with a modern and versatile design that makes them very easy to integrate into any toilet facility environment.
- Perfect for placing in common areas, such as offices, halls, sports facilities, shops, airports, shopping centres, etc.
- Models for installation on legs and/or on the wall (wall mounted or recessed)
- Functional design for easy maintenance
- Universal units suitable for management of nearly all types of waste

WASTE RECEPTACLES AND BINS

bins / with self-closing lid



PP0080

PP0080
capacity: 80 L

PP065
capacity: 65 L

material: **steel**
finish: **white epoxy**



PP0080C

PP0080C
capacity: 80 L

PP065C
capacity: 65 L

material: **AISI 304 stainless steel**
finish: **bright**



PP0080CS

PP0080CS
capacity: 80 L

PP065CS
capacity: 65 L

material: **AISI 304 stainless steel**
finish: **satin**



PP0080 · PP065 · PP0080C · PP065C · PP0080CS · PP065CS COMPONENTS AND MATERIALS

- Manually activated self-closing lid
- Spring for automatic return and two rubber silencers
- Retaining system on the inside of the body to secure the disposable waste bag
- Four black thermoplastic feet to keep the bottom of the bin clear of any moisture
- Can be either free-standing or wall-mounted


PP0080 · PP065 · PP0080C · PP065C · PP0080CS · PP065CS TECHNICAL SPECIFICATIONS

PP0080 · PP0080C · PP0080CS

| | |
|------------------|--------|
| Capacity | 80 L |
| L1 | 823 mm |
| Body thickness | 1 mm |
| Thickness of top | 1.2 mm |
| Lid thickness | 1 mm |
| Weight (empty) | 9.8 Kg |

PP065 · PP065C · PP065CS

| | |
|------------------|--------|
| Capacity | 65 L |
| L1 | 673 mm |
| Body thickness | 1 mm |
| Thickness of top | 1.2 mm |
| Lid thickness | 1 mm |
| Weight (empty) | 8.4 Kg |

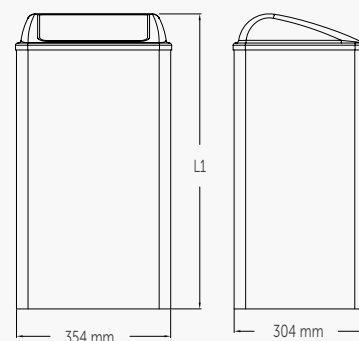

WASTE RECEPTACLES AND BINS

bins / open



PP1080

PP1080

capacity: 80 L

PP1065

capacity: 65 L

material: steel

finish: white epoxy



PP1065C

PP1080C

capacity: 80 L

PP1065C

capacity: 65 L

material: AISI 304 stainless steel

finish: bright



PP1080CS

PP1080CS

capacity: 80 L

PP1065CS

capacity: 65 L

material: AISI 304 stainless steel

finish: satin



PP1080 · PP1065 · PP1080C · PP1065C · PP1080CS · PP1065CS COMPONENTS AND MATERIALS

- Retaining system on the inside of the body to secure the disposable waste bag
- Four black thermoplastic feet to keep the bottom of the bin clear of any moisture
- Can be either free-standing or wall-mounted


PP1080 · PP1065 · PP1080C · PP1065C · PP1080CS · PP1065CS TECHNICAL SPECIFICATIONS

PP1080 · PP1080C · PP1080CS

| | |
|----------------|--------|
| Capacity | 80 L |
| L1 | 755 mm |
| Body thickness | 1 mm |
| Weight (empty) | 8.4 Kg |

PP1065 · PP1065C · PP1065CS

| | |
|----------------|--------|
| Capacity | 65 L |
| L1 | 605 mm |
| Body thickness | 1 mm |
| Weight (empty) | 7 Kg |

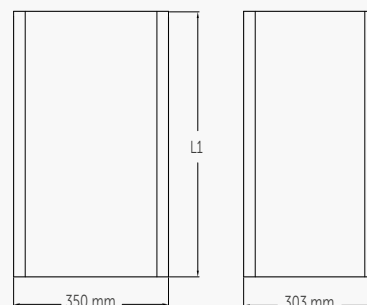

WASTE RECEPTACLES AND BINS

bins / open



PPA2279
capacity: 25 L

material: **steel**
finish: **white epoxy**



PPA2279B
capacity: 25 L

material: **steel**
finish: **matte black epoxy**



PPA2279C
capacity: 25 L

material: **AISI 304 stainless steel**
finish: **bright**



PPA2279CS
capacity: 25 L

material: **AISI 304 stainless steel**
finish: **satin**




PPA2279 · PPA2279B · PPA2279C · PPA2279CS COMPONENTS AND MATERIALS

- Can be either free-standing or wall-mounted
- Back-plate with 4 slot holes for wall mounting
- With inner swing plastic ring in black PP, to secure the disposable waste bag




PPA2279 · PPA2279B · PPA2279C · PPA2279CS TECHNICAL SPECIFICATIONS

| | |
|----------------|--------|
| Capacity | 25 L |
| Body thickness | 0.8 mm |
| Weight (empty) | 3.7 Kg |

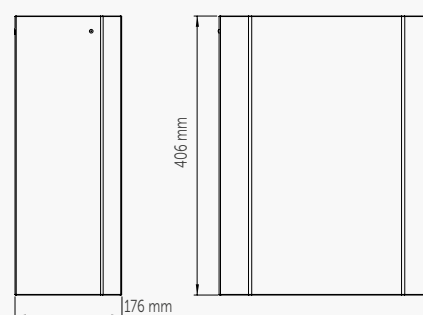


WASTE RECEPTACLES AND BINS

*bins / sanitary napkin containers
wall mounted with lid*




PPE0010CS
capacity: 14,2 L

material: AISI 304 stainless steel
finish: satin




PP0006*
capacity: 6 L

material: steel
finish: white epoxy



PP0006C*
capacity: 6 L

material: AISI 304 stainless steel
finish: bright



PP0006CS*
capacity: 6 L

material: AISI 304 stainless steel
finish: satin

*These models are available with bag-holder

PPE0010CS · PP0006 · PP0006C · PP0006CS COMPONENTS AND MATERIALS

PPE0010CS

- With a self-closing cover and key to remove the waste bin
- Inner thermoplastic bin

PP0006 · PP0006C · PP0006CS

- Free-standing or wall-mounted by two screws on the back
- The lid protrudes 3,5 mm from the body to facilitate opening. Fixed to the body by two shafts that articulate the lid



PPE0010CS · PP0006 · PP0006S · PP0006S · PP0006CS TECHNICAL SPECIFICATIONS

PPE0010CS


| | |
|------------------------|--------|
| Capacity | 14,2 L |
| Body and lid thickness | 0.8 mm |

PP0006 · PP0006C · PP0006CS

| | |
|------------------------|--------|
| Capacity | 6 L |
| Body and lid thickness | 0.8 mm |
| Weight (empty) | 3.7 Kg |



PP0006 · PP0006C · PP0006CS



WASTE RECEPTACLES AND BINS

pedal-operated bins / circular



PP1321
capacity: 20 L



PP1312
capacity: 12 L



PP1305
capacity: 5 L



PP1303
capacity: 3 L



material: **steel**
finish: **white epoxy**



PP1321C
capacity: 20 L



PP1312C
capacity: 12 L



PP1305C
capacity: 5 L



PP1303C
capacity: 3 L



material: **AISI 430 steel**
finish: **bright**



PP1321CS
capacity: 20 L



PP1312CS
capacity: 12 L



PP1305CS
capacity: 5 L



PP1303CS
capacity: 3 L



material: **AISI 430 steel**
finish: **satin**

PP1321/C/CS · PP1312/C/CS · PP1305/C/CS · PP1303/C/CS COMPONENTS AND MATERIALS

- Circular body
- Quiet and odour-preventing lid
- Inner polypropylene bin with metal handle
- Handle in the upper part to facilitate the transport of the receptacle
- Black thermoplastic non-slip pedal
- Black plastic non-slip base which keeps the bottom of the receptacle moisture-free

PP1321/C/CS · PP1312/C/CS · PP1305/C/CS · PP1303/C/CS TECHNICAL SPECIFICATIONS

PP1321 · PP1321C · PP1321CS

| | |
|----------|--------|
| Capacity | 20 L |
| Weight | 5.2 Kg |
| L1 | 600 mm |
| LØ | 250 mm |

PP1305 · PP1305C · PP1305CS


| | |
|----------|--------|
| Capacity | 5 L |
| Weight | 1.1 Kg |
| L1 | 325 mm |
| LØ | 210 mm |

PP1312 · PP1312C · PP1312CS

| | |
|----------|--------|
| Capacity | 12 L |
| Weight | 3.4 Kg |
| L1 | 390 mm |
| LØ | 250 mm |




PP1303 · PP1303C · PP1303CS

| | |
|----------|--------|
| Capacity | 3 L |
| Weight | 0.9 Kg |
| L1 | 260 mm |
| LØ | 170 mm |

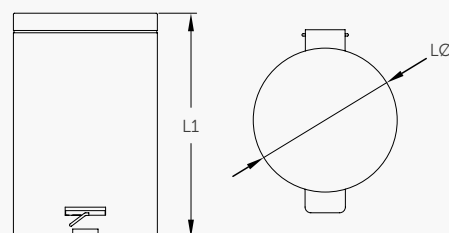



WASTE RECEPTACLES AND BINS

bins / table

| MODEL | | SURFACE AREA | | MATERIAL / FINISH | | | | CAPACITY | | | | SUITABLE FOR | | | | |
|---|-----------|------------------|------|-------------------|-------------------------|----------------------------|---------------------------|----------|------|------|--------|---|--|---------------------------------------|------------------------------------|--------------------------------|
| | | Self-closing lid | Open | Steel white epoxy | Steel matte black epoxy | 304 Stainless steel bright | 304 Stainless steel satin | 80 L | 65 L | 25 L | 14,2 L | Offices, official organizations, schools and similars | Hospitals and Health Centres facilities, elderly care homes and similars | Airports, shopping malls and similars | Gyms and Sport centres and similar | Hotels and other accommodation |
|  | PP0080 | ● | | ● | | | | ● | | | | ● | ● | ● | | |
| | PP0080C | ● | | | | ● | | ● | | | | ● | ● | ● | ● | |
| | PP0080CS | ● | | | | | ● | ● | | | | ● | ● | ● | ● | |
| | PP0065 | ● | | ● | | | | | ● | | | ● | ● | ● | | ● |
| | PP0065C | ● | | | | ● | | | ● | | | ● | ● | ● | ● | ● |
| | PP0065CS | ● | | | | | ● | | ● | | | ● | ● | ● | ● | ● |
|  | PPA2279 | | ● | ● | | | | | | ● | | ● | ● | ● | | ● |
| | PPA2279B | | ● | | ● | | | | | ● | | ● | ● | ● | | ● |
| | PPA2279C | | ● | | | ● | | | | ● | | ● | ● | ● | ● | ● |
| | PPA2279CS | | ● | | | | ● | | | ● | | ● | ● | ● | ● | ● |
|  | PP1080 | | ● | ● | | | | ● | | | | ● | ● | ● | | |
| | PP1080C | | ● | | | ● | | ● | | | | ● | ● | ● | ● | |
| | PP1080CS | | ● | | | | ● | ● | | | | ● | ● | ● | ● | |
| | PP1065 | | ● | ● | | | | | ● | | | ● | ● | ● | | ● |
| | PP1065C | | ● | | | ● | | | ● | | | ● | ● | ● | ● | ● |
| | PP1065CS | | ● | | | | ● | | ● | | | ● | ● | ● | ● | ● |
| | PPE0010CS | ● | | | | | ● | | | | ● | ● | ● | | | ● |

WASTE RECEPTACLES AND BINS

other receptacles / table

| MODEL | | LID OPEN- ING | | MATERIAL / FINISH | | | | | | CAPACITY | | | | | SUITABLE FOR | | | | | MODEL |
|---|-----------|------------------|--------|-------------------|---------------------------------|--------------------------------|----------------------------|-----------------------|----------------------|----------|------|-----|-----|-----|---|--|---------------------------------------|------------------------------------|-------------------------------|-----------|
| | | By pedal | Manual | Steel epoxy white | AISI 304 stainless steel bright | AISI 304 stainless steel satin | AISI 430 steel epoxy white | AISI 430 steel bright | AISI 430 steel satin | 20 L | 12 L | 6 L | 5 L | 3 L | Offices, official organizations, schools and similars | Hospitals and Health Centres facilities, edery care homes and similars | Airports, shopping malls and similars | Gyms and Sport centres and similar | Hotels and other accomodation | |
|  | PP0006 | | ● | ● | | | | | | | | ● | | | ● | ● | ● | | ● | PP0006 |
| | PP0006C | | ● | | ● | | | | | | | ● | | | ● | ● | ● | ● | ● | PP0006C |
| | PP0006CS | | ● | | | ● | | | | | | ● | | | ● | ● | ● | ● | ● | PP0006CS |
|  | PP1303 | ● | | | | | ● | | | | | | | ● | ● | ● | ● | | ● | PP1303 |
| | PP1303C | ● | | | | | | ● | | | | | | ● | ● | ● | ● | ● | ● | PP1303C |
| | PP1303CS | ● | | | | | | | ● | | | | | ● | ● | ● | ● | ● | ● | PP1303CS |
| | PP1305 | ● | | | | | ● | | | | | ● | | | ● | ● | ● | | ● | PP1305 |
| | PP1305C | ● | | | | | | ● | | | | ● | | | ● | ● | ● | ● | ● | PP1305C |
| | PP1305CS | ● | | | | | | | ● | | | ● | | | ● | ● | ● | ● | ● | PP1305CS |
| | PP1312 | ● | | | | | ● | | | | ● | | | | ● | ● | ● | | ● | PP1312 |
| | PP1312C | ● | | | | | | ● | | | ● | | | | ● | ● | ● | ● | ● | PP1312C |
| | PP1312CS | ● | | | | | | | ● | | ● | | | | ● | ● | ● | ● | ● | PP1312CS |
| | PP13121 | ● | | | | | ● | | | ● | | | | | ● | ● | ● | | ● | PP13121 |
| | PP13121C | ● | | | | | | ● | | ● | | | | | ● | ● | ● | ● | ● | PP13121C |
| | PP13121CS | ● | | | | | | | ● | ● | | | | | ● | ● | ● | ● | ● | PP13121CS |




20

MULTI-PURPOSE CABINETS

*combined for better
organization*



Bilbao, Spain

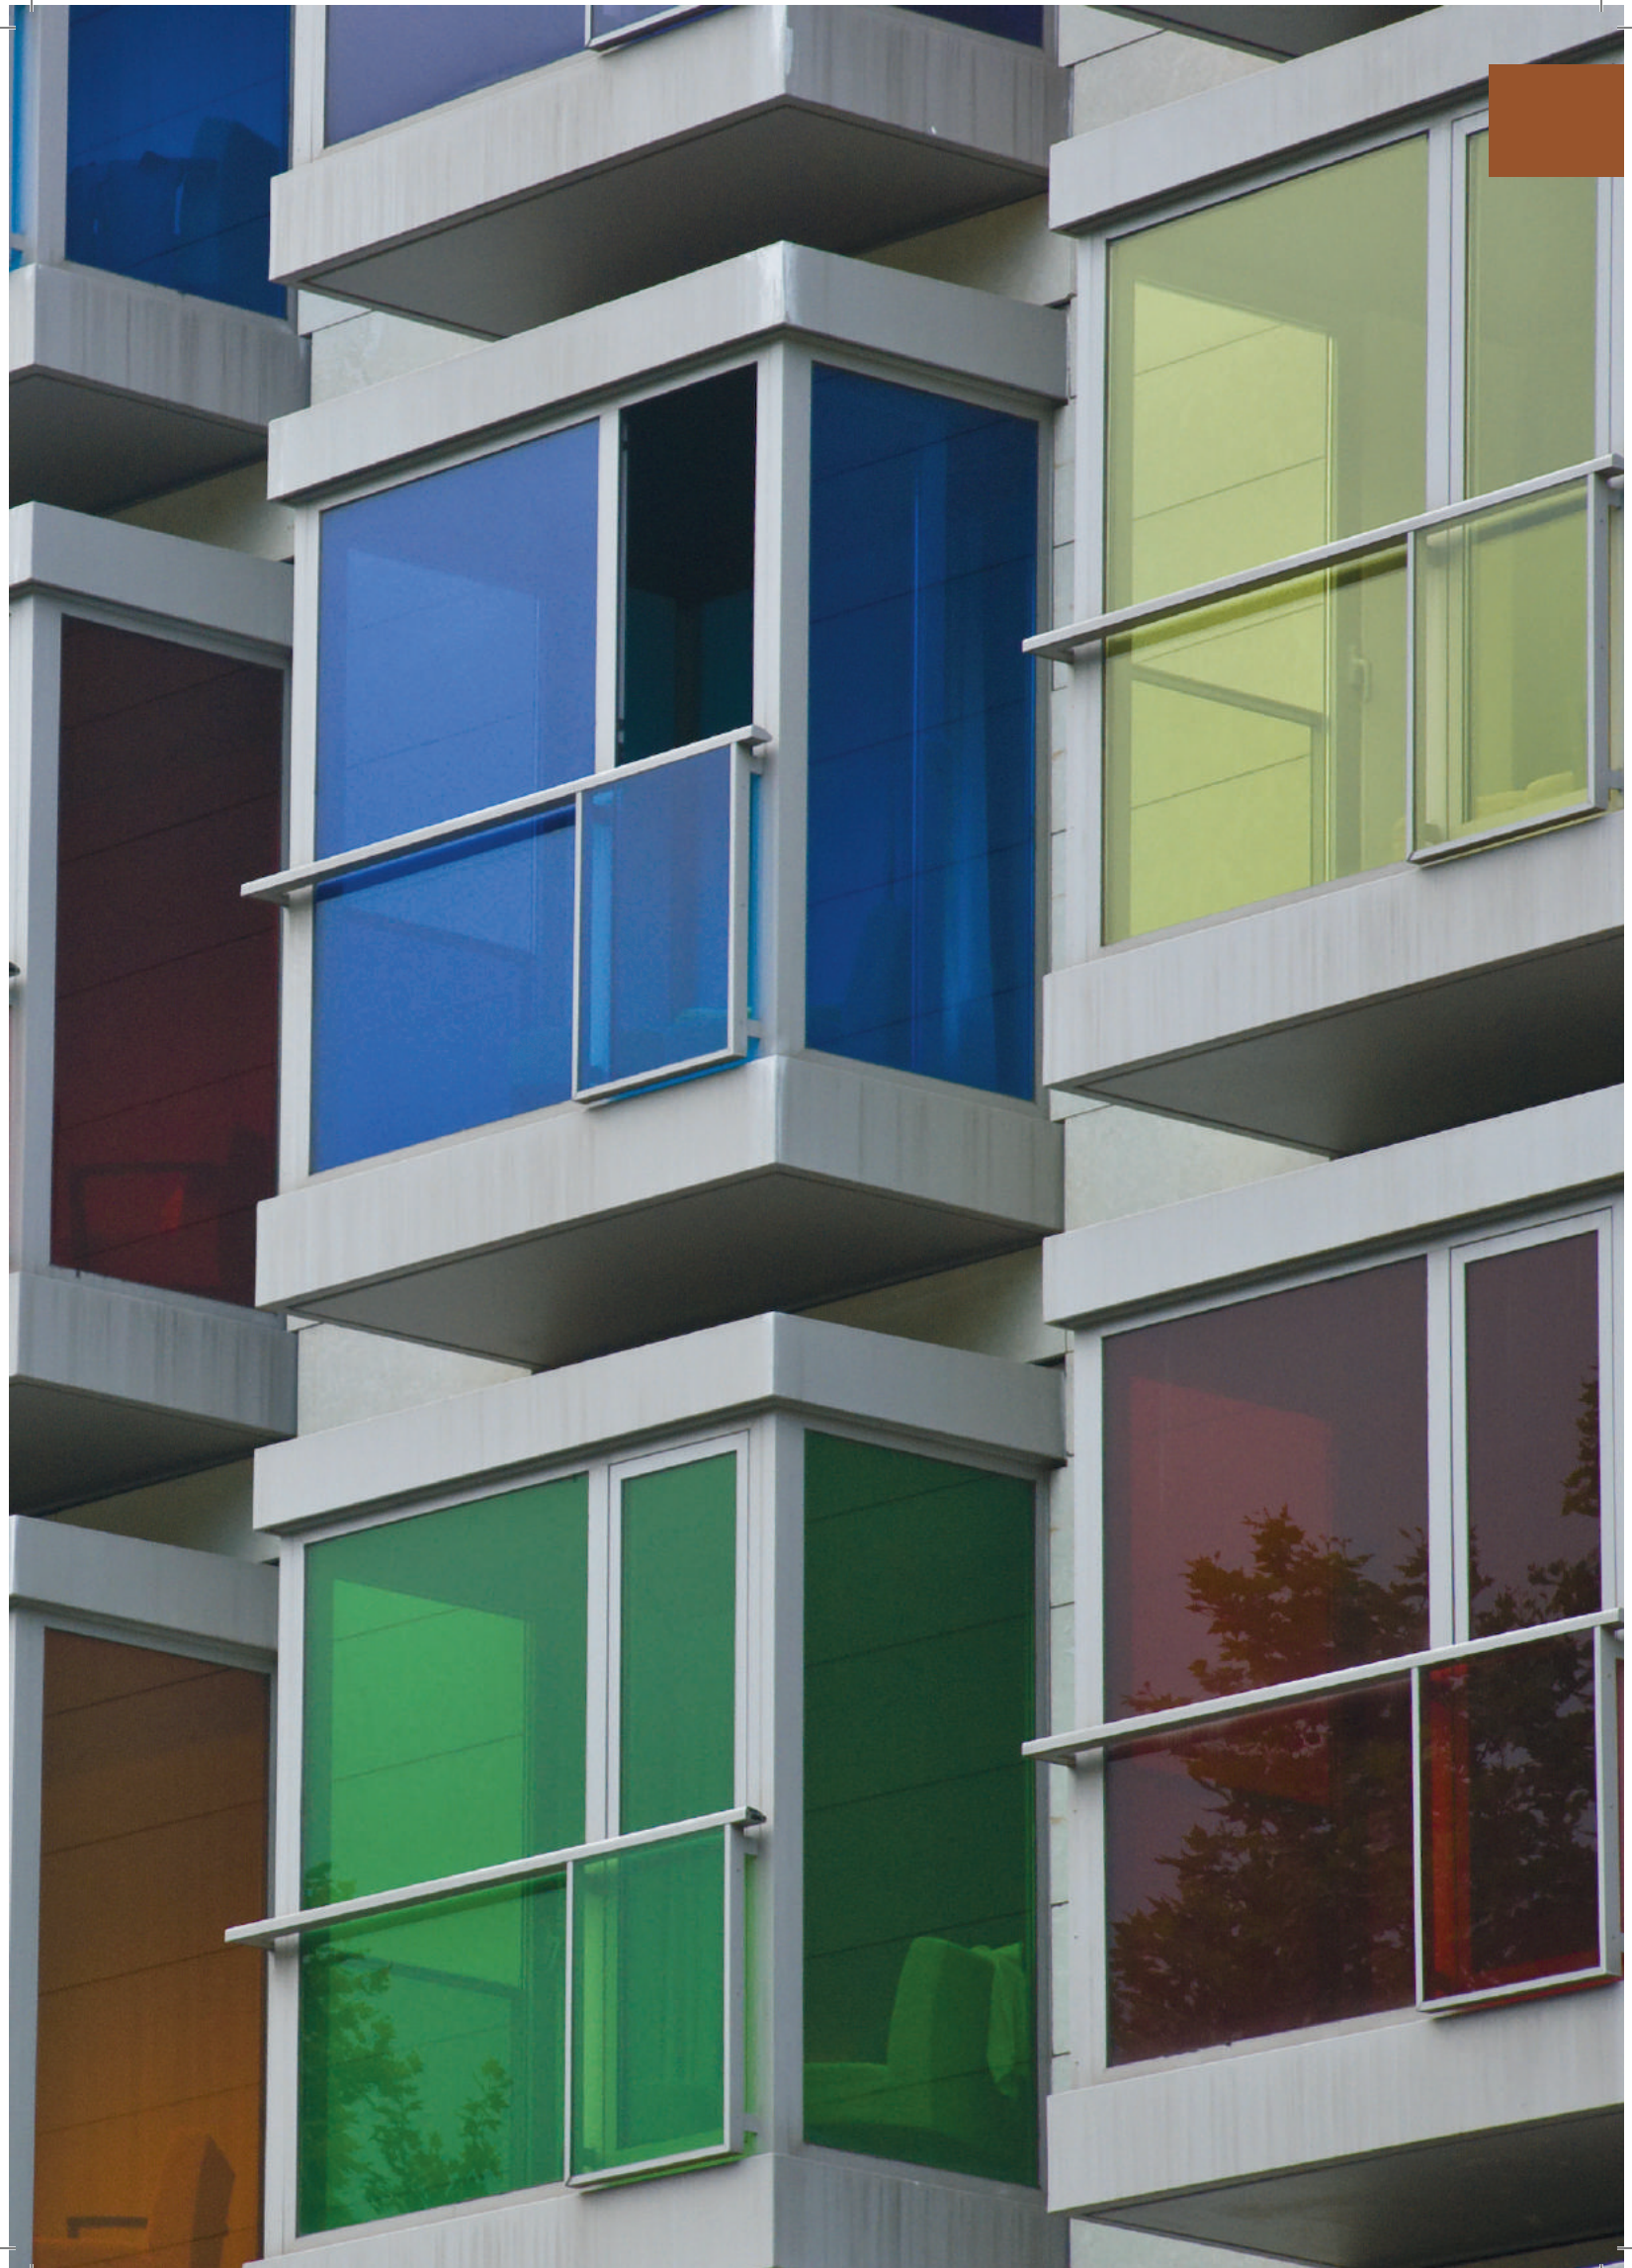

A modern public restroom with wood-grain walls, stainless steel sinks, and multi-purpose cabinets. The room features a dark tiled floor, recessed ceiling lights, and a mirror above the sinks. A multi-purpose cabinet is visible in the background, and a man's symbol is on the right wall.

MULTI-PURPOSE CABINETS AND COUNTERS

Multiple solutions for collectivity bathrooms in the minimum space.

- Elegantly and robustly designed multi-use cabinets, manufactured in AISI 304 stainless steel that combine paper towel dispensers, waste bins and high performance hand dryers.
- Perfect for installation in high traffic areas such as airports, shopping centres, gymnasiums, etc.
- They have a hand drying function (Saniflow®), depending on the model
- Front loading paper towel dispensers for C/Z folded paper.
- Removable waste bins to facilitate emptying
- Equipped with a vandal proof security lock

MULTI-PURPOSE CABINETS AND COUNTERS

bathroom countertop + hand dryer + soap dispenser



UCEN0200A

material: **unsaturated polyester resin**

finish: **white**



UCEN0200A COMPONENTS AND MATERIALS


- Countertop bathroom double sink made of unsaturated polyester resin that includes one hand dryer Dualflow® Plus unit (M14A), two soap dispenser units (DJ0120C) and two automatic tap units. Water, soap and air at the same spot to wash and dry your hands without having to move from the place you are at.
- This polyester resin is manufactured with Dolomite, an anhydrous carbonate mineral composed of calcium magnesium carbonate, that gives to this bathroom countertop a high hardness and strength.
- Furthermore, the bathroom countertop is fully coated with an antibacterial double layer of Gelcoat NPG that increases its hardness and it shields the surface, protecting the composite from all types of soaps, bleaches and a wide variety of solvents.
- Thanks to its low porosity and also to the Gelcoat NPG layer, this bathroom countertop does not get easily stained with dark liquids as it could happen with other similar materials.



- Our Bathroom countertops shown on these lines can be manufactured in different sizes, thicknesses and colors according to the need of our customers. Whatever your project is, we make sure we have a solution for you. For further information, please, contact our customer service department.

UCEN0200A TECHNICAL SPECIFICATIONS

| | |
|--|--|
| Hand dryer voltage | 220- 240 V |
| Hand dryer frequency | 50/60 Hz |
| Hand dryer electrical Isolation | Class I |
| Hand dryer total power | 420 – 1,500 W |
| Hand dryer consumption | 3.2 – 6.4 A |
| Hand dryer weight | 8.3 Kg |
| Hand dryer cover thickness | 3 mm |
| Hand dryer drying time | 8-15 sec |
| Hand dryer protection rating | IPX4 |
| Soap dispenser capacity | 0.5 L |
| Soap dispenser stainless steel thickness | 0.8 mm |
| Soap dispenser weight | 1.25 Kg |
| Suitable soaps | Chlorine-free hand soap with neutral pH of 5.5, disinfectant solutions, liquid soaps and hydro alcoholic gel |
| Quantity dispensed per pump | 1.0 ml |
| Counter top dimensions | 2,100 x 600 x 250 mm |
| Weight (aprox.) | 110 Kg (aprox.) |
| Recommended installation height | 850 mm from floor to counter top |

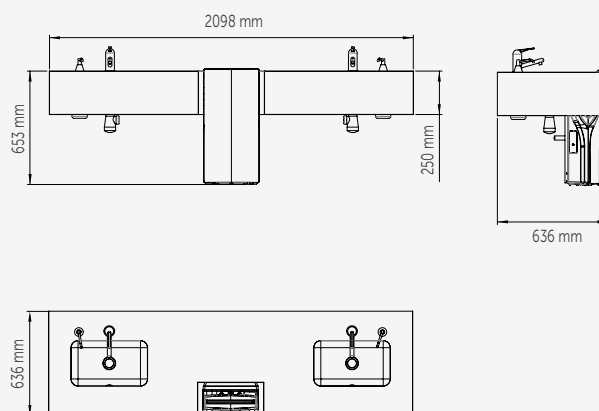

MULTI-PURPOSE CABINETS AND COUNTERS

mirror + hand dryer + soap dispenser



UCEP0185A

material: **unsaturated polyester resin**
finish: **white**




UCEP0130A

material: **unsaturated polyester resin**
finish: **white**



UCEP0185A · UCEP0130A COMPONENTS AND MATERIALS

- Mirror cabinet made of unsaturated polyester resin, 12 mm-thick, that includes either one Mediclinics' hand dryer Machflow® M09A unit (UCEP0185A) or a Speedflow® M06A (UCEP0130A) unit as well as an automatic soap dispenser DJ0037A unit, all behind a 5 mm-thick mirror. Soap and air at the same spot, just hidden behind the mirror and standing above the countertop sink to be able to wash and dry your hands without having to move from the place you are at.
- This polyester resin is manufactured with Dolomite, an anhydrous carbonate mineral composed of calcium magnesium carbonate, that gives to this mirror cabinet a high hardness and strength.
- Furthermore, the mirror cabinet is fully coated with an antibacterial double layer of Gelcoat NPG that increases its hardness and it shields the surface, protecting the composite from all types of soap, bleaches and a wide variety of solvents
- Thanks to its low porosity and also to the layer Gelcoat NPG this mirror cabinet does not get easily stained with dark liquids as it could happen with other similar materials.




- Our mirror cabinets, shown on these lines, can be manufactured in different sizes, thicknesses and colors according to the need of our customers. It is also possible to build the mirror cabinet by using our whole range of hand dryers and add a paper dispenser as well. Whatever your project is, we make sure we have a solution for you. For further information, please, contact our customer service department.


UCEP0185A · UCEP0130A TECHNICAL SPECIFICATIONS

| UCEP0185A · UCEP0130A | | UCEP0185A | | UCEP0130A | |
|--|-------------|---------------------------|--------------------|---------------------------|--------------------|
| Hand dryer voltage | 220-240 V | Hand dryer total power | 420-1,500 W | Hand dryer total power | 110-1,150 W |
| Hand dryer frequency | 50 / 60 Hz | Hand dryer consumption | 3.2 - 6.4 A | Hand dryer consumption | 1.3 - 5.0 A |
| Hand dryer electrical Isolation | Class I | Hand dryer weight | 5.1 Kg | Hand dryer weight | 3.8 Kg |
| Hand dryer cover thickness | 1.5 mm | Hand dryer drying time | 8-15 sec. | Hand dryer drying time | 10-12 sec. |
| Hand dryer protection rating | IP23 | Mirror cabinet dimensions | 830 x 185 x 610 mm | Mirror cabinet dimensions | 630 x 130 x 810 mm |
| Soap dispenser capacity | 1.0 L | | | | |
| Soap dispenser stainless | | | | | |
| steel thickness | 0.8 mm | | | | |
| Soap dispenser weight | 1.25 Kg | | | | |
| Suitable soaps | Liquid soap | | | | |
| Quantity of dispensed per pump | 1.5 ml | | | | |
| Mirror Cabinet thickness | 12 mm | | | | |
| Mirror thickness | 5 mm | | | | |
| Mirror cabinet recommended installation height | | | | | |
| 1.200 mm from floor to cabinet bottom | | | | | |

UCEP0185A

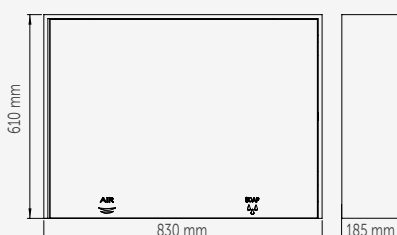

UCEP0130A



MULTI-PURPOSE CABINETS AND COUNTERS

paper towel dispenser + saniflow + waste bin



DTES0040CS

paper towel disp. capacity: **300-500 C/Z towels**
bin capacity: **35,5 L**

KT0040CS

optional frame for wall mounting

material: **AISI 304 stainless steel**

finish: **satin**



DTES0040CS · KT0040CS COMPONENTS AND MATERIALS

DTES0040CS

- Fully welded structure
- Two hinged doors with front looks with a special key provided for an easy paper replacement and bin emptying
- Paper towel dispenser with a tray with bound edging to prevent the paper towel from tearing

- Suitable for C-and Z- fold paper towels
- Saniflow automatic hand dryer
- Inner container in AISI 304 stainless steel can be removed to empty the contents
- Equipped with 2 anti-vandal keyed locks

KT0040CS


- Optional frame for wall mounting the model DTES0040CS

DTES0040CS · KT0040CS TECHNICAL SPECIFICATIONS


DTES0040CS

| | |
|---|-----------------------------------|
| Body and door thickness | 1.0 mm |
| Thickness of inner container and paper tray | 0.8 mm |
| Weight (empty) | 21.85 Kg |
| Towels folded in C/Z | 330 - 500 u |
| Towels | max. 100 x 260 mm |
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Consumption | 10 A |
| Effective airflow | 253 m ³ /h 4,248 l/min |
| Air velocity | 100 Km/h |
| Drying time | 29 sec |
| Total power | 2,250 W |
| Motor power | 250 W |
| Heating element | 2,000 W |
| r.p.m. | 5,500 |
| Air. temp (d=10 and room temp.=21°C | 50°C |
| Noise level (at 2 m) | 68 dBA |
| Bin capacity | 35.5 L |
| Recommended installation height | 1700 - 1,800 mm at upper point |
| Installation height | 1,600 mm at upper point |

DTES0040CS

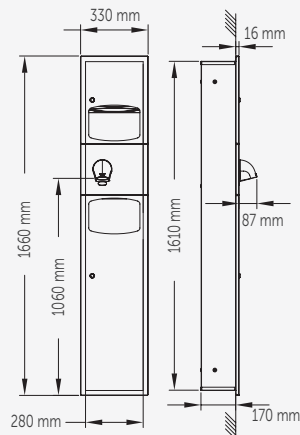

KT0040CS

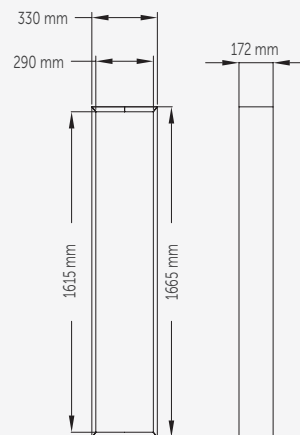

MULTI-PURPOSE CABINETS AND COUNTERS

paper towel dispenser + waste bin



DTE0030CS

paper towel disp. capacity: **400-600 C/Z towels**
bin capacity: **7,6 L**

KT0030CS

optional frame for wall mounting

material: **AISI 304 stainless steel**

finish: **satin**



DTE0050CS

paper towel disp. capacity: **600-800 C/Z towels**
bin capacity: **17,2 L**

material: **AISI 304 stainless steel**

finish: **satin**



DTE0030CS · KT0030CS · DTE0050CS COMPONENTS AND MATERIALS

DTE0030CS

- Paper towel dispenser with a tray with bound edging to prevent the paper towel from tearing
- Suitable for C and Z fold paper towels
- Inner anti-dripping container, made in thermoplastic, can be removed
- Fully welded structure
- Hinged door with safety stop and front lock with a special key provided for an easy paper replacement and bin emptying

KT0030CS

- Frame for wall mounting

DTE0050CS

- Fully welded structure
- Two hinged doors with front locks with a special key provided for an easy paper replacement and bin emptying
- Paper towel dispenser with a tray bound edging to prevent the paper towel from tearing
- Suitable for C-and Z- fold paper towels
- Inner container in AISI 304 stainless steel can be removed to empty the contents
- Equipped with 2 anti-vandal keyed locks


DTE0030CS · KT0030CS · DTE0050CS TECHNICAL SPECIFICATIONS

DTE0030CS

| | |
|---------------------------------|----------------------------------|
| Body thickness | 0.8 mm |
| Weight (empty) | 9.7 Kg |
| Bin capacity | 7.6 L |
| Towel folded capacity | 400 towels |
| Towel multi capacity | 600 towels |
| Recommended installation height | 1,700 - 1,800 mm at higher point |
| Installation height | 1,545 mm at higher point |




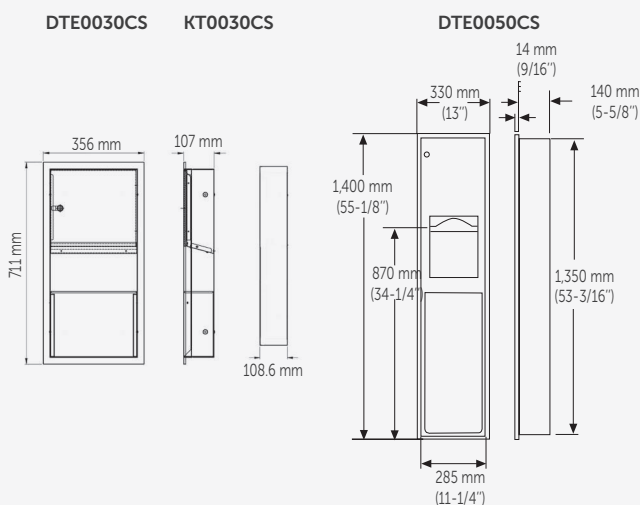

DTE0050CS


| | |
|---|----------------------------------|
| Body and door thickness | 1.2 mm |
| Thickness of inner container and paper tray | 0.8 mm |
| Weight (empty) | 14.1 Kg |
| Towel folded in C/Z | 600 - 800 towels |
| Towels | max. 100 x 260 mm |
| Bin capacity | 17.2 L |
| Recommended installation height | 1,700 - 1,800 mm at higher point |
| Installation height | 1,545 mm at higher point |



MULTI-PURPOSE CABINETS AND COUNTERS

Table

| | MODEL | MATERIAL / FINISH | | UNIT COMPONENTS | | | | | | | | RECESSED | SOAP DISPENSER CAPACITY | | PAPER TOWEL DISPENSER CAPACITY | | | WASTE BIN CAPACITY | | | LOCK WITH SECURITY KEY | ADA UNE |
|---|------------|----------------------------------|-------------------------|---------------------|----------------|-----------------|----------------|-------------------------|----------------------------------|------------------------------------|-----------|----------|-------------------------|-------|--------------------------------|-------------|-------------|--------------------|-------|------|------------------------|---------|
| | | AISI 304 stainless steel / satin | Polyester resine/ white | Dualflow Plus dryer | Machflow dryer | Speedflow dryer | Saniflow Dryer | Recessed soap dispenser | Automatic surface soap dispenser | Dispenser of C/Z fold paper towels | Waste Bin | | 1 L | 0.5 L | 600-800 C/Z | 300-500 C/Z | 400-600 C/Z | 35.5L | 17.2L | 7.5L | | |
|  | UCEN0200A | | • | • | | | | • | | | | | | • | | | | | | | | |
|  | UCEP0185A | | • | | • | | | | • | | | | • | | | | | | | | • | |
| | UCEP0130A | | • | | | • | | | • | | | | • | | | | | | | | • | |
|  | DTES0040CS | • | | | | | • | | | • | • | • | | | | • | | • | | | • | • |
| | KT0040CS | • | | | | | | | | | | | | | | | | | | | | |
|  | DTE0030CS | • | | | | | | | | • | • | • | | | | | • | | | • | • | • |
| | KT0030CS | • | | | | | | | | | | | | | | | | | | | | |
|  | DTE0050CS | • | | | | | | | | • | • | • | | | • | | | | • | | • | • |



BATHROOM ACCESSORIES

we've thought of every detail





BATHROOM ACCESSORIES

Washroom accessories that improve the functionality of the facility, extend its features, increase comfort and, at the same time, enhance its attractiveness.

- Wide selection of towel holders, shelves, soap dispensers, roll holders, brushes, hangers, paper towel dispensers, etc., manufactured in various materials (stainless steel, chromed brass, etc.) and in different finishes (satin, bright, etc.), with the toilet quality seal.
- 3 different toilet accessory lines (**MEDINOX**, **MEDISTEEL** and **MEDICROM**) that stamp their differentiating character on each toilet facility, at the same time, they increase the practicality of this space.
- Highly versatile and functional toilet accessory lines, designed to be adapted to any space and need
- Elegant and quality solutions, whose finishes provide convenience and comfort.

BATHROOM ACCESSORIES

medinox series



AI0040C

towel shelf with bar

material: **AISI 304 stainless steel**
finish: **bright**

AI0040CS

towel shelf with rail

material: **AISI 304 stainless steel**
finish: **satin**



AI0030C

double towel rail

material: **AISI 304 stainless steel**
finish: **bright**

AI0030CS

double towel rail

material: **AISI 304 stainless steel**
finish: **satin**



AI0020C

towel rail

material: **AISI 304 stainless steel**
finish: **bright**

AI0020CS

towel rail

material: **AISI 304 stainless steel**
finish: **satin**



AI0040C · AI0040CS · AI0030C · AI0030CS · AI0020C · AI0020CS COMPONENTS AND MATERIALS

- Hidden wall brackets

AI0040C · AI0040CS


- Shelf of six cylindrical tubes

AI0040C / CS · AI0030C / CS · AI0020C / CS


- Cylindrical tube bars

AI0040C · AI0040CS · AI0030C · AI0030CS · AI0020C · AI0020CS TECHNICAL SPECIFICATIONS


AI0040C · AI0040CS



AI0030C · AI0030CS

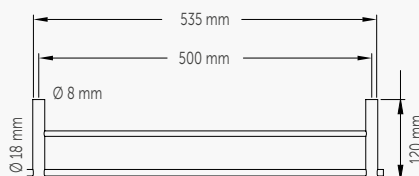

AI0020C · AI0020CS



BATHROOM ACCESSORIES

medinox series



AI0090C

towel ring

material: **AISI 304 stainless steel**

finish: **bright**

AI0090CS

towel ring

material: **AISI 304 stainless steel**

finish: **satin**



AI0110C

towel ring

material: **AISI 304 stainless steel**

finish: **bright**

AI0110CS

towel ring

material: **AISI 304 stainless steel**

finish: **satin**



AI0060C

shelf

material: **AISI 304 stainless steel**

finish: **bright**

AI0060CS

towel ring

material: **AISI 304 stainless steel**

finish: **satin**



AI0090C · AI0090CS · AI0110C · AI0110CS · AI0060C · AI0060CS COMPONENTS AND MATERIALS

- Hidden wall brackets


AI0090C · AI0090CS · AI0110C · AI0110CS

- Cylindrical tube bar

AI0060C · AI0060CS

- Cylindrical tube bars
- One-piece tray, 0,8 mm thick and with rounded edges

AI0090C · AI0090CS · AI0110C · AI0110CS · AI0060C · AI0060CS TECHNICAL SPECIFICATIONS

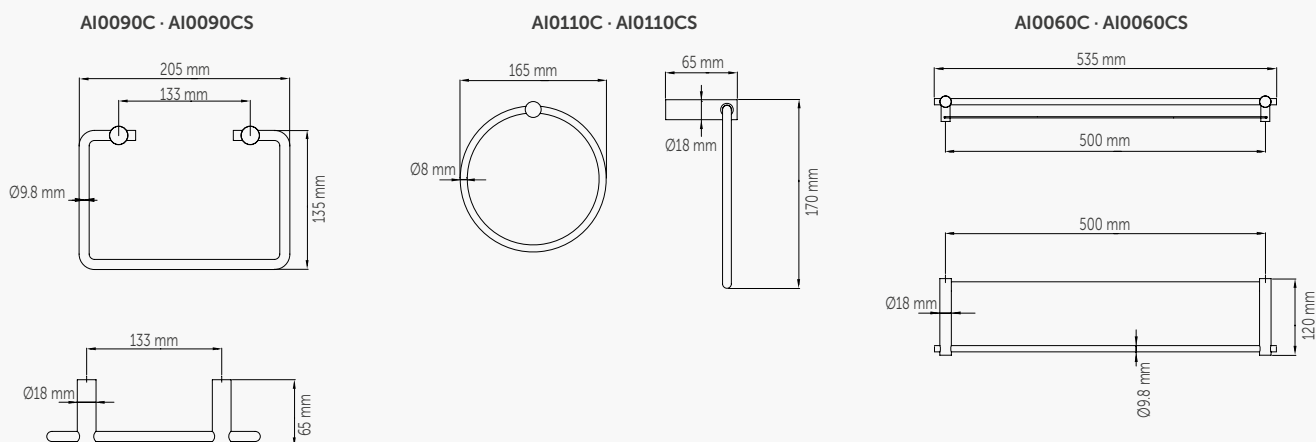

BATHROOM ACCESSORIES

medinox series



AI0140C

soap dish

material: **AISI 304 stainless steel**
finish: **bright**

AI0140CS

soap dish

material: **AISI 304 stainless steel**
finish: **satin**



AI0160C

soap dish

material: **AISI 304 stainless steel**
finish: **bright**

AI0160CS

soap dish

material: **AISI 304 stainless steel**
finish: **satin**



AI0050C

soap dish

material: **AISI 304 stainless steel**
finish: **bright**

AI0050CS

soap dish

material: **AISI 304 stainless steel**
finish: **satin**



AI0140C · AI0140CS · AI0160C · AI0160CS · AI0050C · AI0050CS COMPONENTS AND MATERIALS

- Hidden wall brackets

AI0140C · AI0140CS · AI0160C · AI0160CS


- Tray of five cylindrical rods

AI0050C · AI0050CS


- One-piece tray, 0,8 mm thick and with rounded edges
- Cylindrical tube bars

AI0140C · AI0140CS · AI0160C · AI0160CS · AI0050C · AI0050CS TECHNICAL SPECIFICATIONS


AI0140C · AI0140CS

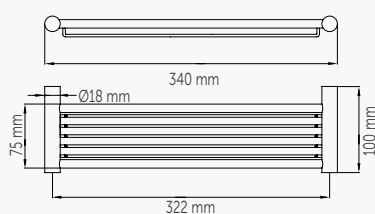

AI0160C · AI0160CS

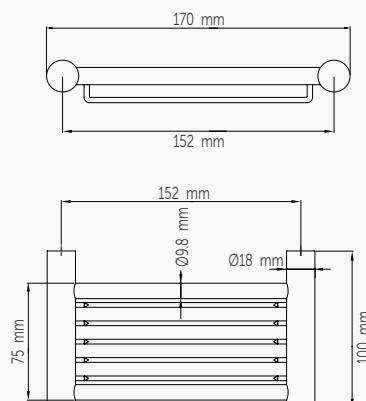

AI0050C · AI0050CS

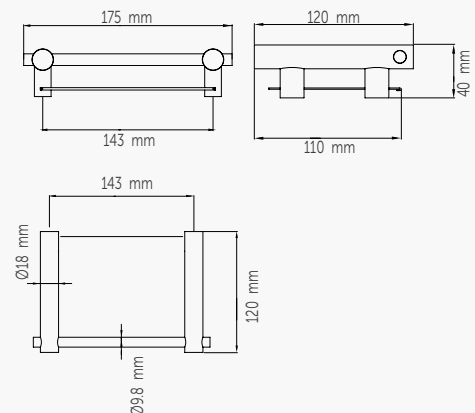

BATHROOM ACCESSORIES

medinox series



AI0080C

toilet roll holder with cover

material: **AISI 304 stainless steel**
finish: **bright**

AI0080CS

toilet roll holder with cover

material: **AISI 304 stainless steel**
finish: **satin**



AI0070C

toilet roll holder

material: **AISI 304 stainless steel**
finish: **bright**

AI0070CS

toilet roll holder

material: **AISI 304 stainless steel**
finish: **satin**



AI0100C

holder for spare toilet paper roll

material: **AISI 304 stainless steel**
finish: **bright**

AI0100CS

holder for spare toilet paper roll

material: **AISI 304 stainless steel**
finish: **satin**



AI0080C · AI0080CS · AI0070C · AI0070CS · AI0100C · AI0100CS COMPONENTS AND MATERIALS

- Hidden wall brackets

AI0080C / CS · AI0070C / CS · AI0100C / CS

- Cylindrical tube axis

AI0080C · AI0080CS

- One-piece cover, 0,8 mm with thick and with rounded edges

AI0080C · AI0080CS · AI0070C · AI0070CS · AI0100C · AI0100CS TECHNICAL SPECIFICATIONS

Support thickness 0,8 mm

AI0080C · AI0080CS

Axis thickness 9,8 mm
Lid thickness 0,8 mm


AI0070C · AI0070CS

Axis thickness 0,8 mm


AI0100C · AI0100CS

Axis thickness 9,8 mm


AI0080C · AI0080CS



AI0070C · AI0070CS

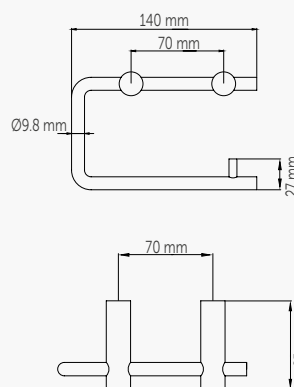

AI0100C · AI0100CS



BATHROOM ACCESSORIES

medinox series



ES0965C

toilet brush holder

material: **AISI 304 stainless steel**
finish: **bright**

ES0965CS

toilet brush holder

material: **AISI 304 stainless steel**
finish: **satin**



AI0010C

hook

material: **AISI 304 stainless steel**
finish: **bright**

AI0010CS

hook

material: **AISI 304 stainless steel**
finish: **satin**



AI0920C

sanitary bag dispenser

material: **AISI 304 stainless steel**
finish: **bright**

AI0920CS

sanitary bag dispenser

material: **AISI 304 stainless steel**
finish: **satin**



ES0965C · ES0965CS · AI0010C · AI0010CS · AI0920C · AI0920CS COMPONENTS AND MATERIALS

ES0965C · ES0965CS

- Sisal fibre brush
- Assembling plate for mounting on the wall

AI0010C · AI0010CS

- Hidden wall bracket

AI0920C · AI0920CS

- Suitable for feminine sanitary bag refill boxes of 136 x 91 x 24 mm

ES0965C · ES0965CS · AI0010C · AI0010CS · AI0920C · AI0920CS TECHNICAL SPECIFICATIONS

ES0965C · ES0965CS

| | |
|--------------------------|--------|
| Body thickness | 1 mm |
| Handle and lid thickness | 1 mm |
| Rod thickness | 0.8 mm |


AI0010C · AI0010CS

| | |
|-------------------|--------|
| Support thickness | 0.8 mm |
|-------------------|--------|


AI0920C · AI0920CS

| | |
|----------------|------|
| Body thickness | 1 mm |
|----------------|------|


ES0965C · ES0965CS

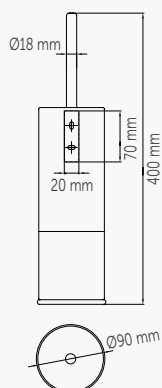

AI0010C · AI0010CS




AI0920C · AI0920CS



BATHROOM ACCESSORIES

medisteel series

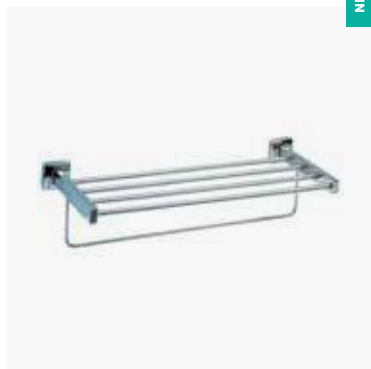

AI0710C


towel shelf with bar

material: **AISI 304 stainless steel**
finish: **bright**

AI0710CS

towel shelf with bar

material: **AISI 304 stainless steel**
finish: **satin**

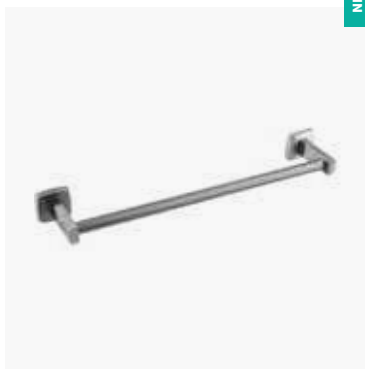

AI0184C

towel rail

material: **AISI 304 stainless steel**
finish: **bright**

AI0184CS

towel rail

material: **AISI 304 stainless steel**
finish: **satin**



AI0115C

towel ring

material: **AISI 304 stainless steel**
finish: **bright**

AI0115CS

towel ring

material: **AISI 304 stainless steel**
finish: **satin**



AI0710C · AI0710CS · AI0184C · AI0184CS · AI0115C · AI0115CS COMPONENTS AND MATERIALS

AI0710C / CS · AI0184C / CS · AI0115C / CS

- Support with trim

AI0710C · AI0710CS

- Shelf made up of 4 cylindrical tubes
- Cylindrical tube hanger

AI0184C · AI0184CS

- Cylindrical tube rail

AI0115C · AI0115CS

- Cylindrical tube hanger

AI0710C · AI0710CS · AI0184C · AI0184CS · AI0115C · AI0115CS TECHNICAL SPECIFICATIONS

| | |
|-------------------|--------|
| Support thickness | 0.8 mm |
| Plate thickness | 1.6 mm |

AI0710C · AI0710CS

| | |
|----------------------|--------|
| Shelf tube thickness | 0.8 mm |
|----------------------|--------|


AI0184C · AI0184CS

| | |
|--------------|---------|
| Bar diameter | Ø 19 mm |
|--------------|---------|


AI0115C · AI0115CS

| | |
|-----------------|--------|
| Hanger diameter | Ø 6 mm |
|-----------------|--------|


AI0710C · AI0710CS



AI0184C · AI0184CS




AI0115C · AI0115CS



BATHROOM ACCESSORIES

medisteel series




AI0720C
shelf

material: **AISI 304 stainless steel**
finish: **bright**

AI0720CS
shelf

material: **AISI 304 stainless steel**
finish: **satin**




AI0118C
soap dish

material: **AISI 304 stainless steel**
finish: **bright**

AI0118CS
soap dish

material: **AISI 304 stainless steel**
finish: **satin**



AI0985C
tissue dispenser

material: **AISI 304 stainless steel**
finish: **bright**

AI0985CS
tissue dispenser

material: **AISI 304 stainless steel**
finish: **satin**

AI0720C · AI0720CS · AI0118C · AI0118CS · AI0985C · AI0985CS COMPONENTS AND MATERIALS

AI0720C · AI0720CS

- Single piece shelf with rounded corners
- Support with trim

AI0118C · AI0118CS

- Tray with 2 channels for holding the soap bar and 2 drainage holes

AI0985C · AI0985CS

- Hidden lock for refilling

AI0720C · AI0720CS · AI0118C · AI0118CS · AI0985C · AI0985CS TECHNICAL SPECIFICATIONS

AI0720C · AI0720CS

| | |
|-------------------|--------|
| Shelf thickness | 0.8 mm |
| Support thickness | 0.8 mm |
| Plate thickness | 1.6 mm |


AI0118CS · AI0118CS

| | |
|-------------------|--------|
| Tray thickness | 0.8 mm |
| Support thickness | 0.8 mm |
| Plate thickness | 1.6 mm |


AI0985C · AI0985CS

| | |
|--------------------------|--------|
| Body and plate thickness | 0.8 mm |
|--------------------------|--------|


AI0720C · AI0720CS



AI0118C · AI0118CS



AI0985C · AI0985CS



BATHROOM ACCESSORIES

medisteel series



AI0310C

toilet roll holder with cover
material: **AISI 304 stainless steel**
finish: **bright**

AI0310CS

toilet roll holder with cover
material: **AISI 304 stainless steel**
finish: **satin**




AIE310C

toilet roll holder with cover, recessed
material: **AISI 304 stainless steel**
finish: **bright**

AIE310CS

toilet roll holder with cover, recessed
material: **AISI 304 stainless steel**
finish: **satin**

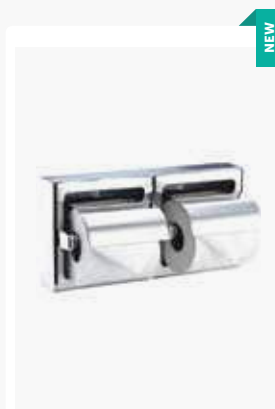

AI0320C

double toilet roll holder with cover
material: **AISI 304 stainless steel**
finish: **bright**

AI0320CS

double toilet roll holder with cover
material: **AISI 304 stainless steel**
finish: **satin**



AIE320C

double toilet roll holder with cover, recessed
material: **AISI 304 stainless steel**
finish: **bright**

AIE320CS

double toilet roll holder with cover, recessed
material: **AISI 304 stainless steel**
finish: **satin**




AI0310C · AI0310CS · AIE310C · AIE310CS · AI0320C · AI0320CS · AIE320C · AIE320CS
COMPONENTS AND MATERIALS

- Single piece body
- High strenght chromed plastic axis
- Chromed zamak supports


AI0310C · AI0310CS · AIE310C · AIE310CS · AI0320C · AI0320CS · AIE320C · AIE320CS
TECHNICAL SPECIFICATIONS

| | |
|-----------------|--------|
| Body thickness | 0.8 mm |
| Cover thickness | 1.2 mm |


AI0310C · AI0310CS




AIE310C · AIE310CS



AI0320C · AI0320CS




AIE320C · AIE320CS



BATHROOM ACCESSORIES

medisteel series




AI0129C
toilet roll holder with cover

material: **AISI 304 stainless steel**
finish: **bright**

AI0129CS
toilet roll holder with cover

material: **AISI 304 stainless steel**
finish: **satin**




AI0113C
toilet roll holder

material: **AISI 304 stainless steel**
finish: **bright**

AI0113CS
toilet roll holder

material: **AISI 304 stainless steel**
finish: **satin**

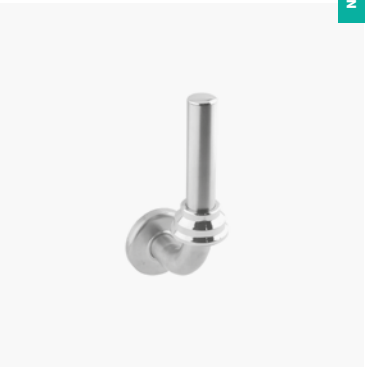

AI0968C
toilet spare roll holder

material: **AISI 304 stainless steel**
finish: **bright**

AI0968CS
toilet spare roll holder

material: **AISI 304 stainless steel**
finish: **satin**

AI0129C · AI0129CS · AI0113C · AI0113CS · AI0968C · AI0968CS COMPONENTS AND MATERIALS

AI0129C · AI0129CS

- Single piece body
- White plastic axis

AI0113C · AI0113CS

- Support with trim
- Chromed plastic spindle

AI0968C · AI0968CS


- Tube axis with trim
- Chromed plastic stop

AI0129C · AI0129CS · AI0113C · AI0113CS · AI0968C · AI0968CS TECHNICAL SPECIFICATIONS

AI0129C · AI0129CS

| | |
|-----------------|--------|
| Body thickness | 1.2 mm |
| Cover thickness | 0.8 mm |


AI0129C · AI0129CS



AI0113C · AI0113CS

| | |
|-------------------|--------|
| Support thickness | 0.8 mm |
| Plate thickness | 1.6 mm |


AI0113C · AI0113CS



AI0968C · AI0968CS


| | |
|-------------------|-----------|
| Spindle thickness | 1.2 mm |
| Spindle diameter | Ø 66 mm |
| Plate diameter | Ø 0.70 mm |

AI0968C · AI0968CS



BATHROOM ACCESSORIES

medisteel series




AI0036C
double hanger

material: **AISI 304 stainless steel**
finish: **bright**

AI0036CS
double hanger

material: **AISI 304 stainless steel**
finish: **satin**




AI0033C
hanger

material: **AISI 304 stainless steel**
finish: **bright**

AI0033CS
hanger

material: **AISI 304 stainless steel**
finish: **satin**



ES0968C
toilet brush holder

material: **AISI 304 stainless steel**
finish: **bright**

ES0968CS
toilet brush holder

material: **AISI 304 stainless steel**
finish: **satin**

AI0036C · AI0036CS · AI0033C · AI0033CS · ES0968C · ES0968CS COMPONENTS AND MATERIALS

AI0036C · AI0036CS · AI0033C · AI0033CS

- Support with trim

ES0968C · ES0968CS


- Sisal fibre brush
- Assembling plate for mounting on the wall

AI0036C · AI0036CS · AI0033C · AI0033CS · ES0968C · ES0968CS TECHNICAL SPECIFICATIONS

AI0036C · AI0036CS · AI0033C · AI0033CS

| | |
|-------------------|--------|
| Hanger thickness | 3.6 mm |
| Support thickness | 0.8 mm |
| Plate thickness | 1.6 mm |


AI0036C · AI0036CS

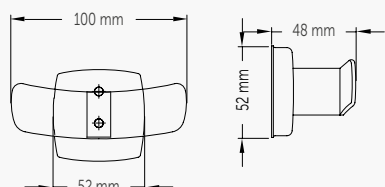


ES0968C · ES0968CS

| | |
|--------------------------|--------|
| Body thickness | 0.4 mm |
| Handle and lid thickness | 0.4 mm |
| Rod thickness | 0.8 mm |

AI0033C · AI0033CS




ES0968C · ES0968CS

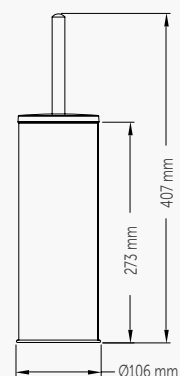


BATHROOM ACCESSORIES

medisteel series




AI0170C
magnifying mirror

material: **AISI 304 stainless steel**
finish: **bright**




AI0910C
retractable clothes line

material: **AISI 304 stainless steel**
finish: **bright**



PP0104CS
ashtray

material: **AISI 304 stainless steel**
finish: **satin**



PP0162C
toilet roll holder with cover

material: **AISI 304 stainless steel**
finish: **bright**

PP0162CS
toilet roll holder with cover

material: **AISI 304 stainless steel**
finish: **satin**

AI0170C · AI0910C · PP0104CS · PP162C · PP0162CS COMPONENTS AND MATERIALS

AI070C

- Guide for height adjustment
- Reversible mirror, normal and 3x magnification
- Extendable double arm, up to 410 mm

AI0910C

- Holding support
- Fixed to the wall by means of two screws

PP0162C · PP0162CS





- Pivoting container that allows emptying without removing the frame, and fixed to the body by means of a hinge

PP0104CS

- Extractable container for emptying

AI0170C · AI0910C · PP0104CS · PP162C · PP0162CS TECHNICAL SPECIFICATIONS

| AI0910C | | PP0140CS | | PP0162C · PP0162CS | |
|-------------------------|-------------|---------------------|--------|------------------------------|--------|
| Body and stop thickness | 0.6 mm | Body thickness | 1.2 mm | Body and container thickness | 0.8 mm |
| Plate thickness | 0.9 mm | Container thickness | 0.8 mm | | |
| Cord extension | 210 cm max. | Cover thickness | 1.2 mm | | |



BATHROOM ACCESSORIES

medicrom series



AC0959C

towel shelf with rail

material: **chrome-plated brass**

finish: **bright**



AC0973C

grab bar / towel roll of 655 mm

material: **chrome-plated brass**

finish: **bright**

AC0974C

grab bar / towel rail of 530 mm

material: **chrome-plated brass**

finish: **bright**

AC0950C

grab bar / towel of 305 mm

material: **chrome-plated brass**

finish: **bright**



AC0961C

towel rail

material: **chrome-plated brass**

finish: **bright**



AC0959C · AC0973C · AC0974C · AC0950C · AC0961C COMPONENTS AND MATERIALS

AC0959C · AC0973C · AC0974C · AC0950C · AC0961C

- Grab bar with snap flange cover

AC0959C

- Shell made of 4 cylindrical tubes


AC0959C · AC0973C · AC0974C · AC0950C · AC0961C TECHNICAL SPECIFICATIONS

AC0959C


| | |
|-----------------|----------|
| Shelf thickness | 1 mm |
| Shelf | Ø14.5 mm |

AC0973C · AC0974C · AC0950C · AC0961C

| | |
|----------------|--------|
| Tube thickness | 1 mm |
| Tube diameter | Ø25 mm |

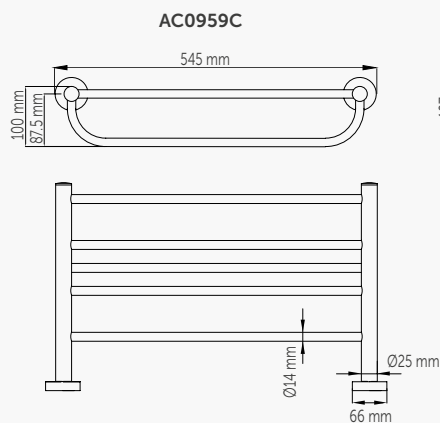


AC0973C · AC0974C · AC0950C

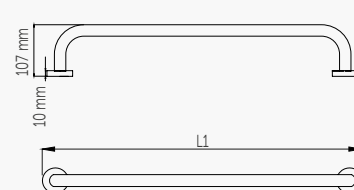

L1:
AC0973C: 667 mm
AC0974C: 537 mm
AC0950C: 305 mm

AC0961C



BATHROOM ACCESSORIES

medicrom series



AC0978C
towel ring Ø200 mm

material: **chrome-plated brass**
finish: **bright**

AC0979C
towel ring Ø170 mm

material: **AISI 304 stainless steel**
finish: **bright**



AC0956C
grab bar

material: **chrome-plated brass**
finish: **bright**



AC0957C
grab bar with soap dish

material: **chrome-plated brass**
finish: **bright**

AC0978C · AC0979C · AC0956C · AC0957C COMPONENTS AND MATERIALS

AC0978C · AC0979C

- Support with snap flange cover

AC0956C

- Grab bar with snap flange cover

AC0957C

- Grab bar with snap flange cover
- Tray of cylindrical rods
- Chrome-plated with protection of 9,8 µm nickel and 0,4 µm chrome

AC0978C · AC0979C · AC0956C · AC0957C TECHNICAL SPECIFICATIONS


AC0978C · AC0979C

Hook thickness 1 mm

AC0956C · AC0957C

Tube thickness 1 mm


AC0978C · AC0979C




L1:

AC0978C: Ø200 mm · AC0979C: Ø170 mm

AC0956C



AC0957C



BATHROOM ACCESSORIES

medicrom series



AC0962C 
175 x 107 mm soap dish

material: **chrome-plated brass**
finish: **bright**

AC0963C 
265 x 107 mm soap dish

material: **AISI 304 stainless steel**
finish: **bright**



AC0964C
triangular soap dish

material: **chrome-plated brass**
finish: **bright**



AC0780C
shelf

material: **chrome brass / glass**
finish: **bright**



AC0962C · AC0963C · AC0964C · AC0780C COMPONENTS AND MATERIALS

AC0962C · AC0963C · AC0964C · AC0780C

- Chrome-plated with protection of 9,8 µm nickel and 0,4 µm chrome

AC0962C · AC0963C

- Tray of cylindrical rods
- Support with snap flange cover

AC0964C


- Tray of cylindrical rods

AC0780C

- Glass shelf
- Support with snap flange cover


AC0962C · AC0963C · AC0964C · AC0780C TECHNICAL SPECIFICATIONS

AC0962C · AC0963C

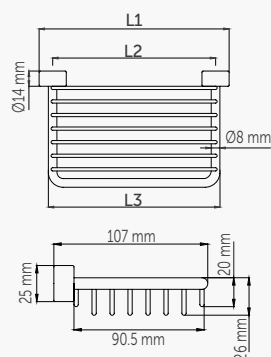

L1: AC0962C: 175 mm · AC0963C: 265 mm
L2: AC0962C: 150 mm · AC0963C: 240 mm
L3: AC0962C: 158 mm · AC0963C: 248 mm

AC0964C

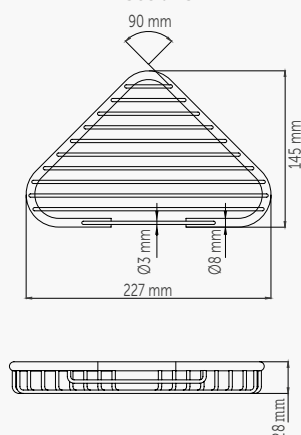

AC0780C



BATHROOM ACCESSORIES

medicrom series



AC0967C

toilet roll holder with cover

material: **chrome-plated brass**

finish: **bright**



AC0970C

holder for spare toilet paper roll

material: **chrome-plated brass**

finish: **bright**



AC0967C · AC0970C COMPONENTS AND MATERIALS

AC0967C

- One-piece cover
- White plastic axis

AC0970C

- Support with snap flange cover

AC0967C · AC0970C

- Chrome-plated with protection of 9,8 µm nickel and 0,4 µm chrome

AC0967C · AC0970C TECHNICAL SPECIFICATIONS


AC0967C

| | |
|------------------------|--------|
| Lid thickness | 0.8 mm |
| Wall bracket thickness | 2 mm |


AC0970C

| | |
|-------------------|------------------|
| Axis thickness | 1 mm and Ø 53 mm |
| Snap flange cover | Ø 50 mm |

AC0967C

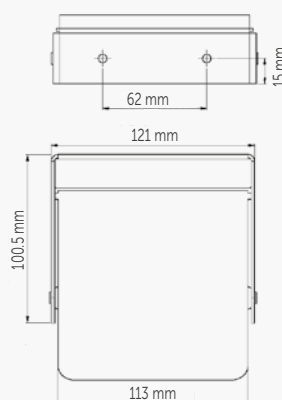

AC0970C

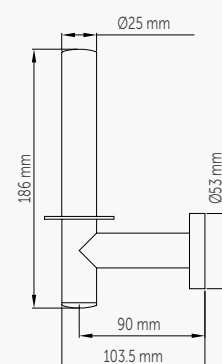

BATHROOM ACCESSORIES

medicrom series



AC0966C

hook

material: **chrome-plated brass**

finish: **bright**



ES0010C

toilet brush holder

material: **chrome-plated brass**

finish: **bright**



AC0966C · ES0010C COMPONENTS AND MATERIALS

AC0966C

- Support with snap flange cover

ES0010C

- Sisal fibre brush
- Assembling plate for mounting on the wall

AC0966C · ES0010C

- Chrome-plated with protection of 9,8 µm nickel and 0,4 µm chrome

AC0966C · ES0010C TECHNICAL SPECIFICATIONS

AC0966C



Hook thickness 1 mm and Ø 25 mm

ES0010C

Body thickness 1 mm

Handle and lid thickness 1 mm

Rod thickness 0.8 mm

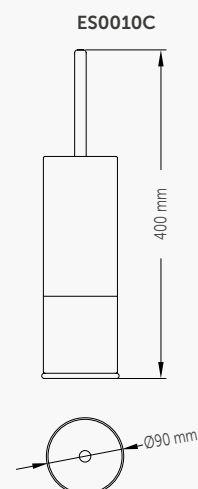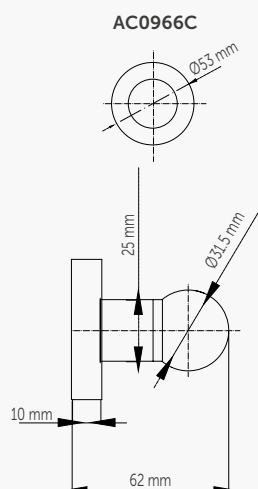

BATHROOM ACCESSORIES

medicrom series



AC0083C
tissue dispenser

material: **chrome-plated brass**
finish: **bright**



AC0976C
tissue dispenser

material: **chrome-plated brass**
finish: **bright**



AC0083C · AC0976C COMPONENTS AND MATERIALS

- Chrome-plated with protection of 9,8 µm nickel and 0,4 µm chrome

AC0083C

- Hidden lock for replenishment

AC0976C

- No back cover (not suitable for mounting on the wall or on an horizontal surface)

AC0083C · AC0976C TECHNICAL SPECIFICATIONS


AC0083C

| | |
|----------------|--------|
| Body thickness | 0.8 mm |
|----------------|--------|


AC0976C


| | |
|----------------|--------|
| Body thickness | 0.6 mm |
|----------------|--------|

AC0083C

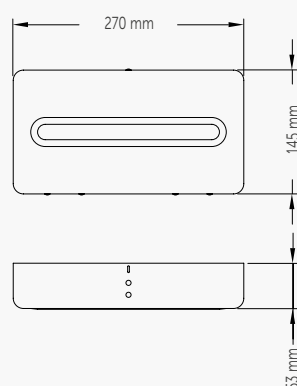

AC0976C

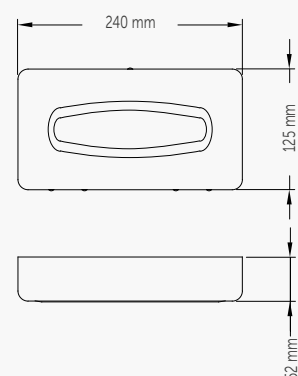



GRAB BARS AND OTHER ACCESSORIES

*let us give you a hand
with your daily tasks*





GRAB BARS AND OTHER ACCESORIES FOR A BARRIER-FREE WASHROOMS

Functional solutions that make the bathroom a completely safe and accessible place for everyone.

- Using the bathroom independently is very important. For this reason, our wide range of grab bars and accessories for a barrier-free washroom, manufactured in various materials (stainless steel, steel, etc.) and in different finishes (satin, bright, white, etc.), provide a better quality of life to all those, without distinction, who in one way or another do not have full physical capability or sensory function.
- All our grab bars and shower seats have an ergonomic and functional design that assists in the functional limitations of those with a disability.
- Our product portfolio includes a wide range of grab bars, shower seats, mirrors, etc., conceived and designed to allow the bathroom to be used in complete safety and fully independently by those with mobility problems.

GRAB BARS AND OTHER ACCESSORIES

medinox AISI 304 stainless steel bars



BR0300CS

length: 387 mm

BR0400CS

length: 537 mm

BR0600CS

length: 692 mm

BR0750CS

length: 842 mm

BR0900CS


length: 997 mm

BR1200CS

length: 1200 mm - straight

material: AISI 304 stainless steel

finish: satin *



BAI090CS

90° angle

BAD090CS

90° angle

material: AISI 304 stainless steel

finish: satin*



***ALSO AVAILABLE
IN BRIGHT FINISH**

BR0300CS · BR400CS · BR600CS · BR750CS · BR900CS · BR1200CS · BAI090CS · BAD090CS
COMPONENTS AND MATERIALS

- Snap flange cover for hidden mounting
- Stainless steel nuts and bolts for masonry walls



- The strength of the bar support will depend on the type of wall and the supports used

BR0300CS · BR400CS · BR600CS · BR750CS · BR900CS · BR1200CS · BAI090CS · BAD090CS
TECHNICAL SPECIFICATIONS

| | |
|-------------------|--------|
| Bar | Ø32 mm |
| Tube thickness | 1.5 mm |
| Snap flange cover | Ø82 mm |

BR0300CS/400CS/600CS/750CS/900CS/1200CS BAI090CS · BAD090CS

L1:
BR0300CS: 387 mm
BR0400CS: 537 mm
BR0600CS: 692 mm
BR0750CS: 842 mm
BR0900CS: 997 mm
BR1200CS: 1200 mm



GRAB BARS AND OTHER ACCESSORIES

medinox AISI 304 stainless steel bars



BG0800CS

vertical swing

material: AISI 304 stainless steel

finish: satin*

BG0850CS

vertical swing

material: AISI 304 stainless steel

finish: satin*



BG0900CS

vertical swing with brake

material: AISI 304 stainless steel

finish: satin*



BGC710CS

vertical swing on fixed column

material: AISI 304 stainless steel

finish: satin



***ALSO AVAILABLE IN BRIGHT FINISH**

BG0800CS · BG0850CS · BG0900CS · BGC710CS COMPONENTS AND MATERIALS

BG0800CS · BG0850CS · BGC710CS

- Toilet roll holder hook
- Safety system that blocks the bar in a vertical position to prevent it dropping accidentally
- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of surface and the supports used

- The rotating point is strengthened with a double tube for maximum resistance

BG08000CS · BGC710CS

- The one-piece structure provides enhanced stability and prevents dirt from building up

BG0900CS

- Three brake positions that avoid accidental collapse

BG0800CS · BG0850CS · BG0900CS · BGC710CS TECHNICAL SPECIFICATIONS

BG0800CS · BG0850CS · BGC0900CS

| | |
|----------------------|--------|
| Bar | Ø32 mm |
| Tube thickness | 1.5 mm |
| Base plate thickness | 3 mm |

BG07100CS

| | |
|----------------------|--------|
| Bar | Ø32 mm |
| Tube thickness | 1.5 mm |
| Base plate thickness | 5 mm |


L1:

BG0800CS: 738 mm


BG0850CS: 852 mm

BG0900CS: 738 mm

BG0800CS · BG0850CS · BG0900CS



BGC710CS

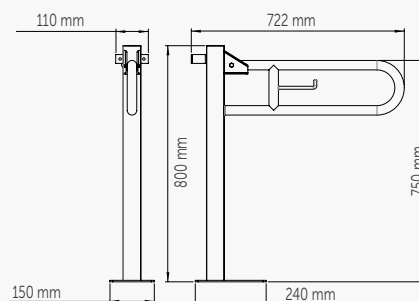

GRAB BARS AND OTHER ACCESSORIES

medinox AISI 304 stainless steel bars



BGA0820CS

vertical swing with floor support

material: AISI 304 stainless steel
finish: satin*



BG0089CS

horizontal swing

material: AISI 304 stainless steel
finish: satin*



BSI020CS

wall/floor mounted with 3 anchoring points

material: AISI 304 stainless steel
finish: satin*

BSD020CS

wall/floor mounted with 3 anchoring points

material: AISI 304 stainless steel
finish: satin*



*ALSO AVAILABLE IN BRIGHT FINISH

BGA0820CS · BG0089CS · BSI020CS · BSD020CS COMPONENTS AND MATERIALS

- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of surface and the supports used

BGA0820CS · BG0089CS

- Toilet roll holder hook
- Safety anchoring system that blocks the bar in a perpendicular position to the wall, preventing it from turning accidentally

BGA0820CS

- Opening system that transfers the support to the floor on the bar downloads

BSI020CS · BSD020CS

- Snap flange cover for hidden mounting

BGA0820CS · BG0089CS · BSI020CS · BSD020CS TECHNICAL SPECIFICATIONS

BGA0820CS




| | |
|----------------------|--------|
| Bar | Ø32 mm |
| Bar thickness | 1.2 mm |
| Base plate thickness | 3 mm |

BG0089CS

| | |
|----------------------|--------|
| Bar | Ø32 mm |
| Bar thickness | 1.2 mm |
| Base plate thickness | 10 mm |

BSI020CS · BSD020CS

| | |
|-------------------|--------|
| Bar | Ø32 mm |
| Bar thickness | 1.5 mm |
| Snap flange cover | Ø82 mm |

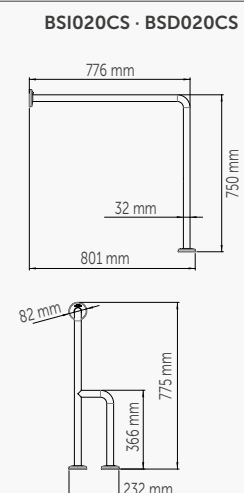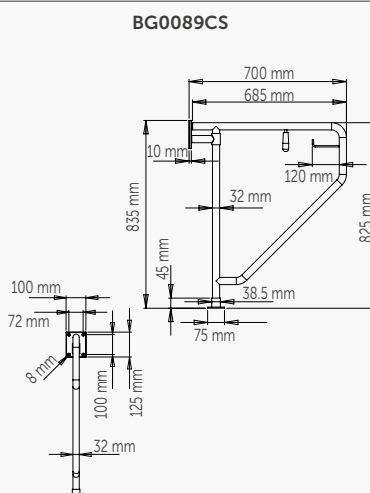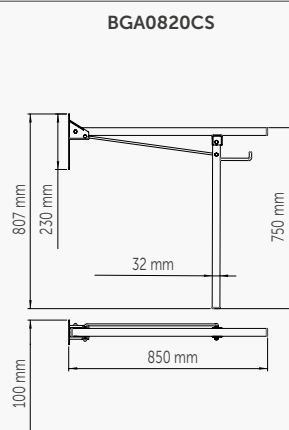

GRAB BARS AND OTHER ACCESSORIES

medinox AISI 304 stainless steel bars




BS0010CS

wall / floor mounted

material: AISI 304 stainless steel

finish: satin*



BFI600CS

wall - mounted with 3 anchoring points

BFD600CS

wall - mounted with 3 anchoring points

material: AISI 304 stainless steel

finish: satin*



***ALSO AVAILABLE IN BRIGHT FINISH**

BS0010CS · BFI600CS · BFD600CS COMPONENTS AND MATERIALS

BS0010CS · BFI600CS · BFD600CS


- Snap flange cover for hidden mounting
- Stainless steel nuts and bolts for masonry walls

- The strength of the bar support will depend on the type of wall and the supports used


BS0010CS · BFI600CS · BFD600CS TECHNICAL SPECIFICATIONS

| | |
|-------------------|--------|
| Bar | Ø32 mm |
| Tube thickness | 1.5 mm |
| Snap flange cover | Ø82 mm |

BS0010CS

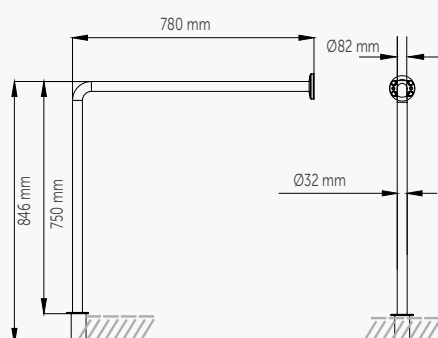

BFI600CS · BFD600CS

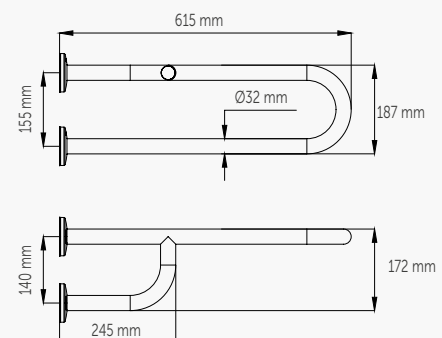

GRAB BARS AND OTHER ACCESSORIES

medinox AISI 304 stainless steel bars



BD0700CS


angled on 2 walls with 3 anchoring points

material: AISI 304 stainless steel

finish: satin*



***ALSO AVAILABLE
IN BRIGHT FINISH**



BTI090CS

angled on 2 walls with 3 anchoring points

BTD090CS

angled on 2 walls with 3 anchoring points

material: AISI 304 stainless steel

finish: satin



BA0130CS

130° angle

material: AISI 304 stainless steel

finish: satin*




BD0700CS · BTI090CS · BTD090CS · BA0130CS COMPONENTS AND MATERIALS

- Snap flange cover for hidden mounting
- One-piece structure that gives it enhanced stability and prevents dirt from building up
- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of wall and the supports used


BD0700CS · BTI090CS · BTD090CS · BA0130CS TECHNICAL SPECIFICATIONS

| | |
|-------------------|--------|
| Bar | Ø32 mm |
| Bar thickness | 1.5 mm |
| Snap flange cover | Ø82 mm |


BD0700CS

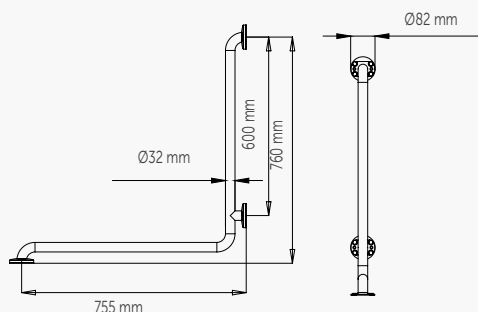

BTI090CS · BTD090CS

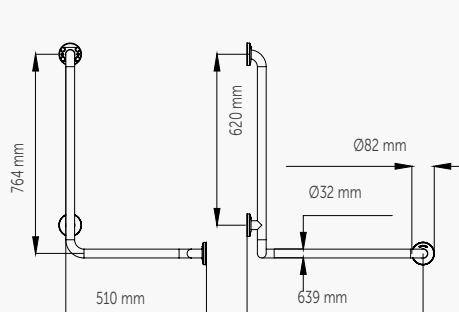


BA0130CS



GRAB BARS AND OTHER ACCESSORIES

mediepoxy AISI 304 stainless steel bars

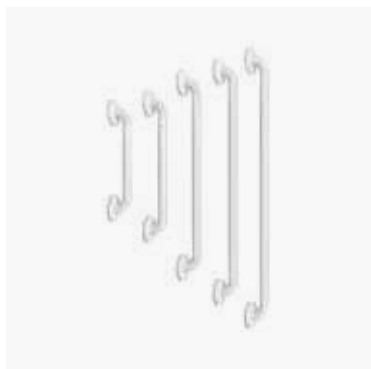

BR0300

length: 390 mm

BR0400

length: 540 mm

BR0600

length: 695 mm

BR0750


length: 845 mm

BR0900

length: 1000 mm - straight

material: steel

finish: white epoxy



BAI090

90° angle

BAD090

90° angle

material: steel

finish: white epoxy



BR0300 · BR0400 · BR0600 · BR0750 · BR0900 · BAI090 · BAD090 COMPONENTS AND MATERIALS

- Tube with anti-rust treatment
- Plastic snap flange cover for hidden mounting
- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of wall and the supports used


BR0300 · BR0400 · BR0600 · BR0750 · BR0900 · BAI090 · BAD090 TECHNICAL SPECIFICATIONS

| | |
|---------------------------|--------|
| Bar | Ø32 mm |
| Bar thickness | 1.5 mm |
| Plastic snap flange cover | Ø85 mm |


L1:

| | |
|---------|---------|
| BR0300: | 390 mm |
| BR0400: | 540 mm |
| BR0600: | 695 mm |
| BR0750: | 845 mm |
| BR0900: | 1000 mm |

BR0300 · BR0400 · BR0600 · BR0750 · BR0900



BAI090 · BAD090

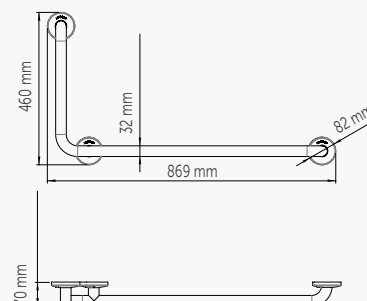

It is not recommended to install the mediepoxy line bars in places where it is in direct contact with water, in damp and/or chlorinated environments.

Mediclinics is not responsible for corrosion that may appear on the bars caused by abrasion on the anchorage points as a result of improper installation.

GRAB BARS AND OTHER ACCESSORIES

mediepoxy AISI 304 stainless steel bars



BG0800
vertical swing

BG0850
vertical swing

material: **steel**
finish: **white epoxy**



BGC710
vertical swing

material: **steel**
finish: **white epoxy**



BGA0820
drop-down with support

material: **steel**
finish: **white epoxy**



BS0010
wall / floor mounted

material: **steel**
finish: **white epoxy**



BG0800 · BG0850 · BGC710 · BGA0820 · BS0010 COMPONENTS AND MATERIALS

- Tube with anti-rust treatment
- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of wall and the supports used

BG0800 · BG0850 · BGC710

- Toilet roll holder hook
- The rotating point is strengthened with a double tube for maximum resistance
- Safety system that blocks the bar in a vertical position to

prevent it dropping accidentally

BGA0820


- Opening system that transfers the support to the floor on moving the bar downwards
- Safety system that blocks the bar in a vertical position to prevent it dropping accidentally

BS0010

- Built into the floor at 96 mm

BG0800 · BG0850 · BGC710 · BGA0820 · BS0010 TECHNICAL SPECIFICATIONS

| | | |
|---------------|--------|----------------------------------|
| Bar | Ø32 mm | BS0010 |
| Bar thickness | 1.5 mm | Plastic snap flange cover Ø85 mm |

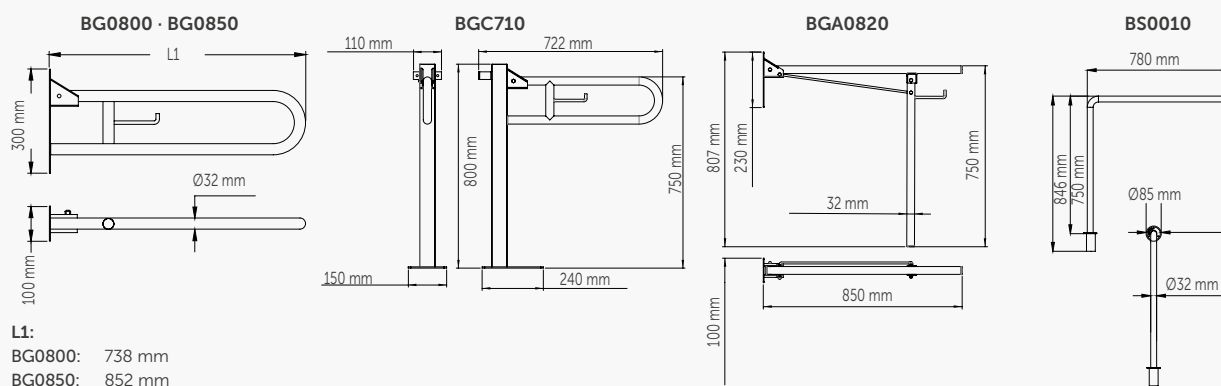

It is not recommended to install the mediepoxy line bars in places where it is in direct contact with water, in damp and/or chlorinated environments.

Mediclinics is not responsible for corrosion that may appear on the bars caused by abrasion on the anchorage points as a result of improper installation.

GRAB BARS AND OTHER ACCESSORIES

mediepoxy AISI 304 stainless steel bars



BFI600

wall-mounted with 3 anchoring points

BFD600

wall-mounted with 3 anchoring points

material: **steel**

finish: **white epoxy**



BD0700

angled on 2 walls with 3 anchoring points

material: **steel**

finish: **white epoxy**



BA0130

130° angle

material: **steel**

finish: **white epoxy**




BFI600 · BFD600 · BD0700 · BA0130 COMPONENTS AND MATERIALS

- Tube with anti-rust treatment
- Snap flange cover for hidden mounting
- Stainless steel nuts and bolts for masonry walls
- The strength of the bar support will depend on the type of wall and the supports used


BFI600 · BFD600 · BD0700 · BA0130 TECHNICAL SPECIFICATIONS

| | |
|---------------------------|--------|
| Bar | Ø32 mm |
| Bar thickness | 1.5 mm |
| Plastic snap flange cover | Ø85 mm |


BFI600 · BFD600

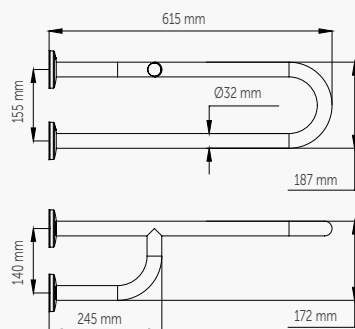

BD0700

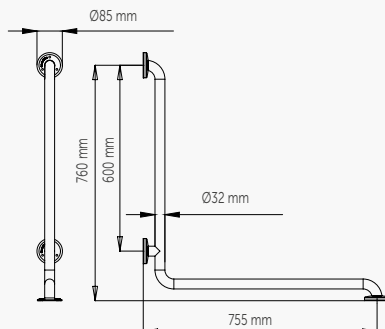

BA0130

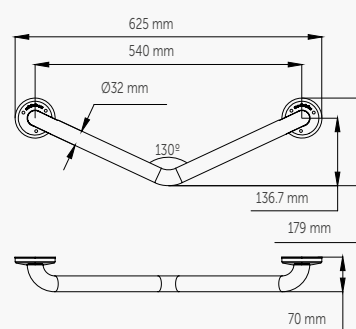










It is not recommended to install the mediepoxy line bars in places where it is in direct contact with water, in damp and/or chlorinated environments.

Mediclinics is not responsible for corrosion that may appear on the bars caused by abrasion on the anchorage points as a result of improper installation.

GRAB BARS AND OTHER ACCESSORIES

table of grab bars



| | | | MATERIAL / FINISH | | ELECTRICALLY INSULATED | SNAP FLANGE COVER | NUTS AND BOLTS INCLUDED |
|---|--|-----------|--------------------------------|-------------------|------------------------|-------------------|-------------------------|
| | | | AISI 304 Stainless steel satin | Steel White epoxy | | | |
| grab bars | | | | | | | |
|  | STRAIGHT | MEDINOX | ● | | ● | ● | ● |
| | | MEDIEPOXY | | ● | ● | ● | ● |
|  | 90° ANGLE | MEDINOX | ● | | ● | ● | ● |
| | | MEDIEPOXY | | ● | ● | ● | ● |
|  | SWING VERTICAL | MEDINOX | ● | | ● | | ● |
| | | MEDIEPOXY | | ● | ● | | ● |
|  | SWING HORIZONTAL | MEDINOX | ● | | ● | | ● |
|  | WALL/FLOOR THREE ANCHORING POINTS | MEDINOX | ● | | ● | ● | ● |
| | | MEDIEPOXY | | ● | ● | ● | ● |
|  | TO THE WALL RECESSED FLOOR | MEDINOX | ● | | ● | ● | ● |
| | | MEDIEPOXY | | ● | ● | ● | ● |
|  | TO THE WALL THREE ANCHORING POINTS | MEDINOX | ● | | ● | ● | ● |
| | | MEDIEPOXY | | ● | ● | ● | ● |
|  | ANGLE TWO WALLS (THREE ANCHORING POINTS) | MEDINOX | ● | | ● | ● | ● |
| | | MEDIEPOXY | | ● | ● | ● | ● |
|  | 130°/135° ANGLE | MEDINOX | ● | | ● | ● | ● |
| | | MEDIEPOXY | | ● | ● | ● | ● |

GRAB BARS AND OTHER ACCESSORIES

seats



AM0100

folding seat with wall support

material: AISI 304 stainless steel / phenolic sheet
finish: **satín** / **white ivory**



AM0201C

folding seat

material: AISI 304 stainless steel
finish: **bright**

AM0201CS

folding seat

material: AISI 304 stainless steel
finish: **satín**



AM0100 · AM0201C · AM0201CS COMPONENTS AND MATERIALS

AM0100

- Seat in non-porous delamination-proof phenolic sheet
- Deters fungi and bacteria
- Non-slip and warm to the touch
- Slots for water drainage

AM0100 · AM0201C · AM0201CS

- The strength of the seat support will depend on the type of wall and the supports used

AM0100 · AM0201C · AM0201CS TECHNICAL SPECIFICATIONS



AM0100

| | |
|------------------------------|--------|
| Tube | Ø25 mm |
| Tube thickness | 1.6 mm |
| Thickness of phenolic sheets | 8 mm |


AM0201C · AM0201CS

| | |
|-----------------|--------|
| Tube | Ø32 mm |
| Sheet thickness | 1.7 mm |

AM0100

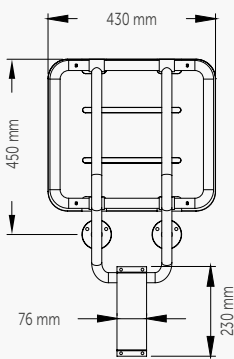

AM0201C · AM0201CS



GRAB BARS AND OTHER ACCESSORIES

seats



AM0251C

folding seat with floor support

material: **AISI 304 stainless steel**

finish: **bright**

AM0251CS

folding seat with floor support

material: **AISI 304 stainless steel**

finish: **satin**



AM0500

reversible, folding seat with floor support

material: **AISI 304 stainless steel / phenolic sheet**

finish: **satin / white ivory**



AM0251C · AM0251CS · AM0500 COMPONENTS AND MATERIALS

AM0251C · AM0251CS

- Slots for water drainage
- Opening system that moves the support to the floor on swinging the seat down
- The bending process guarantees that the diameter is uniform on curves
- Recommended installation height of 470 mm at the top

AM0500

- Tube to prevent oxidation
- Vinyl-coated structure, biocompatible and non-allergenic


- The bending process guarantees that the diameter is uniform on curves
- Electrically isolated
- Stainless steel bolts for masonry walls
- Seat in non-porous delamination-proof phenolic sheet
- Deters fungi and bacteria
- Slots for water drainage
- The strenght of the seat support will depend on the type of wall and the supports used
- Reversible seat mounted left or right

AM0251C · AM0251CS · AM0500 TECHNICAL SPECIFICATIONS

AM0251C · AM0251CS

| | |
|-----------------|---------|
| Tube | Ø 32 mm |
| Sheet thickness | 1.7 mm |


AM0251C · AM0251CS

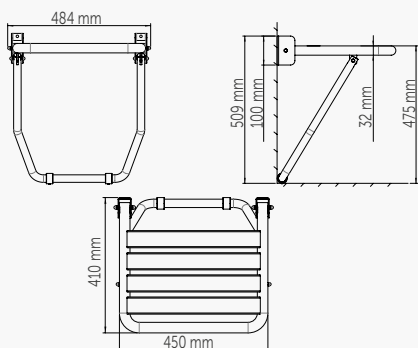

AM0500

| | |
|----------------|---------|
| Tube | Ø 25 mm |
| Tube thickness | 1.6 mm |

AM0500

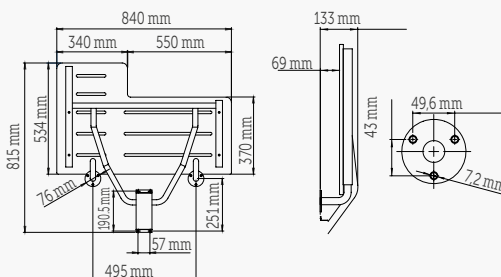

GRAB BARS AND OTHER ACCESSORIES

mirrors





EP0350CS
fixed mirror 700 x 500 mm

EP0450CS
fixed mirror 800 x 600 mm

material: **AISI 304 stainless steel**
finish: **satin**

EP0350CS · EP0450CS COMPONENTS AND MATERIALS

- One-piece frame made of AISI 304 stainless steel
- Backed with medium density fibre waterproof board that reinforces the glass, making it stronger
- 5 mm glass mirror

EP0350CS · EP0450CS TECHNICAL SPECIFICATIONS

| | |
|-----------------|------|
| Frame thickness | 1 mm |
| Glass thickness | 5 mm |


EP0350CS

| | |
|----|--------|
| L1 | 500 mm |
| L2 | 700 mm |

EP0450CS

| | |
|----|--------|
| L1 | 600 mm |
| L2 | 800 mm |

EP0350CS · EP0450CS

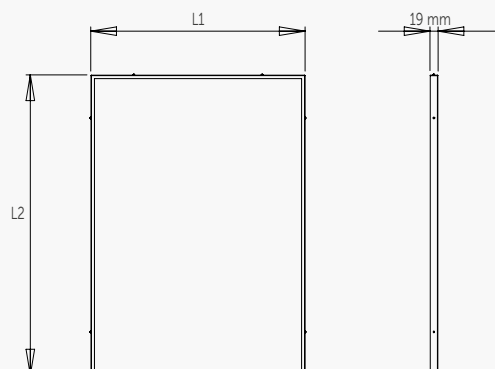

GRAB BARS AND OTHER ACCESSORIES

mirrors





NEW

EP0300
pivoting mirror 700 x 500 mm

material: **steel**
finish: **white epoxy**



NEW

EP0300CS
pivoting mirror 700 x 500 mm

EP0400CS
pivoting mirror 800 x 600 mm

material: **AISI 304 stainless steel**
finish: **satin**

EP0300 · EP0300CS · EP0400CS COMPONENTS AND MATERIALS

- One-piece frame made of steel (EP0300) or stainless steel (EP0300CS · EP0400CS)
- Backed with medium density fibre waterproof board that reinforces the glass, making it stronger
- Pivoting system that allows to tilt the mirror
- Glass fitted with silicon on the frame
- 5 mm glass mirror


EP0300 · EP0300CS · EP0400CS TECHNICAL SPECIFICATIONS


| | |
|-----------------|--------|
| Frame thickness | 1.5 mm |
| Glass thickness | 5 mm |

| | |
|--------------------------|--------|
| EP0300 · EP0300CS | |
| L1 | 700 mm |
| L2 | 500 mm |

| | |
|-----------------|--------|
| EP0400CS | |
| L1 | 800 mm |
| L2 | 600 mm |

EP0300 · EP0300CS · EP0400CS

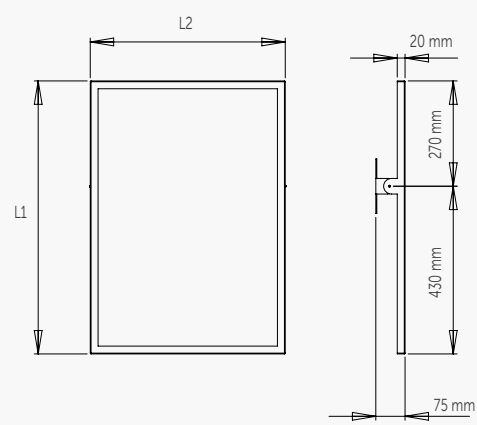

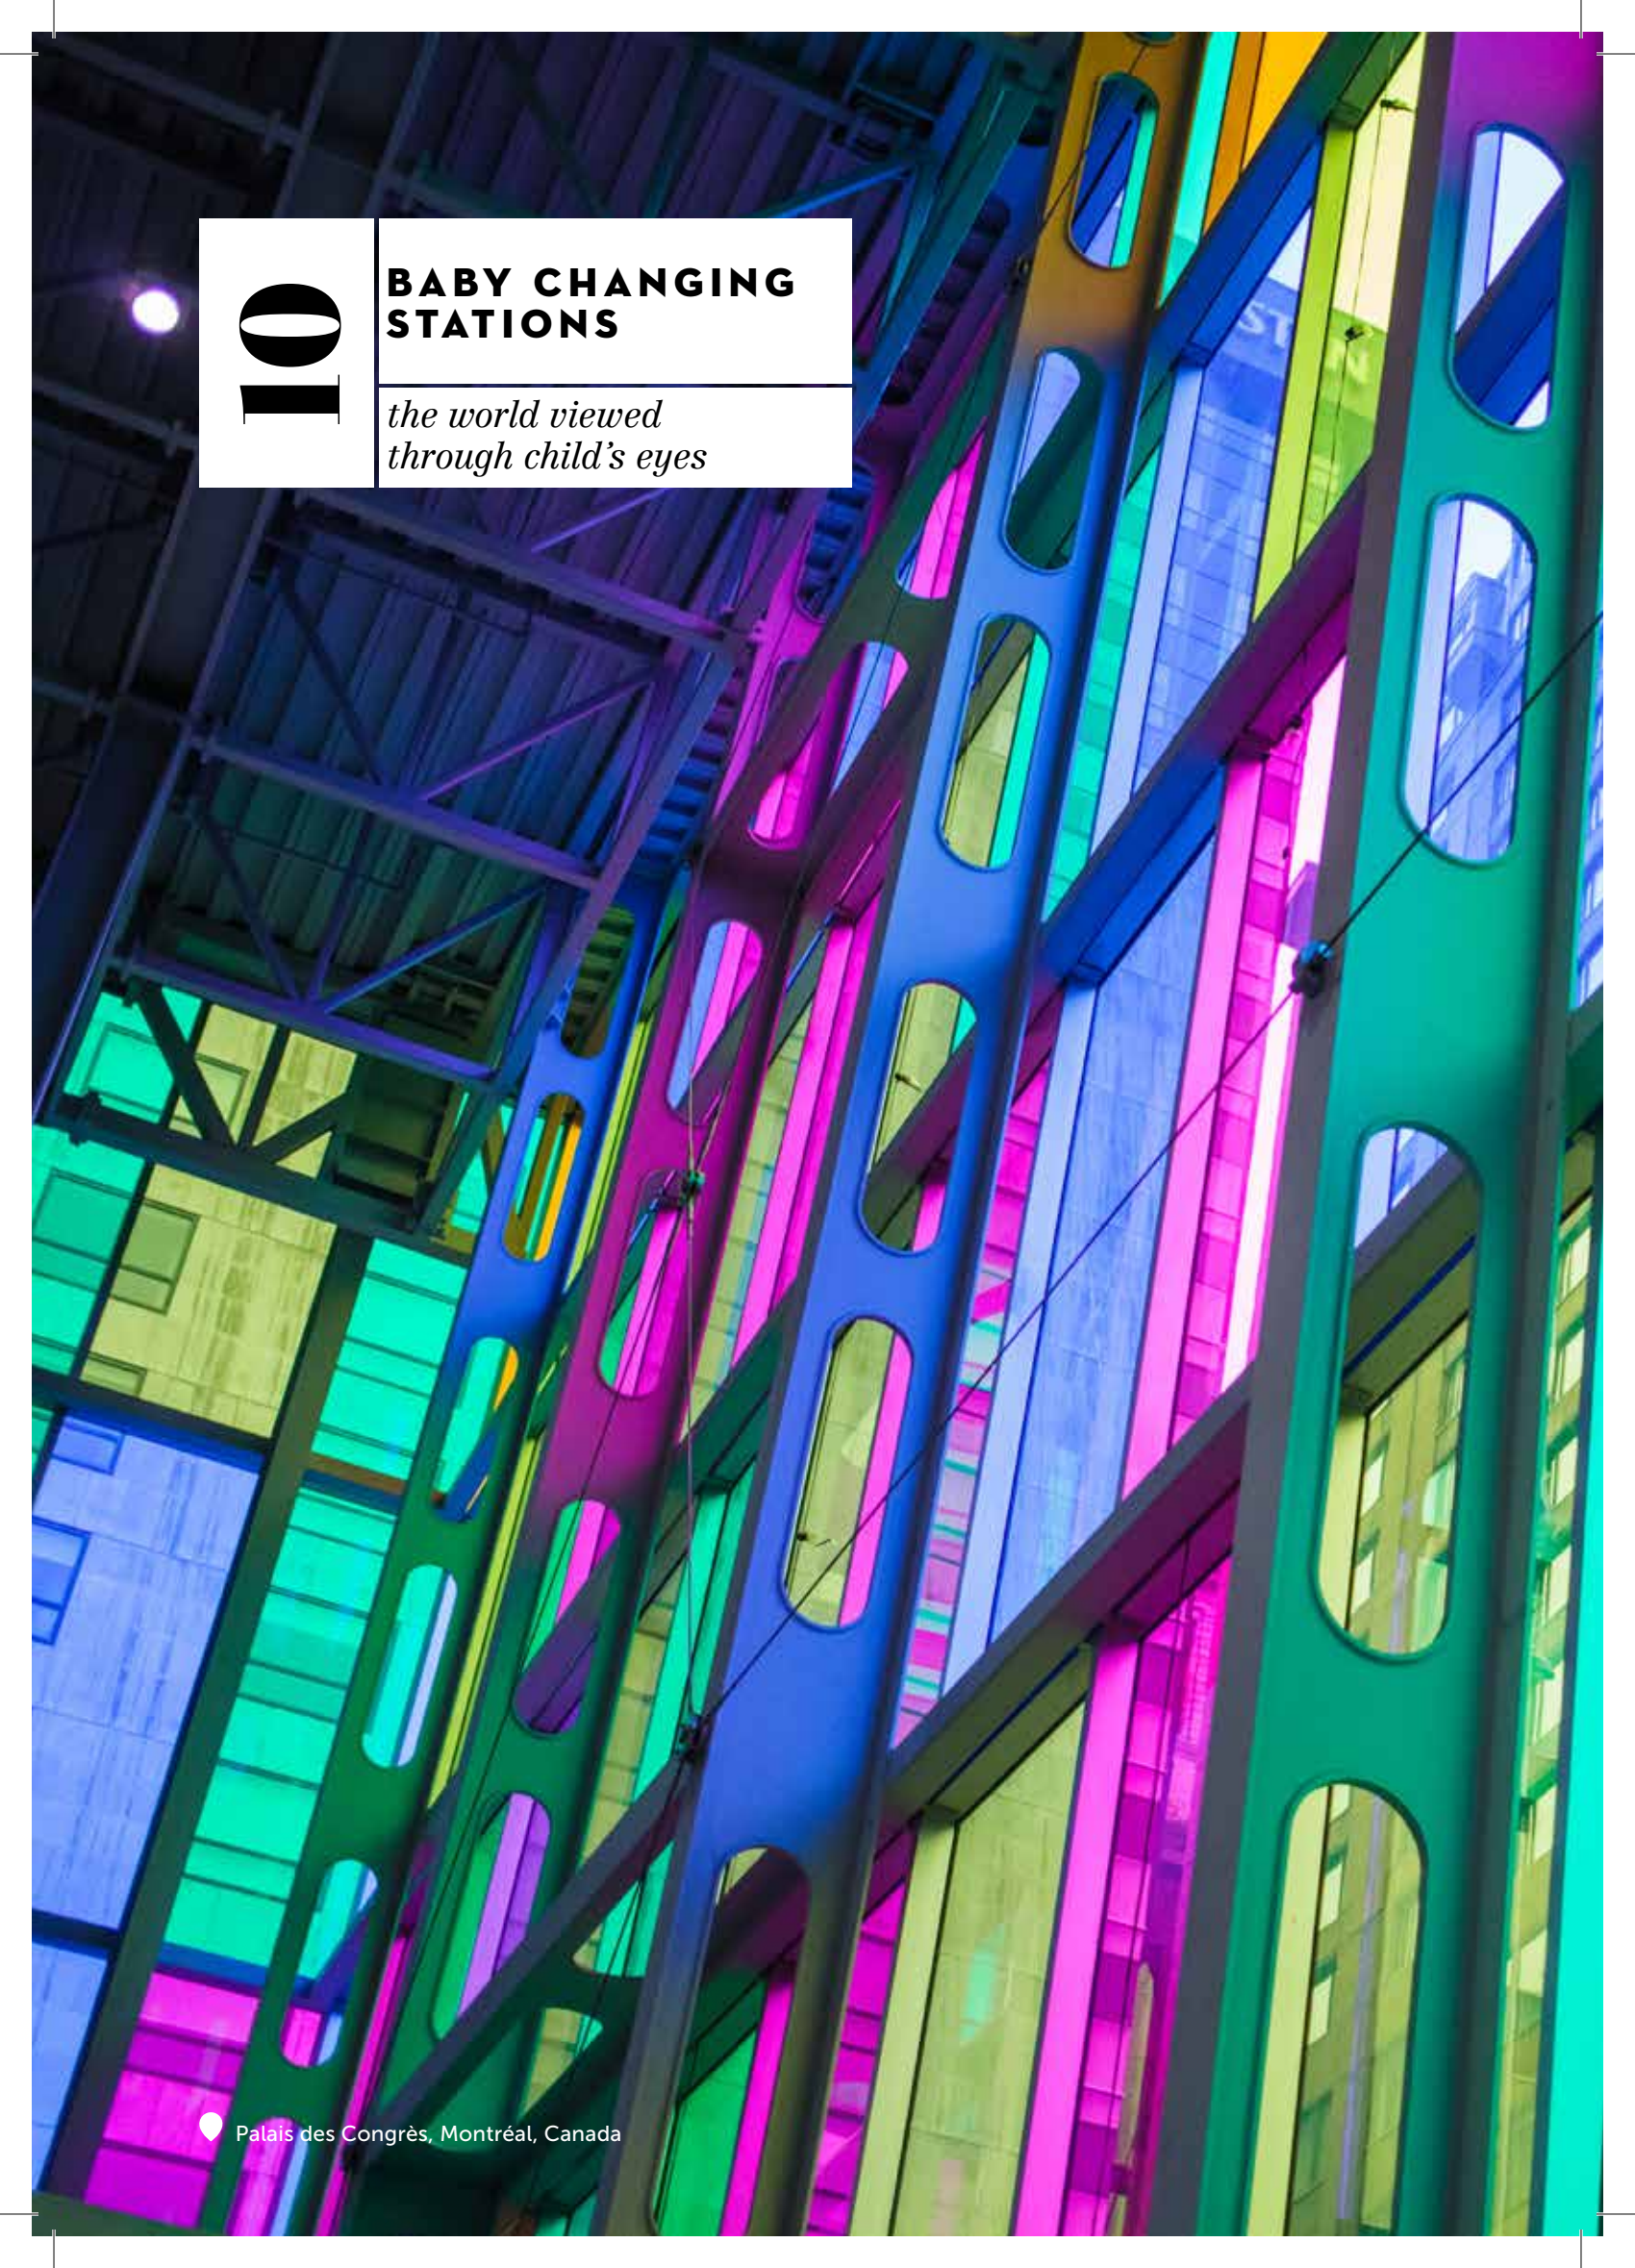

10

BABY CHANGING STATIONS

*the world viewed
through child's eyes*



SOLUTIONS FOR BABIES AND CHILDREN SAFETY

The world seen through the eyes of the youngest children takes on another dimension with the Mediclinics solutions in this safety line for babies.

- Mediclinics' baby changing stations are manufactured under strict quality and safety standards and offer a wide range of safe, practical, functional and hygienic solutions for younger children.
- Vibrant and fun spaces to make the daily hygiene habits of babies a cheerful but also healthy time.



BABY CHANGING STATIONS babymedi

horizontal



CP0016H

material: **polypropylene**
finish: **white**



CP0016HCS

material: **polypropylene / stainless steel**
finish: **satin**



AVAILABLE IN SEPTEMBER 2016

CP0016H · CP0016HCS COMPONENTS AND MATERIALS

- Changing surface (bed) made of polypropylene with Biocote® antimicrobial additive embedded into its own surface, promoting an easy cleaning and inhibiting the growth of odor causing and staining microbes
- The open/close mechanism of the bed is always concealed to the user's view and it consists on a pair of reinforced hinges and a pneumatic cylinder, ensuring a high durability and a smooth open and close of the baby changing station
- One-piece easy-mounting chassis made of galvanized steel with the corresponding mounting hardware included, making very easy the installation of the unit to the wall
- 1,900 cm² contoured changing surface area with child protection straps made of nylon, providing a complete safety for the baby
- Bed with a pair of bag hooks (one at the right side and the other one at the left), helping to keep personal belongings close and at hand
- Liner dispenser with lock made of polypropylene, holds

- approximately 40 bed liners, minimizing operator refills and discouraging potential vandalism
- The design and manufacture of this baby changing station is according to the latest version of the EN 12221-1 ("Child use and care articles. Changing units for domestic use. Safety requirements") and EN 12221-2 ("Child use and care articles. Changing units for domestic use. Test methods") standards, assuring that the baby changing station is totally safety
- The baby changing station has been designed to hold a total weight much higher than the minimum established by the EN 12221-1 and the EN 12221-2 standards.


CP0016HCS

- One-piece frontal chassis made in AISI 304 stainless steel, 0.8 mm thick, fixed to the bottom of the bed by means of 4 bolts and 4 nuts, always concealed to the user's view, without joints or edges for increasing the user safety, a better cleaning and an easy integration with other satin-finish accessories in the restroom

Warning: To ensure that the unit supports the intended loads, baby changing station must be properly installed according to the Mediclinics' instructions.

CP0016H · CP0016HCS TECHNICAL SPECIFICATIONS

| | |
|---------------------------------|------------------------|
| Dimensions | 860 x 570 x 100 mm |
| Weight (empty) | 10 Kg |
| Liner dispenser capacity | 80 u. |
| Recommended installation height | 800 mm at lowest point |
| Recommended installation height | 700 mm at lowest point |

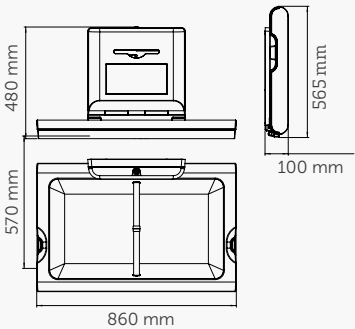


BABY CHANGING STATIONS babymedi

vertical



CP0016V

material: **polypropylene**
finish: **white**

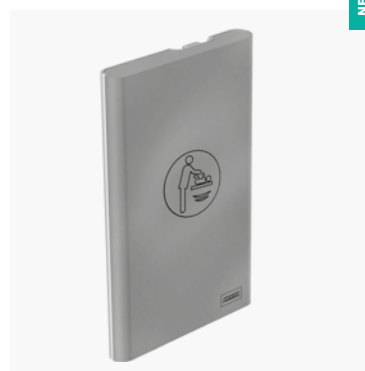

CP0016VCS

material: **polypropylene / stainless steel**
finish: **satin**



AVAILABLE 2017

CP0016V · CP0016VS COMPONENTS AND MATERIALS

- Changing surface (bed) made of polypropylene with Biocote® antimicrobial additive embedded into its own surface, promoting an easy cleaning and inhibiting the growth of odor causing and staining microbes
- The open/close mechanism of the bed is always concealed to the user's view and it consists on a pair of reinforced hinges and a pneumatic cylinder, ensuring a high durability and a smooth open and close of the baby changing station
- One-piece easy-mounting chassis made of galvanized steel with the corresponding mounting hardware included, making very easy the installation of the unit to the wall
- 1,900 cm² contoured changing surface area with child protection straps made of nylon, providing a complete safety for the baby
- Bed with one bag hook (located in the front part of the bed), helping to keep personal belongings close and at hand
- Liner dispenser with lock made of polypropylene, holds approximately 40 bed liners, minimizing operator refills and discouraging potential vandalism
- The design and manufacture of this baby changing station is according to the latest version of the EN 12221-1 ("Child use and care articles. Changing units for domestic use. Safety requirements") and EN 12221-2 ("Child use and care articles. Changing units for domestic use. Test methods") standards, assuring that the baby changing station is totally safety
- The baby changing station has been designed to hold a total weight much higher than the minimum established by the EN 12221-1 and the EN 12221-2 standards


CP0016VCS

- One-piece frontal chassis made in AISI 304 stainless steel, fixed to the bottom of the bed by means of 4 bolts and 4 nuts, always concealed to the user's view, without joints or edges for increasing the user safety, a better cleaning and an easy integration with other satin-finish accessories in the restroom

Warning: To ensure that the unit supports the intended loads, baby changing station must be properly installed according to the Mediclinics' instructions.

CP0016V · CP0016VS TECHNICAL SPECIFICATIONS


| | |
|---------------------------------|------------------------|
| Dimensions | 875 x 553 x 100 mm |
| Liner dispenser capacity | 80 u. |
| Recommended installation height | 800 mm at lowest point |
| Recommended installation height | 700 mm at lowest point |





STAINLESS STEEL SANITARY WARE

*sturdiness is not at
odds with beauty*

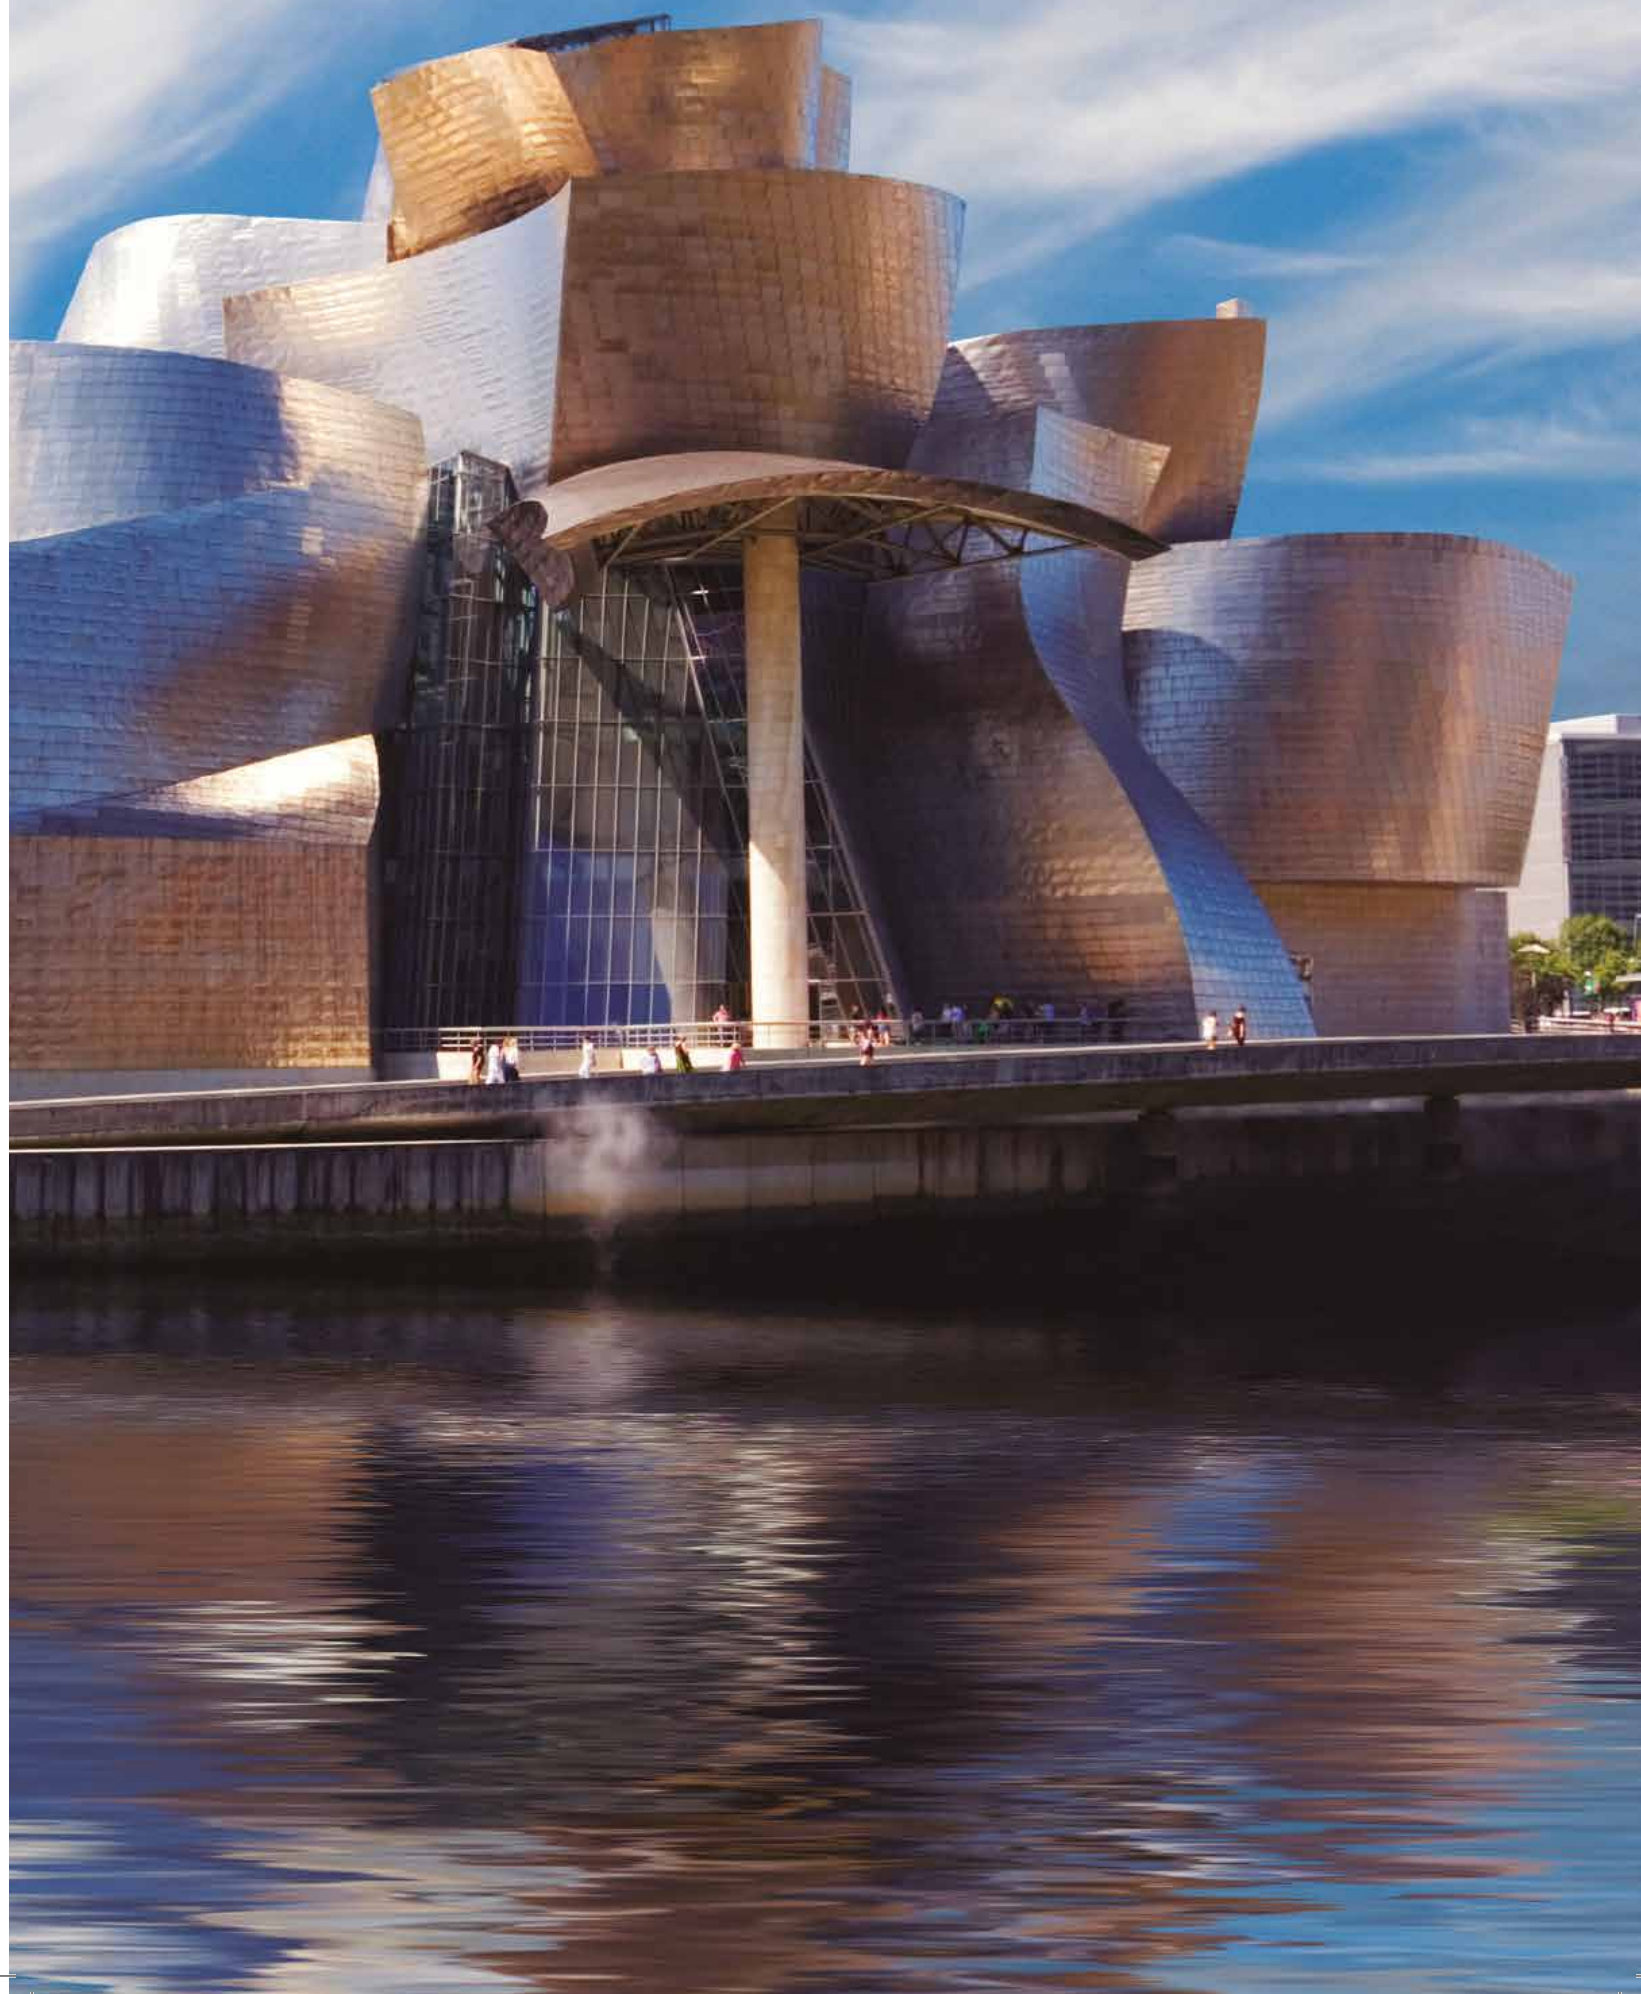




STAINLESS STEEL SANITARY WARE

Stainless steel sanitary products with an innovative, elegant and above all very robust and vandal proof design.

- Vandal proof and manufactured in AISI 304 stainless steel, Mediclinics has a wide range of stainless steel sanitary products, ideal for installing in schools, penitentiaries, stadiums, concert halls, discotheques etc.
- Our lavatories, toilets, urinals, sinks, shower trays, squat toilets, etc. are robust and durable and are designed to satisfy the needs of a market that demands equipment with an up-to-date, functional and vandal proof design for the toilet facilities.
- Mediclinics stainless steel sanitary products requires minimum maintenance, and so contributes to the reduction in building service and maintenance costs.


STAINLESS STEEL **SANITARY WARE**

wash basin - recessed




**SN0027C
SN0031C
SN0036C**
recessed sink

material: **AISI 304 stainless steel**
finish: **bright**




**SN0027CS
SN0031CS
SN0036CS**
recessed sink

material: **AISI 304 stainless steel**
finish: **satin**




**SNR027C
SNR031C
SNR036C**
recessed sink with overflow

material: **AISI 304 stainless steel**
finish: **bright**




**SNR027CS
SNR031CS
SNR036CS**
recessed sink with overflow

material: **AISI 304 stainless steel**
finish: **satin**



KTR100
overflow kit

material: **AISI 304 stainless steel**
finish: **satin**



SN0027C/CS · SN0031C/CS · SN0036C/CS · SNR027C/CS · SNR031C/CS · SNR036C/CS

COMPONENTS AND MATERIALS

SN0027C/CS · SN0031C/CS · SN0036C/CS · SNR027C/CS
SNR031C/CS · SNR036C/CS

- One-piece construction
- Vandal-proof finishes

SNR027CS · SNR031CS · SNR036CS · SNR027C · SNR031C
SNR036C

- With overflow hole

SN0027C/CS · SN0031C/CS · SN0036C/CS · SNR027C/CS · SNR031C/CS · SNR036C/CS

TECHNICAL SPECIFICATIONS

SN0027C/CS · SN0031C/CS

SN0036C/CS · SNR027C/CS

SNR031C/CS · SNR036C/CS

Steel thickness 1.2 mm

SN0027C/CS · SNR027C/CS

Weight 0.55 Kg

SN0031C/CS · SNR031C/CS


Weight 0.75 Kg

SN0036C/CS · SNR036C/CS

Weight 0.95 Kg

SNR027C/CS · SNR031C/CS ·
SNR036C/CS


Overflow Ø 30 mm

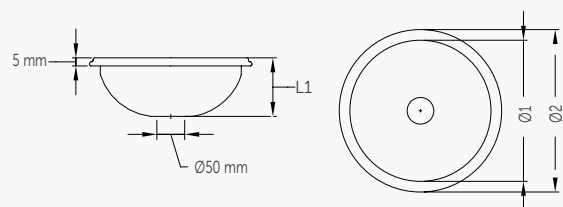

| | L1 | Ø1 | Ø2 |
|----------------------------|--------|--------|--------|
| SN0027C/27CS-SNR027C/27CS: | 110 mm | 265 mm | 305 mm |
| SN0031C/31CS-SNR031C/31CS: | 130 mm | 315 mm | 355 mm |
| SN0036C/36CS-SNR036C/36CS: | 145 mm | 355 mm | 405 mm |


STAINLESS STEEL **SANITARY WARE**

wash basin / wall mounted




SN0300CS
triple sink

material: **AISI 304 stainless steel**
finish: **satin**



SN0200CS
double sink

material: **AISI 304 stainless steel**
finish: **satin**

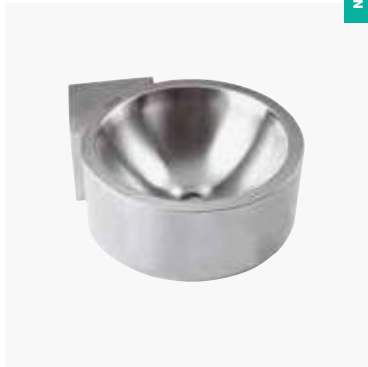

SNLM44CS
corner sink

material: **AISI 304 stainless steel**
finish: **satin**

SN0300CS · SN0200CS · SNLM44CS COMPONENTS AND MATERIALS

SN0300CS · SN0200C · SNLM44CS

- One-piece body
- Vandal-proof finishes

SNLM44CS

- Bright finish optional

SN0300CS · SN0200CS

- Optional siphon and waste pipe valve set

SN0300CS · SN0200CS · SNLM44CS TECHNICAL SPECIFICATIONS

SN00300CS · SN00200CS

Stainless steel thickness 1.5 mm

SNLM44CS

Stainless steel thickness 1 mm

SN0300CS

Weight 22.1 Kg

SN0200CS

Weight 15.5 Kg

SNLM44CS


Weight 3.1 Kg

SN0300CS · SN0200CS

Waste pipe Ø 50 mm


SNLM44CS

Waste pipe Ø 45 mm

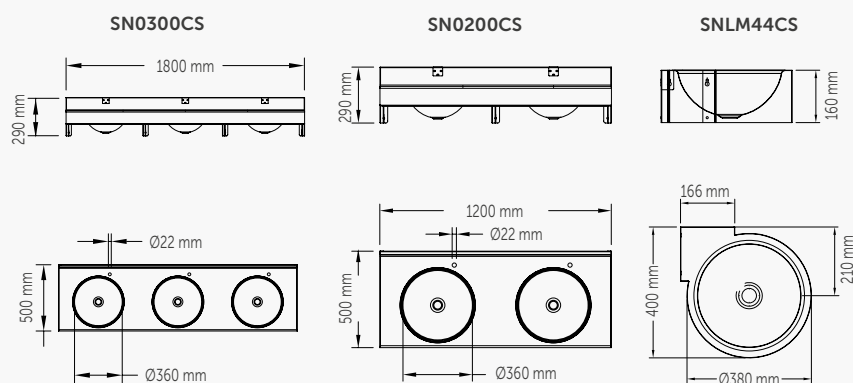


STAINLESS STEEL **SANITARY WARE**

wash basin / wall mounted




SNLM42CS

material: **AISI 304 stainless steel**
finish: **satin**



SNLM38CS

material: **AISI 304 stainless steel**
finish: **satin**

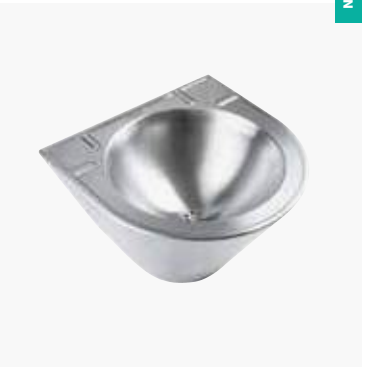

SNLM36CS

material: **AISI 304 stainless steel**
finish: **satin**

SNLM42CS · SNLM38CS · SNLM36CS COMPONENTS AND MATERIALS

SNLM42CS · SNLM38CS · SNLM36CS

- One-piece body
- Vandal-proof finishes
- Bright finish, optional
- If it is required, a drill can be performed to install an over-flow kit

SNLM36CS

- Soundproofing inner foam
- Inspection inner door for its installation

SNLM42CS · SNLM38CS · SNLM36CS TECHNICAL SPECIFICATIONS

SNLM42CS

| | |
|---------------------------|---------|
| Stainless steel thickness | 1 mm |
| Waste pipe diameter | Ø 45 mm |
| Weight | 3.1 Kg |

SNLM38CS · SNLM36CS

| | |
|---------------------------|--------|
| Stainless Steel thickness | 1.5 mm |
|---------------------------|--------|

SNLM38CS


| | |
|--------|--------|
| Weight | 2.5 Kg |
|--------|--------|

SNLM36CS

| | |
|--------|------|
| Weight | 8 Kg |
|--------|------|


SNLM38CS · SNLM36CS

| | |
|---------------------|---------|
| Waste pipe diameter | Ø 45 mm |
|---------------------|---------|

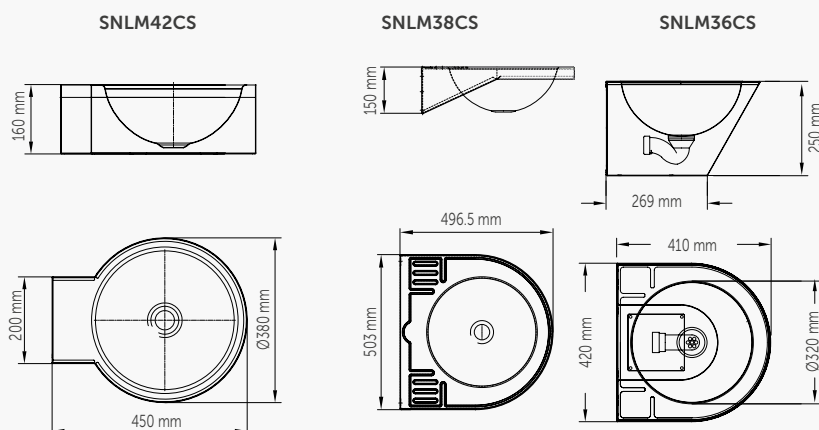

STAINLESS STEEL **SANITARY WARE**
wash basin / wall mounted

NEW




SNLM35C


material: **AISI 304 stainless steel**
finish: **bright**


.....

SNLM35CS

material: **AISI 304 stainless steel**
finish: **satin**







SNLM35C · SNLM35CS COMPONENTS AND MATERIALS


SNLM35C · SNLM35CS

- Perimetral bottom cover that hides the drainage system

SNLM35C · SNLM35CS TECHNICAL SPECIFICATIONS

| SNLM35C · SNLM35CS | |
|---------------------------|---------|
| Stainless steel thickness | 2 mm |
| Waste pipe | Ø 50 mm |
| Weight | 5 Kg |

SNLM35C · SNLM35CS

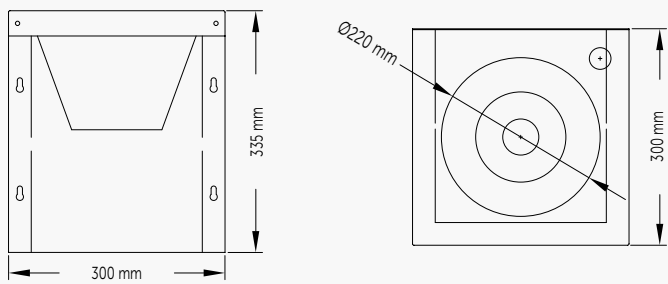

STAINLESS STEEL **SANITARY WARE**

shower trays

NEW



SN0800CS

material: **AISI 304 stainless steel**
finish: **satin**

✓ ✕ ⚠

NEW



SN0700CS

material: **AISI 304 stainless steel**
finish: **satin**

✓ ✕ ⚠

SN0800CS · SN0700CS COMPONENTS AND MATERIALS

SN0800CS · SN0700CS

- One-piece boy
- Vandal-proof finishes
- Recessed model
- Non-slip system

SN0800CS

- Adjustable horizontal outlet siphon (optional)

SN0700CS

- Horizontal siphon valve (optional)

SN0800CS · SN0700CS TECHNICAL SPECIFICATIONS

SN0800CS · SN0700CS


| | |
|---------------------------|------|
| Stainless steel thickness | 1 mm |
|---------------------------|------|

SN0800CS

| | |
|------------|---------|
| Waste pipe | Ø 90 mm |
| Weight | 5.9 Kg |


SN0700CS

| | |
|------------|---------|
| Waste pipe | Ø 40 mm |
| Weight | 5.3 Kg |

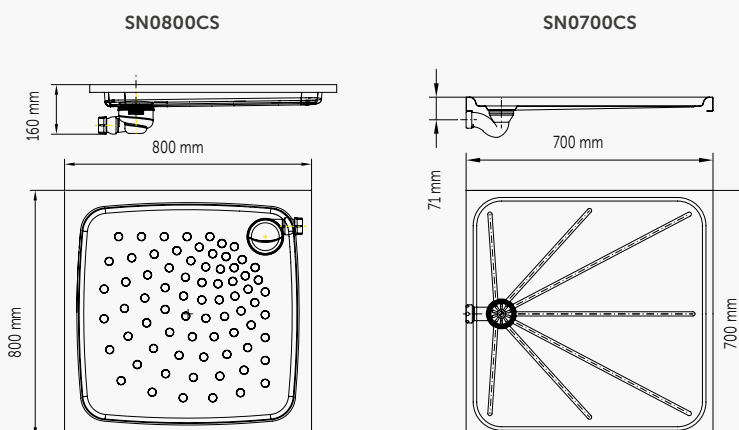

STAINLESS STEEL **SANITARY WARE**

urinals

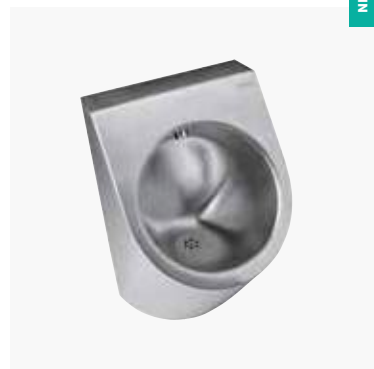


SNU108C

material: **AISI 304 stainless steel**
finish: **bright**

SNU108CS

material: **AISI 304 stainless steel**
finish: **satin**

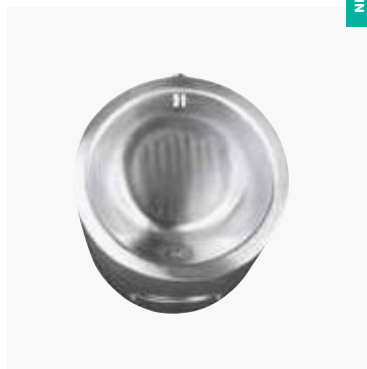


SNU106C

material: **AISI 304 stainless steel**
finish: **bright**

SNU106CS

material: **AISI 304 stainless steel**
finish: **satin**

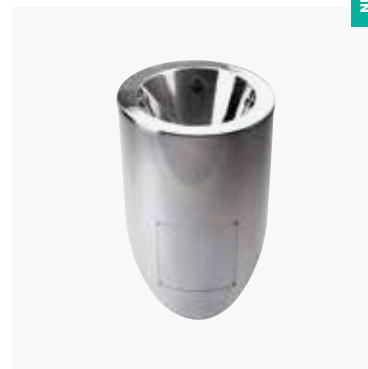

SNU104C

material: **AISI 304 stainless steel**
finish: **bright**

SNU104CS

material: **AISI 304 stainless steel**
finish: **satin**



SNU108C · SNU108CS · SNU106C · SNU106CS · SNU104C · SNU104CS COMPONENTS AND MATERIALS

SNU108C/CS · SNU106C/CS · SNU104C/CS

- One-piece body
- Vandal-proof finishes
- Inspection door for installation
- Suitable for mains flush with timer or tap

SNU108C/CS · SNU106C/CS

- Siphon horizontal outlet
- Connection to mains inlet
- Water inlet for flush activation with cistern

SNU104C/CS

- Horizontal waste pipe outlet
- Water inlet for flush activation with cistern

SNU108C · SNU108CS · SNU106C · SNU106CS · SNU104C · SNU104CS TECHNICAL SPECIFICATIONS

SNU108C/CS · SNU106C/CS · SNU104C/CS

Stainless steel thickness 1.5 mm

SNU108C · SNU108CS

Waste pipe Ø 40 mm

Weight 7.9 Kg

SNU106C · SNU106CS

Waste pipe Ø 40 mm



Weight 6.4 Kg

SNU104C · SNU104CS



Waste pipe Ø 50 mm

Weight 6.2 Kg



SNU108C · SNU108CS



SNU106C · SNU106CS




SNU104C · SNU104CS



STAINLESS STEEL **SANITARY WARE**

toilets

NEW



toilet seat not included


SN0110C

material: **AISI 304 stainless steel**
finish: **bright**

SN0110CS

material: **AISI 304 stainless steel**
finish: **satin**

NEW

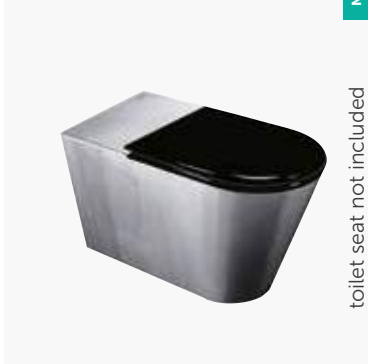

toilet seat not included


SN0105C

material: **AISI 304 stainless steel**
finish: **bright**

SN0105CS

material: **AISI 304 stainless steel**
finish: **satin**

NEW






toilet seat not included

SN0108C
wall mounted

material: **AISI 304 stainless steel**
finish: **bright**

SN0108CS
wall mounted

material: **AISI 304 stainless steel**
finish: **satin**






SN0110C · SN0110CS · SN0105C · SN0105CS · SN0108C · SN0108CS COMPONENTS AND MATERIALS

- One-piece body
 - Vandal-proof finishes
 - Inspection door for installation.
- SN0110C · SN0110CS · SN0105C · SN0105CS**
- Horizontal waste pipe. With the addition of a PVC elbow adapter the outlet can be vertical (PVC elbow adapter not included)
 - Floor installed
- SN0110C · SN0110CS**
- Cistern with dual flush (6 or 3 liters)
- Water inlet through the top side of the cistern, right or left, depending on the water installation
 - Water inlet to the lavatory pan from the bottom of the cistern
- SN0105C · SN0105CS · SN0108C · SN0108CS**
- Flush by means of a flushometer or a concealed cistern (flushometer or cistern not included)
- SN0108C · SN0108CS**
- Wall mounted
 - Horizontal waste pipe

SN0110C · SN0110CS · SN0105C · SN0105CS · SN0108C · SN0108CS TECHNICAL SPECIFICATIONS
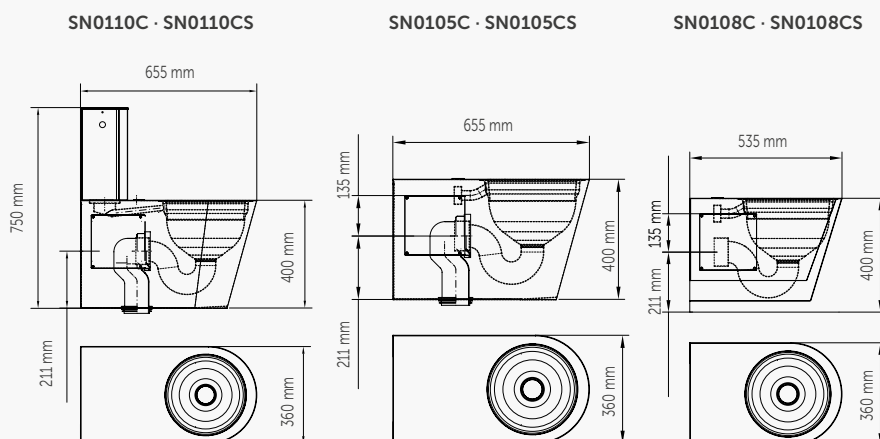
| SN0110C/CS · SN0105C/CS · SN0108C/CS | |
|--------------------------------------|-----------|
| Stainless steel thickness | 1.5 mm |
| Waste pipe | Ø 100 mm |
| Water inlet height | 400 mm |
| SN0110C · SN0110CS | |
| Water inlet | Ø 16.7 mm |
| Weight | 22 Kg |
| SN0105C · SN0105CS | |
| Water inlet | Ø 56 mm |
| Weight | 14 Kg |
| SN0108C · SN0108CS | |
| Water inlet | Ø 56 mm |
| Weight | 9.7 Kg |



STAINLESS STEEL **SANITARY WARE**

toilets / squatting pan



TP0130
seat with lit

material: **lacquered wood**
finish: **caoba colour**



TP0135
seat with lit

material: **lacquered wood**
finish: **black colour**



SNPT01C

material: **AISI 304 stainless steel**
finish: **bright**

SNPT01CS

material: **AISI 304 stainless steel**
finish: **satin**



TP0130 · TP0135 · SNPT01C · SNPT01CS COMPONENTS AND MATERIALS

SNPT01C · SNPT01CS


- One-piece body
- Vandal-proof finishes
- Two frontal flush nozzles to clean the squatting pan
- Recessed mounted
- Anti-slip surface
- Drain accessories not included

TP0130 · TP0135 · SNPT01C · SNPT01CS TECHNICAL SPECIFICATIONS

SNPT01C · SNPT01CS

| | |
|---------------------------|--------------------|
| Stainless steel thickness | 1-1.5 mm |
| Waste pipe | Ø 100 mm |
| Inlet | 2 inlets of 1 1/2" |
| Weight | 7.5 Kg |


TP0130 · TP0135



L1/L2:








TP0130: 415x360 mm
TP0135: 430x350 mm

SNPT01C · SNPT01CS



STAINLESS STEEL **SANITARY WARE**

Table

| | MODEL | MATERIAL | | INSTALLATION | | | | SUITABLE FOR | | | | |
|---|----------|-------------------------------|------------------------------|--------------|-----------------|--------------|-----------------|--|--------------------------------|--|---------------------------------|-------------------------------------|
| | | Stainless steel bright finish | Stainless steel satin finish | Recessed | Surface mounted | Wall mounted | Floor installed | Offices, official organisations, schools & similar | Gyms, sport centers & similars | Hospitals, health centers facilities, elderly care homes & similar | Hotels and other accommodations | Airports, shopping malls & similars |
|  | SN0027C | • | | • | | | | • | • | • | • | • |
| | SN0031C | • | | • | | | | • | • | • | • | • |
| | SN0036C | • | | • | | | | • | • | • | • | • |
| | SN0027CS | | • | • | | | | • | • | • | • | • |
| | SN0031CS | | • | • | | | | • | • | • | • | • |
| | SN0036CS | | • | • | | | | • | • | • | • | • |
|  | SNR027C | • | | • | | | | • | • | • | • | • |
| | SNR031C | • | | • | | | | • | • | • | • | • |
| | SNR036C | • | | • | | | | • | • | • | • | • |
| | SNR027CS | | • | • | | | | • | • | • | • | • |
| | SNR031CS | | • | • | | | | • | • | • | • | • |
| | SNR036CS | | • | • | | | | • | • | • | • | • |
|  | SN0300CS | | • | | • | | | • | | • | | • |
| | SN0200CS | | • | | • | | | • | | • | | • |
| | SNLM42CS | | • | | • | | | • | | • | | • |
| | SNLM44CS | | • | | • | | | • | | • | | |
| | SNLM38CS | | • | | • | | | • | | • | | |
| | SNLM36CS | | • | | • | | | • | | • | | |
|  | SNLM35C | • | | | | • | | • | | • | | • |
| | SNLM35CS | | • | | | • | | • | | • | | • |
|  | SN0800CS | | • | • | | | | • | • | • | • | |
| | SN0700CS | | • | • | | | | • | • | • | • | |
| | SNPT01C | • | | • | | | | | | • | • | |
| | SNPT01CS | | • | • | | | | | | • | • | |
|  | SNU104C | • | | | | • | | • | • | | | • |
| | SNU104CS | | • | | | • | | • | • | | | • |
| | SNU106C | • | | | | • | | • | • | | | • |
| | SNU106CS | | • | | | • | | • | • | | | • |
| | SNU108C | • | | | | • | | • | • | | | • |
| | SNU108CS | | • | | | • | | • | • | | | • |
|  | SNU105C | • | | | | | • | • | • | | • | • |
| | SNU105CS | | • | | | | • | • | • | | • | • |
| | SNU110C | • | | | | | • | • | • | | • | • |
| | SNU110CS | | • | | | | • | • | • | | • | • |
| | SN0108C | • | | | | • | | • | • | | • | • |
| | SN0108CS | | • | | | • | | • | • | | • | • |

12

DRINKING WATER FOUNTAINS

much more closer to nature






DRINKING WATER FOUNTAINS

Elegantly and robustly designed drinking water fountains.

- Mediclinics offers fountains directly connected to a water inlet made in AISI 304 stainless steel. Elegantly designed and strong fountains, designed for both interior and exterior locations.
- Ideal for installation in schools, office buildings, airports, hospitals, shopping centres, etc. Whatever you need, Mediclinics offers you the best solution.


DRINKING WATER FOUNTAINS

fountains

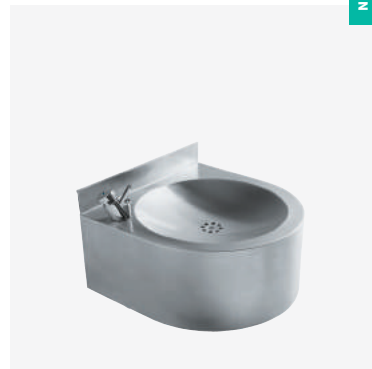


FAM110CS
wall fountain

material: **AISI 304 stainless steel**
finish: **satin**

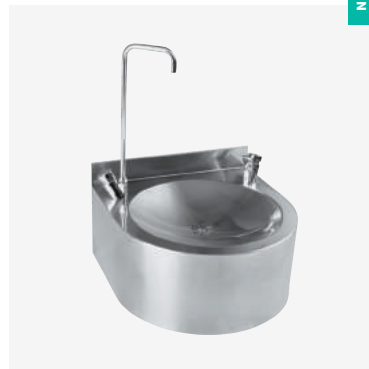

FAM120CS
wall fountain

material: **AISI 304 stainless steel**
finish: **satin**

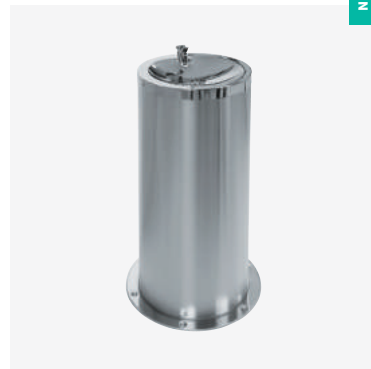

FAM100CS
floor fountain

material: **AISI 304 stainless steel**
finish: **satin**



FAM1101CS · FAM120CS · FA0100CS COMPONENTS AND MATERIALS

FAM110CS · FAM120CS · FA0100CS

- Chromed brass push button bubbler
- Connection to water mains and drain

FAM110CS · FAM120CS

- Rear attachment to wall
- Bright finish, to order

FAM120CS

- Chromed brass push lever glass filter

FA0100CS

- High dent resistance
- Clamping flange to fix the fountain to the floor
- Different heights, to order
- Soundproofing inner foam

FAM1101CS · FAM120CS · FA0100CS TECHNICAL SPECIFICATIONS

FAM110CS

| | |
|--------------|---------|
| Water inlet | 3 / 8" |
| Water outlet | Ø 40 mm |


FA0100CS

| | |
|--------|---------|
| Weight | 15.5 Kg |
|--------|---------|


FAM120CS · FAM110CS

| | |
|--------|--------|
| Weight | 2.9 Kg |
|--------|--------|


FAM110CS



FAM120CS

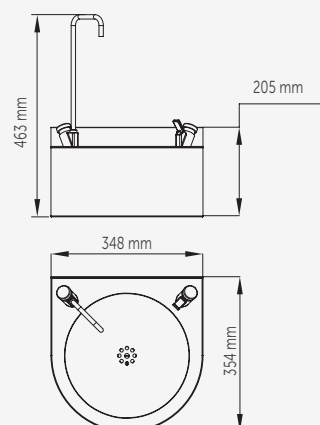

FA0100CS

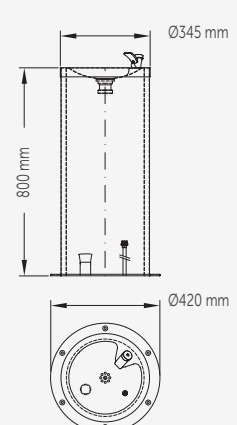

13

SIGNAGES

*to get one's bearings has
never been easier*







SINGNAGES

Finding your way was never so easy.

- Mediclinics offers a wide range of signs produced in satin stainless steel for placing in public places for guidance.
- Easily understood pictograms with an up to date design that are easily integrated into any location that requires them.
- Easy to install, our sign plates are supplied with strong adhesive, ready to be applied on any smooth surface

SIGNAGES

visual communication



PS0001CS
unisex toilet

material: **stainless steel**
finish: **satin**



PS0002CS
women's toilet

material: **stainless steel**
finish: **satin**



PS0003CS
men's toilet

material: **stainless steel**
finish: **satin**



PS0004CS
adapted toilet

material: **stainless steel**
finish: **satin**



PS0005CS
nappy changing

material: **stainless steel**
finish: **satin**



PS0006CS
breast-feeding

material: **stainless steel**
finish: **satin**



PS0007CS
showers

material: **stainless steel**
finish: **satin**



PS0008CS
silence

material: **stainless steel**
finish: **satin**



PS0009CS
no smoking

material: **stainless steel**
finish: **satin**




PS0010CS
mobile use prohibited

material: **stainless steel**
finish: **satin**



TECHNICAL SPECIFICATIONS

| | |
|------------|----------|
| Dimensions | Ø 116 mm |
| Thickness | 0.5 mm |



ANNEXES

*all the information you
need at hand*



Convention Center Palace, Dublin, Ireland



ANNEXES


Mediclinics BIM project



According to our policy on Innovation, Total Quality and Customer Focus, in September 2015 Mediclinics launched more than 150 products out of its general catalogue, which features more than 750 products, in the BIMObject® cloud.


Mediclinics was the first manufacturing company of hand dryers and washroom accessories for collectivities that published this huge amount of BIM objects at once.

All of these BIM objects are, currently, available to be downloaded in the latest versions of the Revit, ArchiCAD and SketchUp platforms in www.bimobject.com.

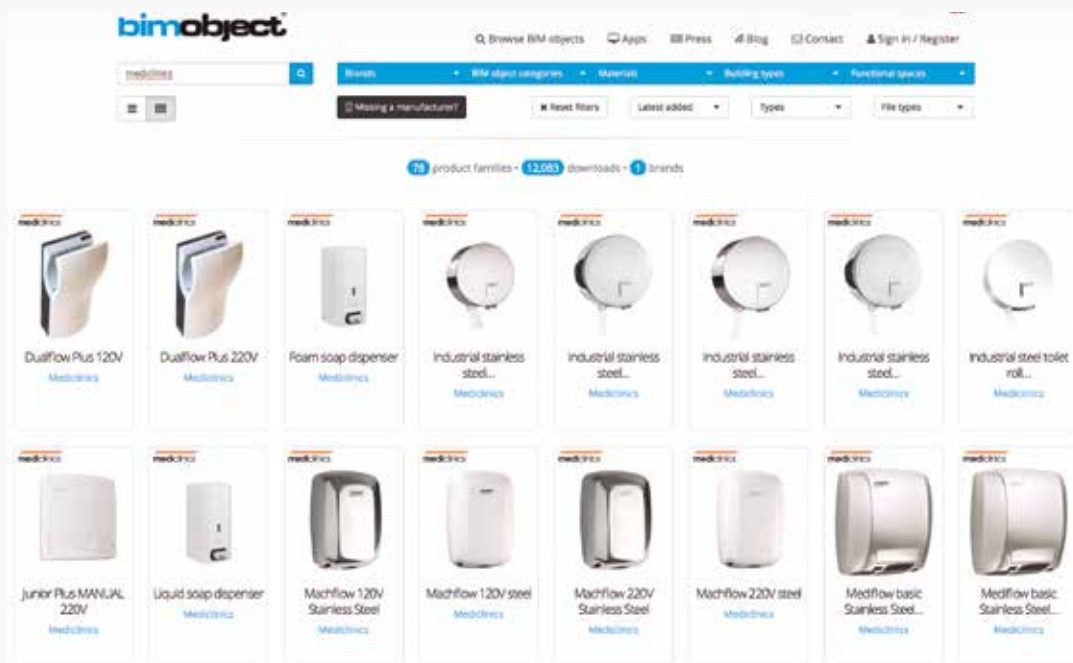

BIM stands for Building Information Modeling, or Building Information Model. It describes the process of designing a building collaboratively using one coherent system of computer models rather than as separate sets of drawings.


Nowadays there is a significant trend to replace the traditional CAD symbols by BIM objects. BIM objects still carry the representation of the product in 2D and 3D like a CAD file would, but they also carry much more.

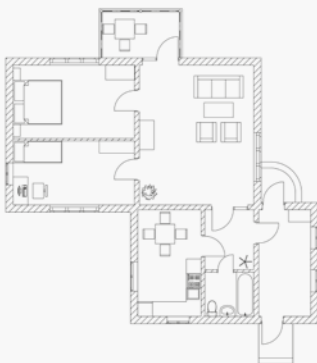

2D Project



3D Project

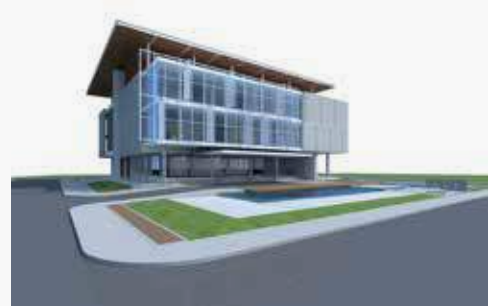


BIM Project

ANNEXES

Mediclinics BIM project

When it comes to a hand dryer, a BIM object may contain:

- Geometry and dimensions information (2D/ 3D drawings)
- Technical characteristics (voltage, frequency, power, air speed, etc.)
- MEP (Mechanical, Electrical and Plumbing) connections
- Installation manuals
- Maintenance videos
- Product sketches
- Business information
- Product certifications

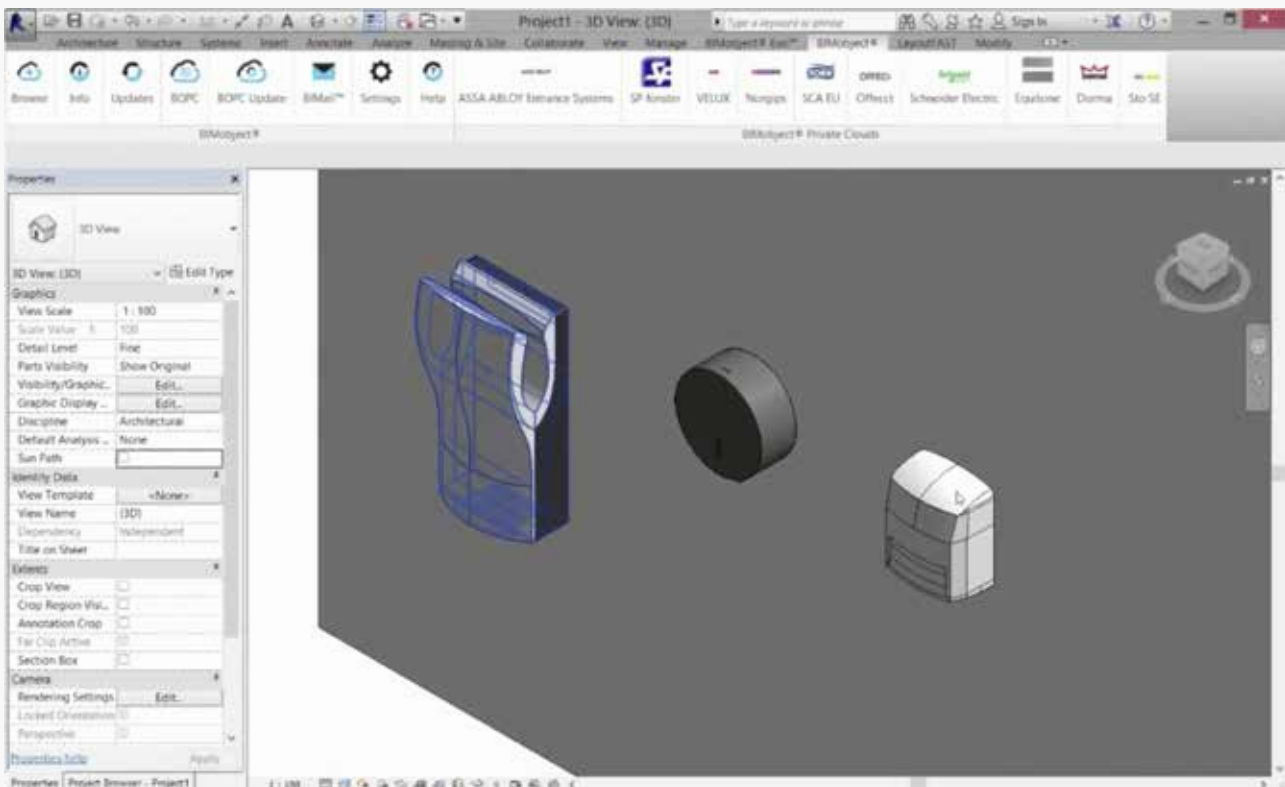

BIM is important to our industry because:

- Improves Productivity and Reduces Cost
- Decreases Reworks
- Provides Related Documents
- Gives Complete Project Snapshot
- Improves Coordination
- Enhances Customer Satisfaction

ANNEXES


summary of recessed range

| | | WHITE EOXY STEEL | BRIGHT STAINLESS STEEL | SATIN STAINLESS STEEL | BRIGHT CHROMED BRASS | PAGE |
|---|---|---------------------|------------------------------|-----------------------------|----------------------------|----------|
| HAND DRYERS | | | | | | |
|  | E05 + KT0005 E05C + KT0005C E05CS + KT0005CS | ● | ● | ● | | 49 |
|  | M03A + KT0010 M03AC + KT0010 M03ACS + KT0010 | ● | ● | ● | | 53 |
|  | M09A + KT009 M09ACS + KT009CS | ● | ● | | | 34 |
| SOAP DISPENSERS | | | | | | |
|  | DJT118 DJ0252AC | | ● | | ● | 87 80 |
|  | DJE0010CS | | | ● | | 87 |
| PAPER TOWEL DISPENSERS | | | | | | |
|  | DTE0020CS | | | ● | | 107 |
| BINS | | | | | | |
|  | PPE0010CS | | | ● | | 116 |
| MULTI-PURPOSE CABINETS | | | | | | |
|  | DTES0040CS | | | ● | | 125 |
|  | DTE0030CS | | | ● | | 126 |
| | DTE0050CS | | | ● | | 126 |
| BATHROOM ACCESSORIES | | | | | | |
|  | AIE0310C | | ● | | | 138 |
| | AIE0310CS | | | ● | | 138 |
|  | AIE0320C | | ● | | | 138 |
| | AIE0320CS | | | ● | | 138 |


ANNEXES

installation examples

Height for hand dryers

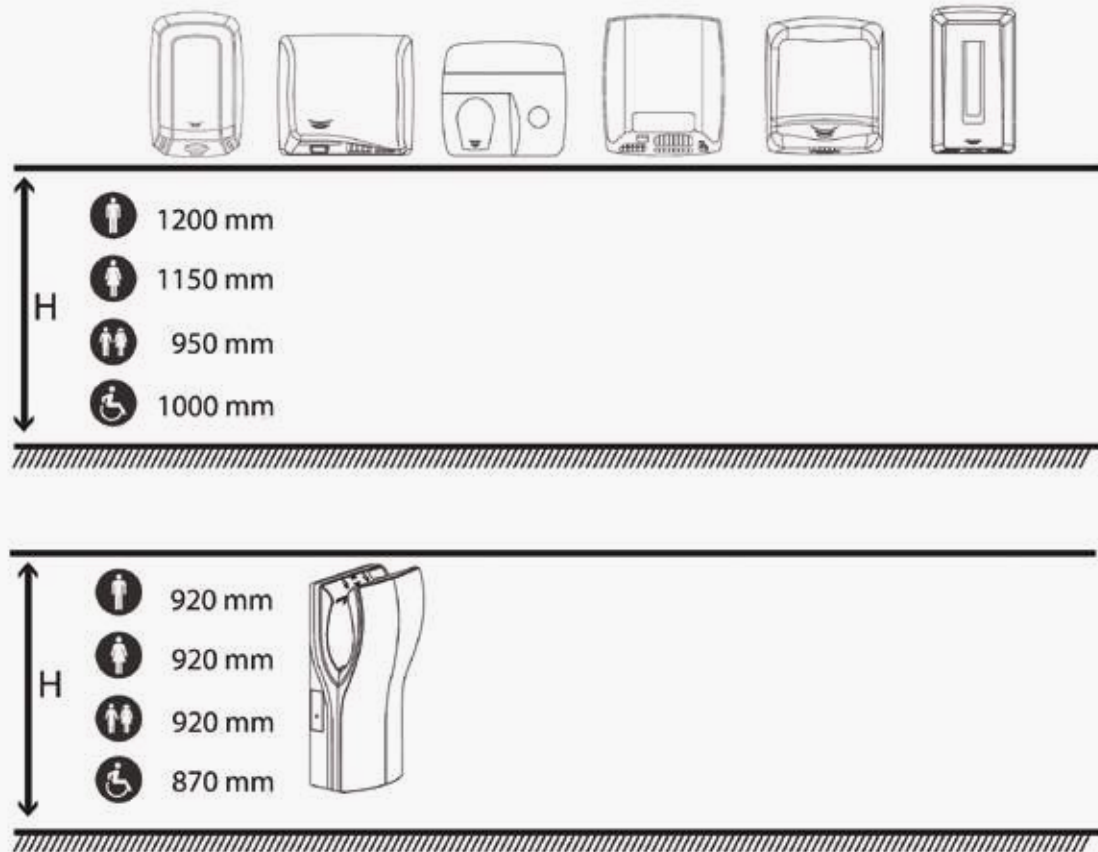


Height for hair dryers

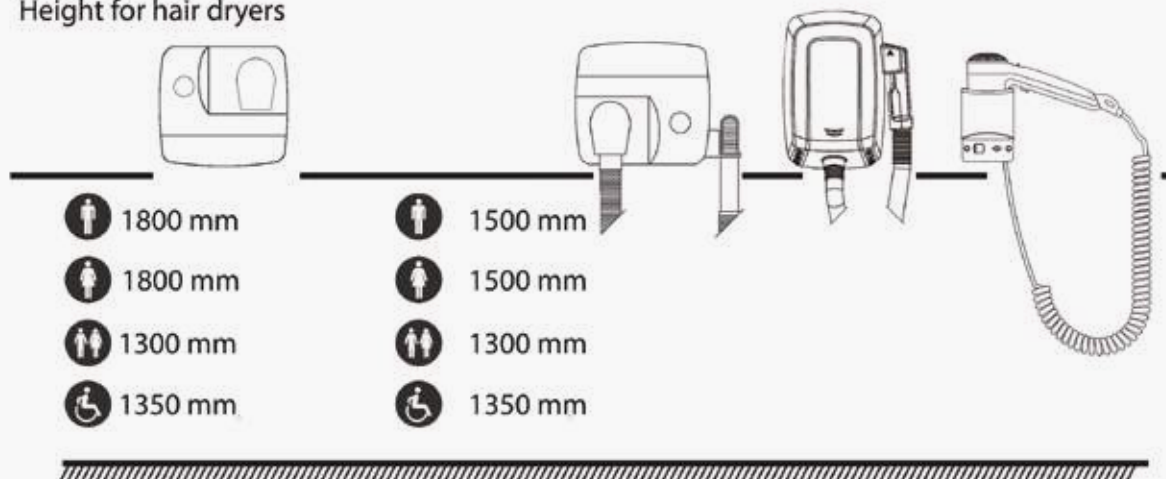


ANNEXES

installation examples

AIRPORT

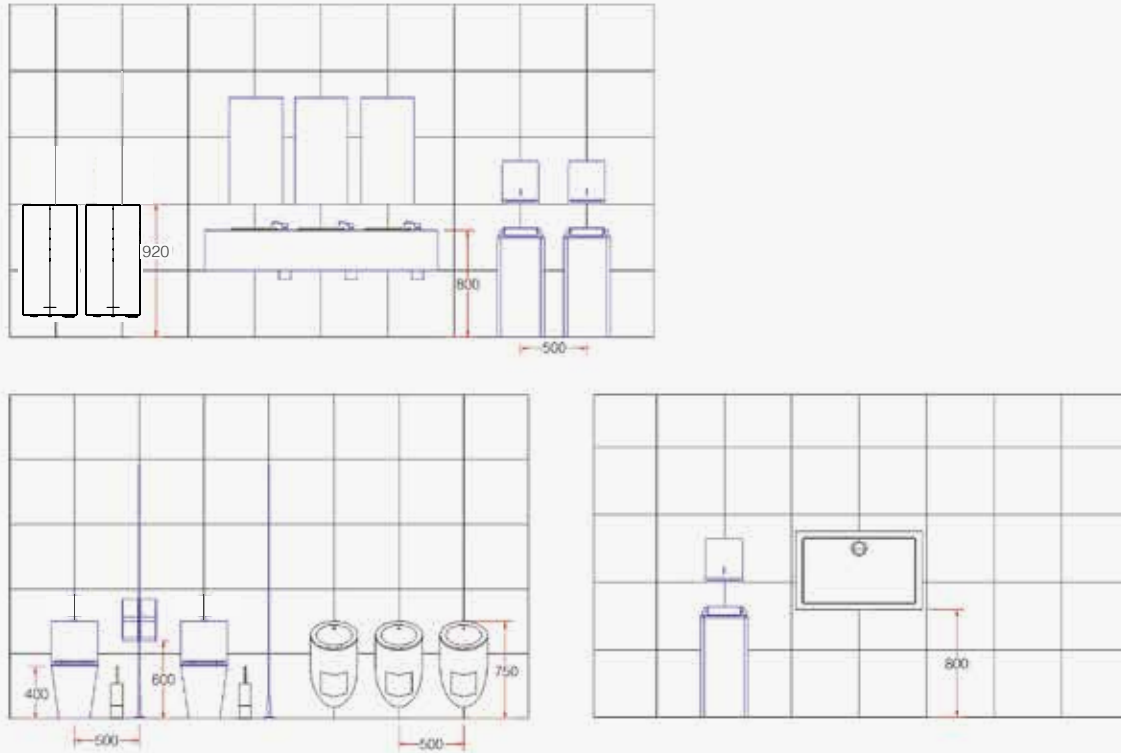

COFFEE SHOP



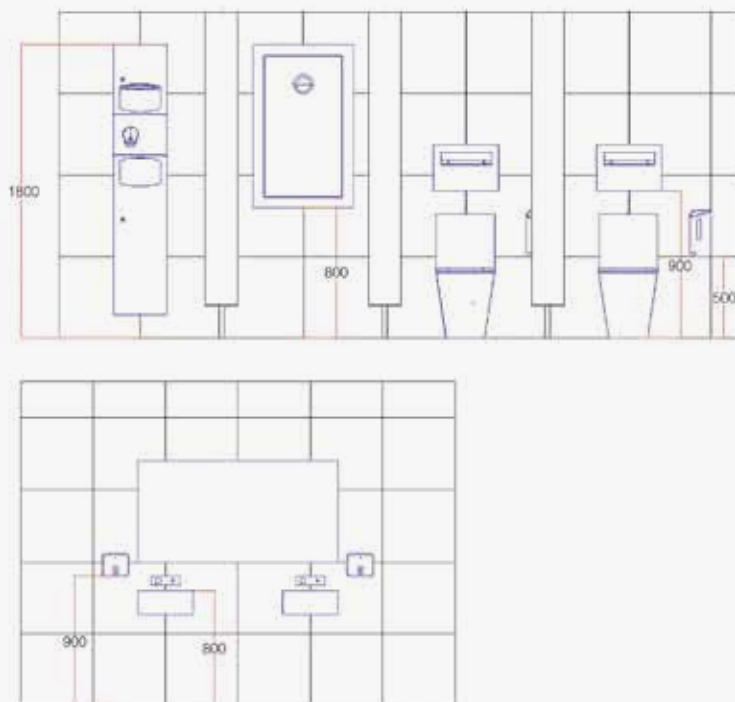


All measures are expressed in mm



ANNEXES

installation examples




GYM

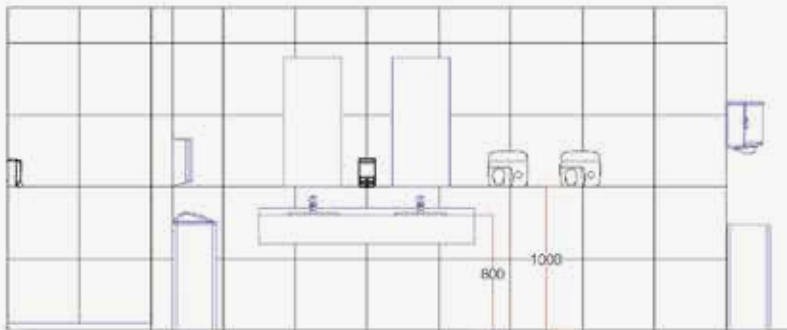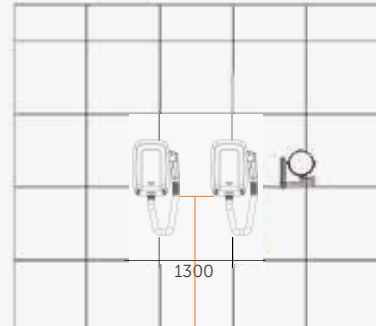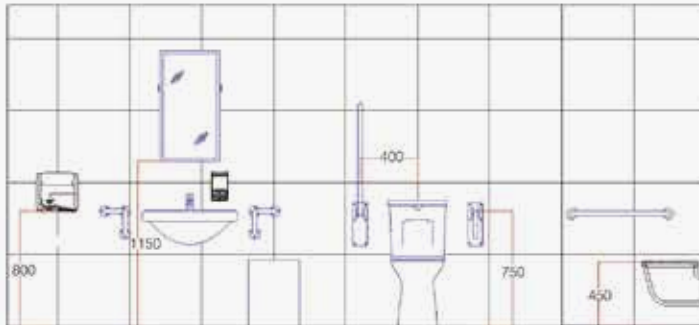

HOTEL

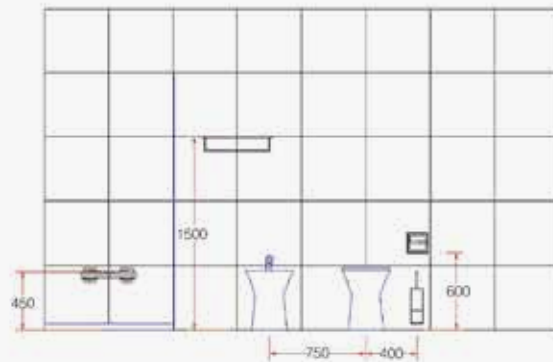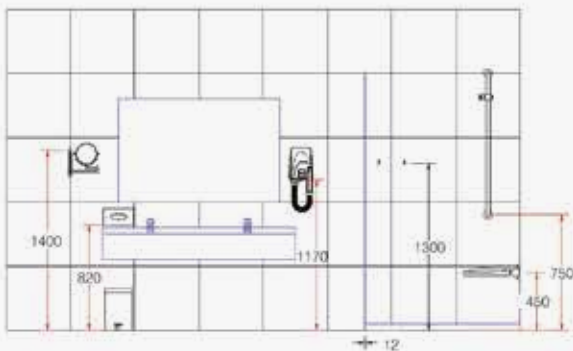

EDERLY HOME

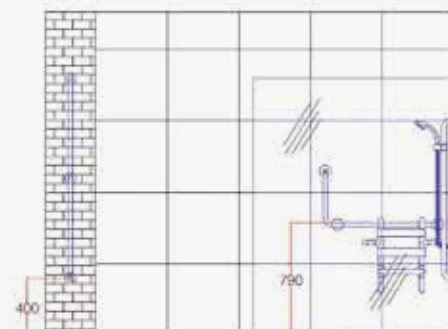



All measures are expressed in mm

ANNEXES

installation examples


ACCESSIBLE PUBLIC BATHROOM

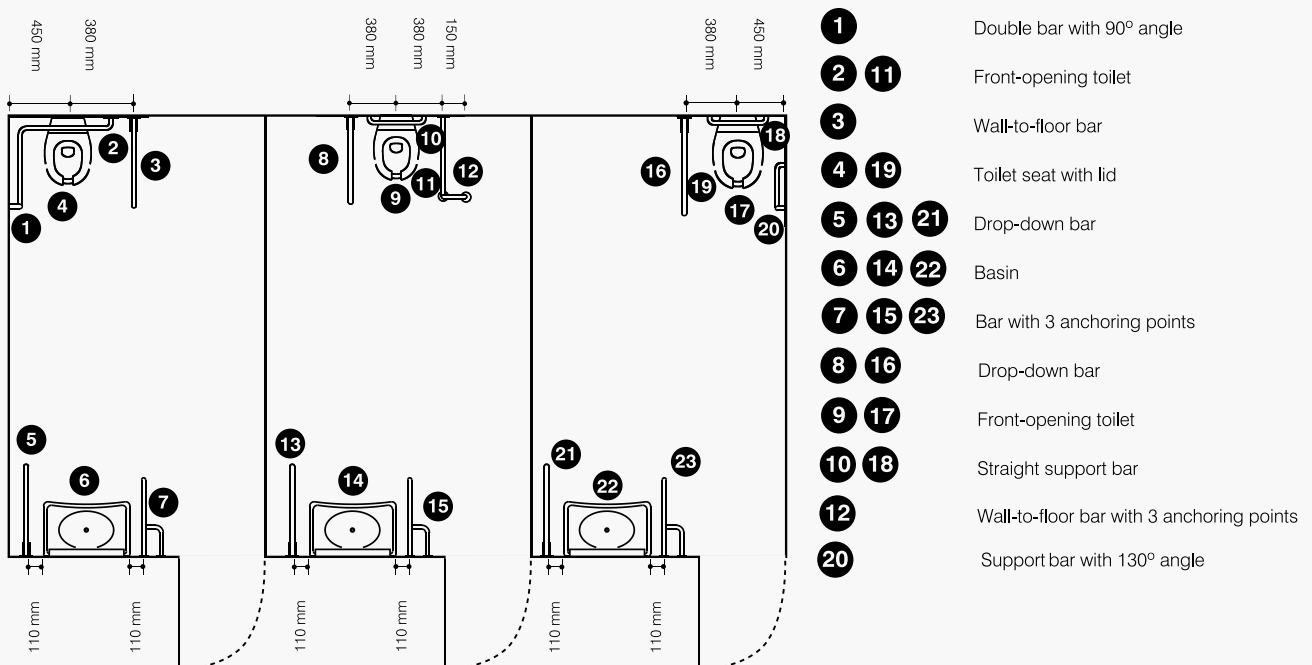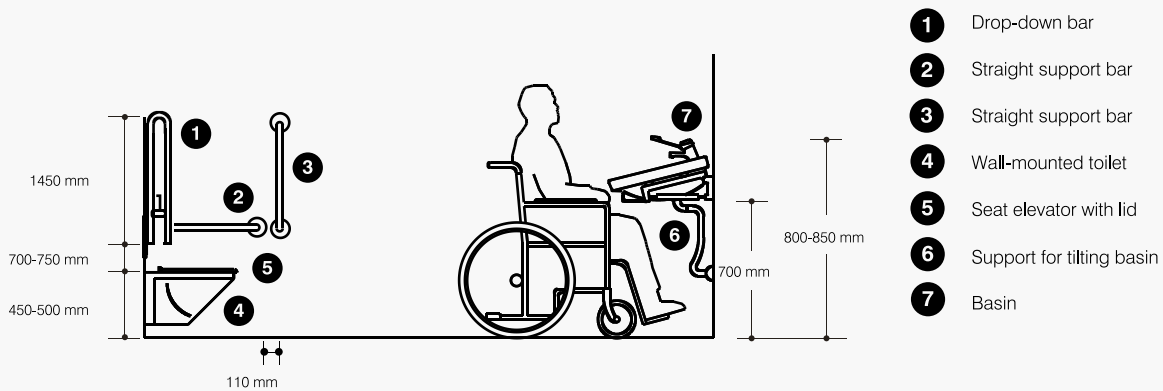

ANNEXES


installation examples

ACCESSIBLE DOMESTIC AND PUBLIC BATHROOM

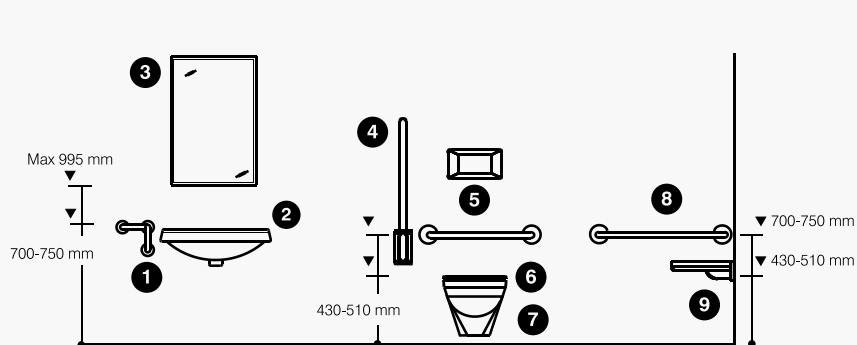

- 1 Bar with 3 anchoring points
- 2 Basin
- 3 Tilting mirror
- 4 Drop-down bar
- 5 Straight support bar
- 6 Toilet seat with lid
- 7 Front-opening toilet
- 8 Straight support bar
- 9 Drop-down shower seat

ACCESSIBLE DOMESTIC AND PUBLIC BATHROOM

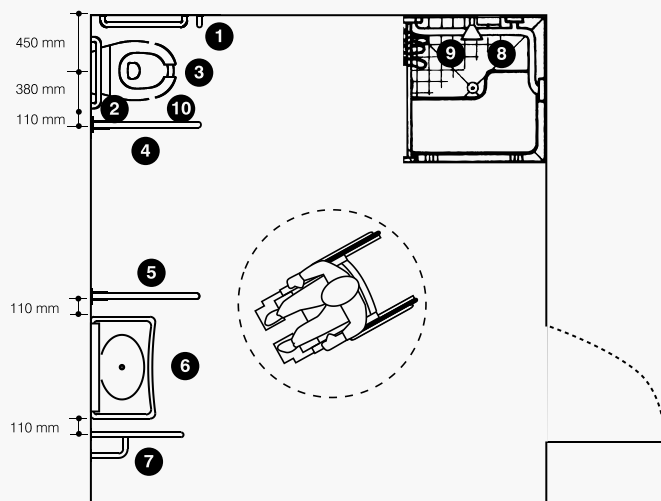

- 1 Straight support bar
- 2 Straight support bar
- 3 Wall-mounted toilet
- 4 Drop-down support bar
- 5 Drop-down bar
- 6 Basin
- 7 Support bar with 3 anchoring points
- 8 Drop-down seat
- 9 Horizontal bar between 2 walls
- 10 Seat elevator with lid

ANNEXES

advice on cleaning stainless steel

GENERAL INSTRUCTIONS

- Before applying any treatment, totally remove the plastic protection from the stainless steel.
- As a general rule, use only a gentle cloth dipped in soapy water.
- Always dry the treated surface using a gentle cloth.
- Applying certain cleaning treatments can change the tone of a piece's finish therefore it may be necessary to treat the entire piece.
- Do not use rough cloths, paper cloths or scouring pads.
- In the cleaning process never use bleach, products based on hypochlorite dissolutions, liquids made with strong acids, frequently used in the floor and wall cleaning, nor hydrochloric acid or products containing petrol.
- Pay special attention to the components of cleaning products, especially those specifically for cleaning bathrooms.
- In exceptional cases, polish very specific areas and with extreme care. Subsequently, apply a soft cloth dipped in soapy water and dry thoroughly.
- The printed markings come off easily when these cleaning processes are applied. Therefore, when possible, prevent application on top of the logos or other printed markings.

CLEANING SPECIFICATIONS

| | CLEANING PRODUCT | CLEANING METHOD |
|--|---|--|
| REGULAR CLEANING | <ul style="list-style-type: none"> •Gentle domestic liquid soap. •Water. | <ul style="list-style-type: none"> •Use a duster, a washing cloth or soft sponge, dipped in soapy water. •Dry the treated surface. •If the product is subjected to hostile environments, such as salt (near the sea), intense humidity, chlorine (swimming pools), hard water, etc. a further treatment in addition to regular cleaning is recommended involving the application of a household product containing silicon. |
| MEDIUM RESISTANCE STAINS (e.g.: fingerprints) | <ul style="list-style-type: none"> •Same as above. •Specific household products for stainless steel, such as "Tarni Shield Inox" manufactured by 3M. | <ul style="list-style-type: none"> •Proceed in the same way as with regular cleaning. If using specific household products, follow the manufacturer's instructions, ensuring that the product is in liquid or cream form. If using sprays, apply the product onto the cloth, not directly onto the surface to be treated. |
| HIGH RESISTANCE STAINS (e.g.: decolouration due to atmospheric agents) | <ul style="list-style-type: none"> •If the processes above do not provide satisfactory results, use, with care, household products for cleaning chrome, degreaser or dissolving products. Never products specifically designed for tin or copper, since they can affect the colour of the steel. The product "Tarni Shield Inox" recommended above can be useful in these cases. | <ul style="list-style-type: none"> •Proceed in the same way as with regular cleaning. If using specific household products, follow the manufacturer's instructions, ensuring that the products are in liquid or cream form. Before treating the entire affected surface, carry out a test on a small area. |
| MINERAL STAINS (e.g.: limescale or hard water) | <ul style="list-style-type: none"> •Dilute 5% of white vinegar in water. •Specific household products for treating limescale, with a silicon protector base (containing acetic or phosphoric acid). | <ul style="list-style-type: none"> •Proceed in the same way as with regular cleaning. If using specific household products, follow the manufacturer's instructions. Before treating the entire affected surface, carry out a test on a small area. |
| RUST STAINS CAUSED BY INADEQUATE CLEANING | <ul style="list-style-type: none"> •Any of those mentioned above, excluding those indicated for high resistance stains. You can use "Scotch Brite special non-scratch for vitro-ceramics by 3M". | <ul style="list-style-type: none"> •Polish gently and carefully using the 3M Scotch Brite in the direction of the grain or lines. *NOTE: This method only applies to satin finishes (rough polish), never to bright finishes (high polish). |

ANNEXES

Point of sale advertising

Mediclinics offers different displays that might be of your interest for your marketing efforts and promotions.

MK0267 Display

Display made of steel, to showcase the Dualflow Plus hand dryer, highlighting the benefits of the eco-friendly drying. It includes support for the informative pamphlets. Measurements: 1,200 x 495 x 360 mm




machine not included

MK0305 Display

Display made of steel, to simply and effectively display our products.

Measurements: 1,980 x 750 x 420 mm

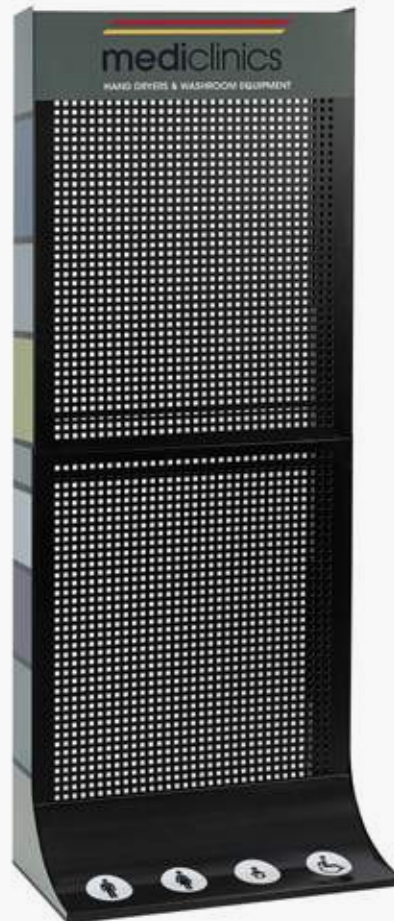

ANNEXES

certifications

GS / UL

- Guarantees that the stated technical specifications (voltage, power, consumption, etc.)
- Guarantees that the user can never get access to the live parts of the appliance.
- Guarantees that the equipment **will** never experience abnormal temperature increases.
- Guarantees that the user **will** never receive an electric shock from touching accessible metal parts.
- Guarantees that our hand dryers are protected against temporary power surges.
- Guarantees that our appliances are humidity-proof to IP22 or IP23, depending on the model.
- Guarantees the minimum fire risk for **all** our equipment.
- Guarantees that the covers of our hand dryers can withstand impact energy of 0.5 J.



EMC

- Guarantees that our appliances **will** not have any negative impact or cause collateral damage to other electrical or electronic devices close to them from the emission of continuous or discontinuous disturbances.
- Guarantees that our appliances operate optimally without being interfered with by other devices in the area, whether radiated or conducted through the electricity network.
- Guarantees that our appliances operate optimally without generating interference, whether radiated or conducted, that may affect the operation of other devices in the area.



BLUE ANGEL

Blue Angel is an environmental label organized by the federal government of Germany for the protection of people and the environment. It sets very exacting standards, is independent and has proven itself over more than 35 years as a guide for selecting environmentally-friendly products.

The main target is climate protection, a reduction in energy consumption and the avoidance of pollutants and waste are key objectives of environmental protection.

The Blue Angel eco-label for electric hand dryers may be awarded to products featuring the following environmental properties:


- low energy consumption
- achievement of a high degree of dryness
- durable, safe and recyclable design
- avoidance of environmentally damaging materials.



GREEN SPEC

The "Green Spec" concept arose from the need to develop standards covering energy efficiency and environmental responsibility. It focuses mainly on resources such as energy, water and materials. The main purpose of "Green Spec" is to obtain the maximum possible efficiency from these resources.

- It ensures equipment is energy-efficient and respects the environment
- It reduces the energy bill as well as minimising negative impacts on the environment.
- It helps with the design and construction of buildings and spaces that are healthier and more productive for the people who use them.
- It enhances the energy efficiency of any type of building.







































ISO 9001

- Guarantees the company is 100% customer-orientated.
- Strengthens customers' faith in the company, commensurate with the company's ability to consistently provide the agreed products and/or services.
- Facilitates the opening of new markets both nationally and internationally.
- Improves our competitive position in terms of increased revenue and market share.
- Increases productivity as a result of continuous improvements in our internal processes. Improves our internal organization thanks to more fluid communications, with set objectives and responsibilities.
- Orientation towards continuous improvement which allows us to identify new opportunities to improve the objectives we have already achieved.
- Greater response capacity and flexibility in addressing the changing opportunities in the market.
- Improves the capacity to create value, in terms of both the company itself and its suppliers and strategic partners.
- Improves the motivation of the organization's staff and their willingness to work as a team.



ANNEXES

certifications

| | | CERTIFICATE / QUALITY MARK | | | | | |
|------------------------|-----------------|---|---|---|--|---|---|
| | | GS | EMC | BLUE ANGEL | UL | GREEN SPEC | UL-NOM |
| HAND DRYERS | dualflow® plus |  |  |  |  |  |  |
| | machflow® |  |  |  |  |  |  |
| | speedflow® |  |  | |  |  | |
| | saniflow® |  |  |  |  | | |
| | mediflow® |  |  | |  | | |
| | optima®/ prima® |  |  | |  | | |
| | junior plus® |  |  | |  | | |
| | smartflow® |  |  | | | | |
| HAIR DRYERS | smartflow® |  |  | | | | |
| | machflow® |  |  | | | | |
| BABY CHANGING STATIONS | CP0016H |  | | | | | |

* UL-NOM (MEXICO) : Dualflow plus, Machflow

- Descriptive table of Mediclinics' certified products and the organizations that endorse them.



ADA. ACCESSIBILITY STANDARD FOR BUILDINGS AND INSTALLATIONS



UNE 41523. BUILDING ACCESSIBILITY STANDARD HYGIENIC AREAS HEALTH CENTRES

ANSI S117.1 ACCESSIBILITY AND USABILITY OF BUILDINGS AND FACILITIES

If installed correctly:

- Eliminates architectural barriers and facilitates access to any space for people with reduced mobility.
- Allows people with reduced mobility to manoeuvre close to and use the appliances in any space.
- Designs products suitable for the specific needs of people with reduced mobility.
- Achieves shapes and textures that perfectly meet the needs of people with reduced mobility.
- Provides people with reduced mobility with the elements that allow them to move safely within any space

ANNEXES

world wide job references

AIRPORTS:

- United Airlines VIP red carpet Clubs, across USA
- JFK International Airport New York, NY
- Bandaranaike International Airport, Colombo, Sri Lanka
- Chennai International airport, India
- Istanbul Airport, Turkey
- Charles de Gaulle international airport, Paris, France
- Monterrey international Airport, Mexico
- Barcelona - El Prat Airport, Spain
- Queen Alia International Airport, Amman, Jordania
- Sidney International Airport, Sidney, Australia

CASINOS:

- Lloret de Mar Casino, Girona, Spain
- Sydney Opera House and Casino, Australia
- The Crown Casino, Melbourne, Australia

CINEMA & THEATERS

- UGC Cinemas, Paris, France
- Cines Villegas, Buenos Aires, Argentina
- Broadway Cinema at Hollywood Plaza, Hong Kong
- Cineplex, Perú
- Royal Opera House, Muscat, Oman
- Sydney Opera House and Casino, Australia
- Royal Theatre, Madrid, Spain
- La Casona Theatre, Buenos Aires, Argentina
- Cinemark movie theaters, across USA
- Century movie theaters, across USA

HOSPITALS:

- Curious Mind Child Development Center, Washington D.C.
- South Lake Hospital, Clermont, FL
- Santa Creu i Sant Pau Hospital, Barcelona, Spain
- St. Teresa's Hospital, Kowloon, Hong Kong
- Queen Mary Hospital, Hong Kong
- Central University Hospital of Asturias, Spain
- Sembawang Nursing Home, Singapore
- Cliniche moderne San Marco, Latina, Italy
- Ghayati Hospital, Abu Dhabi, UAE

HOTELS:

- Gran Hyatt Hotel Chicago, Chicago, IL
- Gran Hyatt Hotel, San Francisco, CA
- Crown Regency Hotel, Manila, The Philippines
- Hotel Best western Sumadja, Belgrade, Serbia
- Hotel Ritz Carlton, Bahrain
- Hotel Intercontinental, Johannesburg, South Africa
- Hotel Sheraton, Montevideo, Uruguay
- Hotel Epic Sana, Lisboa, Portugal
- Melià, Hotusa & AC Hotels, across Europe
- Gran Hyatt at Chicago & San Francisco, USA

MUSEUMS:

- Brooklyn Children's Museum, Brooklyn, NY
- Alexander Museum, Tel Aviv, Israel
- The National Maritime Museum, Sydney, Australia
- Guggenheim Museum, Bilbao, Spain
- Museo del Prado, Madrid, Spain
- National Museum, Warsaw, Poland

STADIUMS:

- Dodger Stadium, Los Angeles, CA
- Ibn Battouta Olympic Stadium, Tanger, Morocco
- Football Stadium Camp Nou, Barcelona, Spain
- Football Stadium Santiago Bernabeu, Madrid, Spain
- London 2012 Olympics Stadium, UK
- Old Trafford Stadium, Manchester, UK
- Sydney Olympics Venues, Australia

RACECOURSES & CIRCUITS:

- F1 racetracks of Abu Dhabi & Bahrain
- Meydan racecourse, Dubai, UAE

ANNEXES

world wide job references

RAILWAY STATIONS:

- Ferryboat central station "Buque-Bus", Buenos Aires, Argentina
- Hong Kong MTR Stations, Hong Kong

RECREATIONAL & THEME PARKS:

- Sentosa Island Theme Park, Singapur
- Port Aventura, Tarragona, Spain
- Delaware State Fairgrounds, Delaware, USA

RESTAURANTS:

- Burger King, across Europe
- McDonalds, across Europe
- Dunkin' Donuts, Chicago, IL
- Arby's restaurant, New Albany, IN
- Subways franchise restaurants, FL
- Dominos Pizza, New York, NY
- Kokoriko franchises, Colombia
- Tramvai, Milan, Italy

SCHOOLS:

- San Jose City College, San Jose, CA
- Dan D. Rogers elementary school, Dallas, TX
- York College of Pennsylvania, PA
- Troy Shorewood Elementary School, Shorewood, IL
- Ecole Polymechanique, Laval, Quebec, Canada
- Academie Ste. Therese, Rosemere, Quebec, Canada
- Harrow International School, Singapore
- The Hills Sports High School, Australia

SHOPPING CENTERS:

- Polo Park shopping Center, Winnepeg, Manitoba, Canada
- Bangsar shopping vaillage, Kuala Lumpur, Malaysia
- Top Ride city shopping mall at Central North, Ryde, Australia
- Manly wharf, Sidney, Australia
- Sopping center Miraflores, Guatemala city, Guatemala
- Tel Aviv Towers at Azrieli Mall, Israel
- An Phu Plaza, Ho Chi Minh, Vietnam

SPORT CENTERS & GYMS:

- Canottieri Milano, Italy
- Metropolitan, across Spain
- Health Works Fitness, Queensland, Australia
- DIR Fitness Centers, Barcelona, Spain
- Reebok Sports Club, Madrid, Spain

STORES:

- Wal Mart Stores & Superstores, nationwide
- Umbria Gomme, Milano, Italy
- Ikea Stores, across Europe

UNIVERSITIES:

- Pennsylvania State University - Residential Housing, PA
- University of California - Berkeley, Vance Brown Bldg., CA
- National University of Singapore, Singapore
- Hong Kong University, Centennial Campus, Hong Kong
- Lebanon University Campus, Beirut, Lebanon
- Queen Mary, University of London, UK
- Universidad Autónoma Metropolitana, Mexico City, Mexico
- ESADE, Barcelona, Spain

OTHERS:

- Ohio State Penitentiary, Youngstown, OH
- Texas Department of Transportation, TX
- New York Stock Exchange Building, New York, NY
- Brazos Town Hall, Rosenberg, TX
- Nassau Tennis Club, Skillman, NY
- Glendale Heights Police Station, Glendale Heights, IL



PRODUCT LIST

*list A-Z to make your
search easier*



Cologne Oval Offices, Cologne, Germany

PRODUCT LIST

| CODE | PAG. |
|----------|------|
| AC0083C | 147 |
| AC0780C | 144 |
| AC0950C | 142 |
| AC0956C | 143 |
| AC0957C | 143 |
| AC0959C | 142 |
| AC0961C | 142 |
| AC0962C | 144 |
| AC0963C | 144 |
| AC0964C | 144 |
| AC0966C | 146 |
| AC0967C | 145 |
| AC0970C | 145 |
| AC0973C | 142 |
| AC0974C | 142 |
| AC0976C | 147 |
| AC0978C | 143 |
| AC0979C | 143 |
| AI0010C | 135 |
| AI0010CS | 135 |
| AI0020C | 131 |
| AI0020CS | 131 |
| AI0030C | 131 |
| AI0030CS | 131 |
| AI0033C | 140 |
| AI0033CS | 140 |
| AI0036C | 140 |
| AI0036CS | 140 |
| AI0040C | 131 |
| AI0040CS | 131 |
| AI0050C | 133 |
| AI0050CS | 133 |
| AI0060C | 132 |
| AI0060CS | 132 |
| AI0070C | 134 |
| AI0070CS | 134 |
| AI0080C | 134 |
| AI0080CS | 134 |
| AI0090C | 132 |
| AI0090CS | 132 |
| AI0100C | 134 |
| AI0100CS | 134 |
| AI0110C | 132 |
| AI0110CS | 132 |
| AI0113C | 139 |

| CODE | PAG. |
|----------|--------|
| AI0113CS | 139 |
| AI0115C | 136 |
| AI0115CS | 136 |
| AI0118C | 137 |
| AI0118CS | 137 |
| AI0129C | 139 |
| AI0129CS | 139 |
| AI0140C | 133 |
| AI0140CS | 133 |
| AI0160C | 133 |
| AI0160CS | 133 |
| AI0170C | 141 |
| AI0184C | 136 |
| AI0184CS | 136 |
| AI0310C | 138 |
| AI0310CS | 138 |
| AI0320C | 138 |
| AI0320CS | 138 |
| AI0710C | 136 |
| AI0710CS | 136 |
| AI0720C | 137 |
| AI0720CS | 137 |
| AI0910C | 141 |
| AI0920C | 99/135 |
| AI0920CS | 99/135 |
| AI0968C | 139 |
| AI0968CS | 139 |
| AI0985C | 137 |
| AI0985CS | 137 |
| AIE310C | 138 |
| AIE310CS | 138 |
| AIE320C | 138 |
| AIE320CS | 138 |
| AM0100 | 160 |
| AM0201C | 160 |
| AM0201CS | 160 |
| AM0251C | 161 |
| AM0251CS | 161 |
| AM0500 | 161 |
| BA0130 | 158 |
| BA0130CS | 155 |
| BAD090 | 156 |
| BAD090CS | 151 |
| BAI090 | 156 |
| BAI090CS | 151 |

| CODE | PAG. |
|-----------|------|
| BD0700 | 158 |
| BD0700CS | 155 |
| BFD600 | 158 |
| BFD600CS | 154 |
| BFI600 | 158 |
| BFI600CS | 154 |
| BG0089CS | 153 |
| BG0800 | 157 |
| BG0800CS | 152 |
| BG0850 | 157 |
| BG0850CS | 152 |
| BG0900CS | 152 |
| BGA0820 | 157 |
| BGA0820CS | 153 |
| BGC710 | 157 |
| BGC710CS | 152 |
| BR0300 | 156 |
| BR0300CS | 151 |
| BR0400 | 156 |
| BR0400CS | 151 |
| BR0600 | 156 |
| BR0600CS | 151 |
| BR0750 | 156 |
| BR0750CS | 151 |
| BR0900 | 156 |
| BR0900CS | 151 |
| BR1200CS | 151 |
| BS0010 | 157 |
| BS0010CS | 154 |
| BSD020CS | 153 |
| BSI020CS | 153 |
| BSD090CS | 155 |
| BTI090CS | 155 |
| CP0016H | 166 |
| CP0016HCS | 166 |
| CP0016V | 167 |
| CP0016VCS | 167 |
| DBH100 | 99 |
| DBH100C | 99 |
| DBH100CS | 99 |
| DCA100CS | 98 |
| DJ0010F | 85 |
| DJ0020F | 85 |
| DJ0031 | 81 |
| DJ0037A | 79 |

| CODE | PAG. |
|------------|------|
| DJ0037AB | 79 |
| DJ0037AC | 79 |
| DJ0037ACS | 79 |
| DJ0031B | 81 |
| DJ0031C | 81 |
| DJ0031CS | 81 |
| DJ0040 | 82 |
| DJ0040B | 82 |
| DJ0040C | 82 |
| DJ0040CS | 82 |
| DJ0111C | 83 |
| DJ0111CS | 83 |
| DJ0112C | 83 |
| DJ0112CS | 83 |
| DJ0115C | 84 |
| DJ0115CS | 84 |
| DJ0160AC | 80 |
| DJ0252AC | 80 |
| DJE0010CS | 87 |
| DJF0032 | 81 |
| DJF0038A | 79 |
| DJF0038AB | 79 |
| DJF0032B | 81 |
| DJF0038AC | 79 |
| DJF0038ACS | 79 |
| DJF0032C | 81 |
| DJF0032CS | 81 |
| DJFP035 | 86 |
| DJFP035B | 86 |
| DJFP035C | 86 |
| DJFP035CS | 86 |
| DJP0034 | 86 |
| DJP0034C | 86 |
| DJP0034CS | 86 |
| DJS0033 | 81 |
| DJS0033B | 81 |
| DJS0033C | 81 |
| DJS0033CS | 81 |
| DJSP036 | 86 |
| DJSP036B | 86 |
| DJSP036C | 86 |
| DJSP036CS | 86 |
| DJT118 | 87 |
| DT0208ACS | 107 |

| CODE | PAG. |
|------------|------|
| DT0303 | 106 |
| DT0303C | 106 |
| DT0303CS | 106 |
| DT2106 | 105 |
| DT2106B | 105 |
| DT2106C | 105 |
| DT2106CS | 105 |
| DTE0020CS | 107 |
| DTE0030CS | 126 |
| DTE0050CS | 126 |
| DTES0040CS | 125 |
| DTH100 | 98 |
| DTH100C | 98 |
| DTH100CS | 98 |
| DTP025CS | 107 |
| E05 | 43 |
| E05A | 48 |
| E05B | 43 |
| E05AB | 48 |
| E05AC | 48 |
| E05ACS | 48 |
| E05C | 43 |
| E05CS | 43 |
| E85 | 44 |
| E85A | 44 |
| E88 | 45 |
| E88A | 47 |
| E88AB | 47 |
| E88AC | 47 |
| E88ACS | 47 |
| E88AO | 46 |
| E88B | 45 |
| E88C | 45 |
| E88CS | 45 |
| E88O | 46 |
| EP0300 | 163 |
| EP0300CS | 163 |
| EP0350CS | 162 |
| EP0400CS | 163 |
| EP0450CS | 162 |
| ES0010C | 146 |
| ES0965C | 135 |
| ES0965CS | 135 |
| ES0968C | 140 |
| ES0968CS | 140 |

PRODUCT LIST

| CODE | PAG. |
|----------|------|
| FA0100CS | 183 |
| FAM110CS | 183 |
| FAM120CS | 183 |
| KIT 2789 | 94 |
| KT0005 | 49 |
| KT0005C | 49 |
| KT0005CS | 49 |
| KT009 | 34 |
| KT009CS | 34 |
| KT0010 | 53 |
| KT0010C | 53 |
| KT0010CS | 53 |
| KT0030CS | 126 |
| KT0040CS | 125 |
| KTP009 | 35 |
| KTR100 | 171 |
| M02A | 51 |
| M02AB | 51 |
| M02AC | 51 |
| M02ACS | 51 |
| M03A | 52 |
| M03AB | 52 |
| M03AC | 52 |
| M03ACS | 52 |
| M04A | 61 |
| M04AC | 61 |
| M04ACS | 61 |
| M06A | 38 |
| M06AB | 38 |
| M06AC | 39 |
| M06ACS | 39 |
| M09A | 32 |
| M09AB | 32 |
| M09AC | 33 |
| M09ACS | 33 |
| M14A | 29 |
| M14AB | 29 |
| M14ACS | 29 |
| M88APLUS | 59 |
| M88PLUS | 59 |
| M99A | 57 |
| M99AC | 57 |
| M99ACS | 57 |
| PP0006 | 116 |
| PP0006C | 116 |

| CODE | PAG. |
|-----------|------|
| PP0006CS | 116 |
| PP0065 | 113 |
| PP0065C | 113 |
| PP0065CS | 113 |
| PP0080 | 113 |
| PP0080C | 113 |
| PP0080CS | 113 |
| PP0104CS | 141 |
| PP0162C | 141 |
| PP0162CS | 141 |
| PP1065 | 114 |
| PP1065C | 114 |
| PP1065CS | 114 |
| PP1080 | 114 |
| PP1080C | 114 |
| PP1080CS | 114 |
| PP1303 | 117 |
| PP1303C | 117 |
| PP1303CS | 117 |
| PP1305 | 117 |
| PP1305C | 117 |
| PP1305CS | 117 |
| PP1312 | 117 |
| PP1312C | 117 |
| PP1312CS | 117 |
| PP1321 | 117 |
| PP1321C | 117 |
| PP1321CS | 117 |
| PPA2279 | 115 |
| PPA2279B | 115 |
| PPA2279C | 115 |
| PPA2279CS | 115 |
| PPE0010CS | 116 |
| PR0700CS | 96 |
| PR0781 | 96 |
| PR0781C | 96 |
| PR0781CS | 96 |
| PR0789 | 95 |
| PR0789C | 95 |
| PR0789CS | 95 |
| PR2783 | 93 |
| PR2783B | 93 |
| PR2783C | 93 |
| PR2783CS | 93 |
| PR2784 | 97 |

| CODE | PAG. |
|------------|------|
| PR2784B | 97 |
| PR2784C | 97 |
| PR2784CS | 97 |
| PR2787 | 94 |
| PR2787B | 94 |
| PR2787C | 94 |
| PR2787CS | 94 |
| PS0001CS | 187 |
| PS0002CS | 187 |
| PS0003CS | 187 |
| PS0004CS | 187 |
| PS0005CS | 187 |
| PS0006CS | 187 |
| PS0007CS | 187 |
| PS0008CS | 187 |
| PS0009CS | 187 |
| PS0010CS | 187 |
| SC0004 | 71 |
| SC0009 | 70 |
| SC0009CS | 70 |
| SC0010 | 72 |
| SC0010CS | 72 |
| SC0020 | 72 |
| SC0020CS | 72 |
| SC0030 | 73 |
| SC0030CS | 73 |
| SC0040 | 73 |
| SC0087 | 71 |
| SC0088 | 71 |
| SC0088H | 69 |
| SC0088HCS | 69 |
| SC1088HT | 69 |
| SC1088HTCS | 69 |
| SN0027C | 171 |
| SN0027CS | 171 |
| SN0031C | 171 |
| SN0031CS | 171 |
| SN0036C | 171 |
| SN0036CS | 171 |
| SN0105C | 177 |
| SN0105CS | 177 |
| SN0108C | 177 |
| SN0108CS | 177 |
| SN0110C | 177 |
| SN0110CS | 177 |

| CODE | PAG. |
|-----------|------|
| SN0200CS | 172 |
| SN0300CS | 172 |
| SN0700CS | 175 |
| SN0800CS | 175 |
| SNLM35C | 174 |
| SNLM35CS | 174 |
| SNLM36CS | 173 |
| SNLM38CS | 173 |
| SNLM42CS | 173 |
| SNLM44CS | 172 |
| SNPT01C | 178 |
| SNPT01CS | 178 |
| SNR027C | 171 |
| SNR027CS | 171 |
| SNR031C | 171 |
| SNR031CS | 171 |
| SNR036C | 171 |
| SNR036CS | 171 |
| SNU104C | 176 |
| SNU104CS | 176 |
| SNU106C | 176 |
| SNU106CS | 176 |
| SNU108C | 176 |
| SNU108CS | 176 |
| TP0130 | 178 |
| TP0135 | 178 |
| UCEN0200A | 123 |
| UCEP0185A | 124 |
| UCEP0130A | 124 |

**NEW
PRODUCT**

**LOW TRAFFIC**

This model is suitable for installation in areas with low traffic.

**MEDIUM TRAFFIC**

This model is suitable for installation in areas with medium traffic.

**HIGH TRAFFIC**

This model is suitable for installation in areas with high traffic.

**ELECTRICAL PROTECTION**

This model incorporates elements that ensure electrical insulation.

**LOW ELECTRICITY CONSUMPTION**

Eco-efficient hand dryer with low electricity consumption/high energy savings.
Hairdryer with low electricity consumption/high energy savings.

**VALUE FOR MONEY**

This model offers excellent value for money.

**VANDAL-PROOF**

This model incorporates elements or features that make it difficult or impossible to damage or remove.

**LOCK WITH KEY****NUTS AND BOLTS INCLUDED**

This model includes the nuts and bolts necessary for it to be installed on masonry walls.

**FLANGE COVER FOR CONCEALED MOUNTING**

Grab bars and accessories with a hidden mounting system, the assembly plate being concealed by the flange cover.

**BIOCOTE**

Anti-microbe treatment for Dualflow Plus hand dryers

**ADA STANDARD**

Model which, when installed correctly, complies with the Accessibility Guidelines for Buildings and Facilities ADAAG (USA).

**UNE STANDARD**

Model which, when installed correctly, complies with the Standard for Accessibility in Buildings. Hygienic and health spaces UNE 41523.

**UNITS PER BOX**

Unit quantities per box.

**UNITS PER PALLET**

Unit quantities per pallet.
The type of pallet is in between brackets, which has its meaning in page 155.

