


URINAL FLUSH VALVE

PRTR0013 | 2000108749

ARTICLE GROUP (AG) : PRTR0013 ++ | ARTICLE FAMILY (AF) : **Electronic urinal flushing systems** | PRODUCT GROUP (PG) : **Flushing systems**

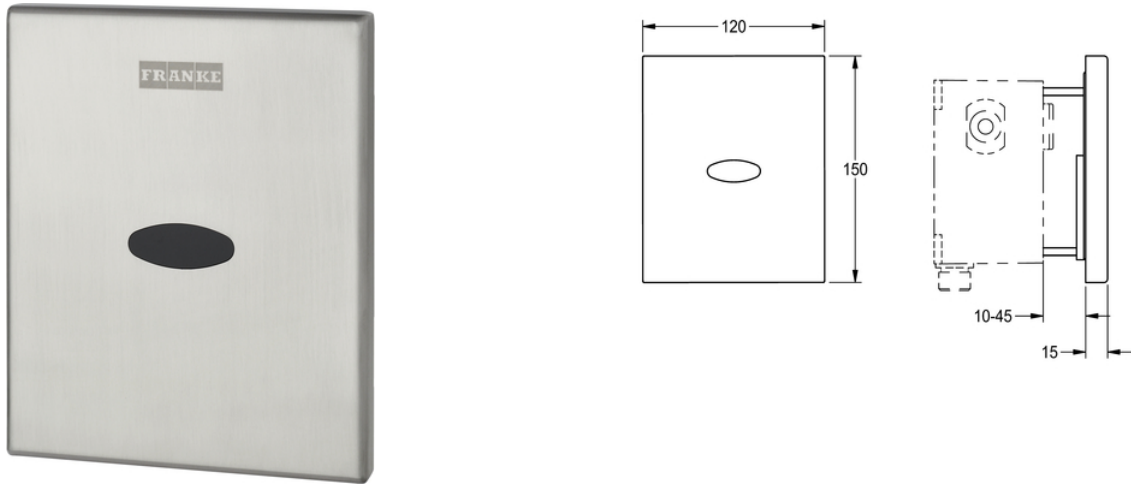

Finished installation kit for FLUSH-S non-touch, opto-electronically controlled urinal flush valve DN 15 for installation in walls. With self-closing solenoid valve cartridge, control electronics with sensor and stainless steel cover plate 120 x 150 mm.

with battery operation (6 V DC)

TECHNICAL DATA

Calculation Flow Rate Cold Water	0.30 liter per seconds
Default Automatic Hygiene Flushing	12H-AFTER-ACTIVITY
Functional Principle	ELECTRONIX-C
Gross Weight	0.52 kg
Diameter Nominal	DN-15-1-2INH
Material Casing	STAINLESS-STEEL
Maximum Flow Pressure	8.00 bar
Minimum Flow Pressure	0.50 bar
Net Weight	0.49 kg
Power Supply Connection	BATTERY-6-V
Protective System Ip	40
Surface Finish Casing	SATIN-FINISHED
Type Of Flushing Fitting	URINAL
Type Of Mounting	IN-WALL-INSTALLATION-W-BOX
Type Of Operation	SENSOR-OPERATION
Type Of Sensor	OPTO-ELEC-SENSOR



URINAL FLUSH VALVE

PRTR0013 | 2000108749

ARTICLE GROUP (AG) : PRTR0013 ++ | ARTICLE FAMILY (AF) : Electronic urinal flushing systems | PRODUCT GROUP (PG) : Flushing systems

MANDATORY ACCESSORY



URINAL FLUSH VALVE

2000107414



INSTALLATION ELEMENT

2000110549



INSTALLATION ELEMENT

2030020123


ACCESSORIES



REMOTE CONTROL

2000108510

SPARE PARTS



BATTERY COMPARTMENT

2000109466