


BASIN TAP

PR3O0002 | 2000105122

ARTICLE GROUP (AG) : PR3O0002 | ARTICLE FAMILY (AF) : **Electronic taps** | PRODUCT GROUP (PG) : **Taps**

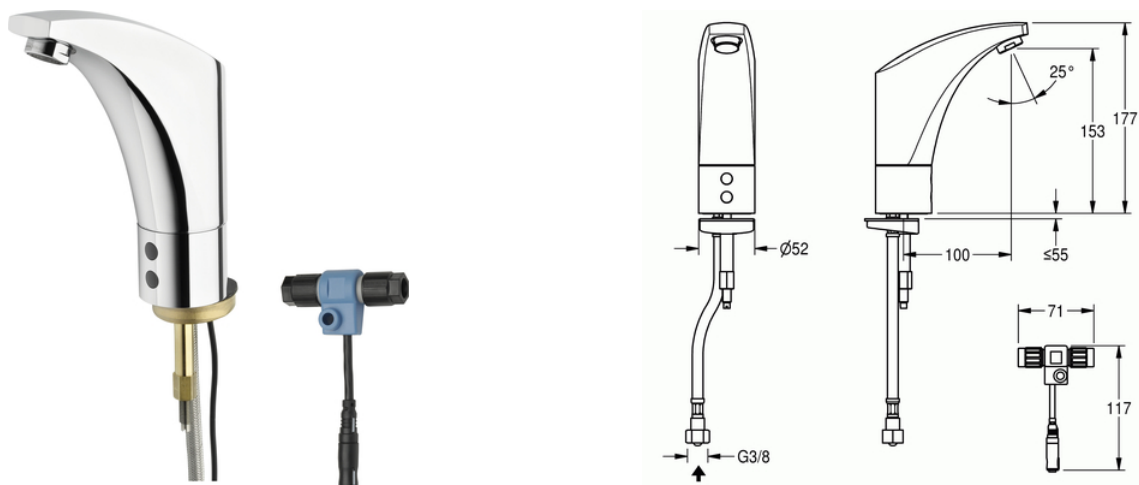

PROTRONIC-T - A3000 open non-touch, opto-electronically controlled washbasin tap DN 15, for connecting to pre-mixed warm water or cold water, featuring compact design with control electronics, solenoid valve cartridge and sensor integrated in a stable two-piece full-metal housing, polished chromium-plated brass, with theft-resistant aerator with integrated flow controller, with connecting hose, dirt strainer and waterproof electric T-connector for connecting to the system cable. With facility for externally controlling the options such as fittings settings and communication via ECC function controller, 24 V DC.

TECHNICAL DATA

Calculation Flow Rate Cold Water	0.10 liter per seconds
Default Automatic Hygiene Flushing	24H-AFTER-ACTIVITY
Depressurised	NO
Functional Principle	ELECTRONIX-C
Gross Weight	3.00 kg
Diameter Nominal	DN-15-1-2INH
Material Fitting	BRASS
Minimum Flow Pressure	1.00 bar
Type Of Mixing	NO
Net Weight	2.70 kg
Power Supply Connection	A3000-OPEN-24-V-DC
Position Of Power Connection	BOTTOM
Power Consumption	2.5
Protective System Ip	68
Protective Shutdown	YES
Sound Insulation	NO
Spout Projection	100.00 mm
Surface Finish Fitting	CHROMISED
Thermal Disinfection	YES
Type Of Mounting	MOUNTED-ON-PRODUCT
Type Of Operation	SENSOR-OPERATION
Type Of Sensor	OPTO-ELEC-SENSOR
Type Of Tap	PILLAR-TAB



Volume Flow Rate At 3 Bar

0.10 liter per seconds

BASIN TAP

PR300002 | 2000105122

ARTICLE GROUP (AG) : **PR300002** | ARTICLE FAMILY (AF) : **Electronic taps** | PRODUCT GROUP (PG) : **Taps**

MANDATORY ACCESSORY



CABLE

2000100801



CABLE

2000100852



**ECC2 FUNCTION
CONTROLLER**

2000108123

SPARE PARTS



AERATOR

2000101160
