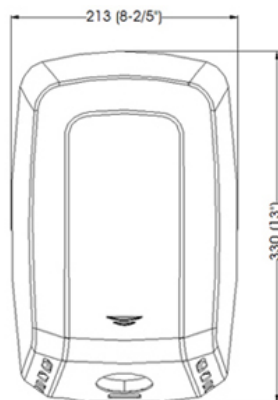


**MACHFLOW STAINLESS STEEL AISI 304  
SATIN FINISH**
**Código: M09ACS**
**General description**

- Sensor operated.
- Maximum air power and effective airflow.
- Long lasting compact units with anti-vandalism features.
- Suitable for high traffic areas.
- Maximum air velocity 325 Km/h.
- It normally goes along with a soap dispenser.


**Components and Materials**

- Stainless steel AISI 304 once-piece cover, satin finish, 1.5 mm thick.
- Cover fixed to the base by means of 2 screws.
- ABS base for wall mounting.
- It includes silent-locks to damp mechanical vibrations.
- Vacuum universal motor brush, F class. RPM may be adjusted manually by means of a potentiometer.
- Automatic disconnection system after 60 seconds of continuous use.
- Fully adjustable IR electronic detection sensor by means of a potentiometer.


**Technical Specifications**

Voltage - 220-240 V	Total power - 420-1.150 W
Frequency - 50/ 60 Hz	Consumption - 3,3-4,7 A
Electrical isolation - Clase I	RPM - 19.000-30.000
Dimensions - 330 x 213 x 170 mm	Air temperature(10 cm distance / 21 °C) - 40 °C
Weight - 4,7 Kg	Noise level (at 2 m) - 68~75 dB
Nominal airflow - 187 m3/h/ 3.120 l/min	Protection level - IP23
Air velocity - 325 Km/h	



Dim.: ±4%

**Operation**

Place the hands under the air outflow valve. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. The appliance will stop 2 seconds after the hands are removed from the airflow.

**Instalation**

Please refer to Back

**Certificates & Qualifications**

ISO 9001:2008, CE, GS, EMC (VDE), GOST.  
Compliant with electrical safety directives 2006/95/EC and electro-magnetic compatibility directives 2004/108/CE.

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

mediclinics S.A

